



Z250H FOG-ceptor™ Interceptor Buried Installation

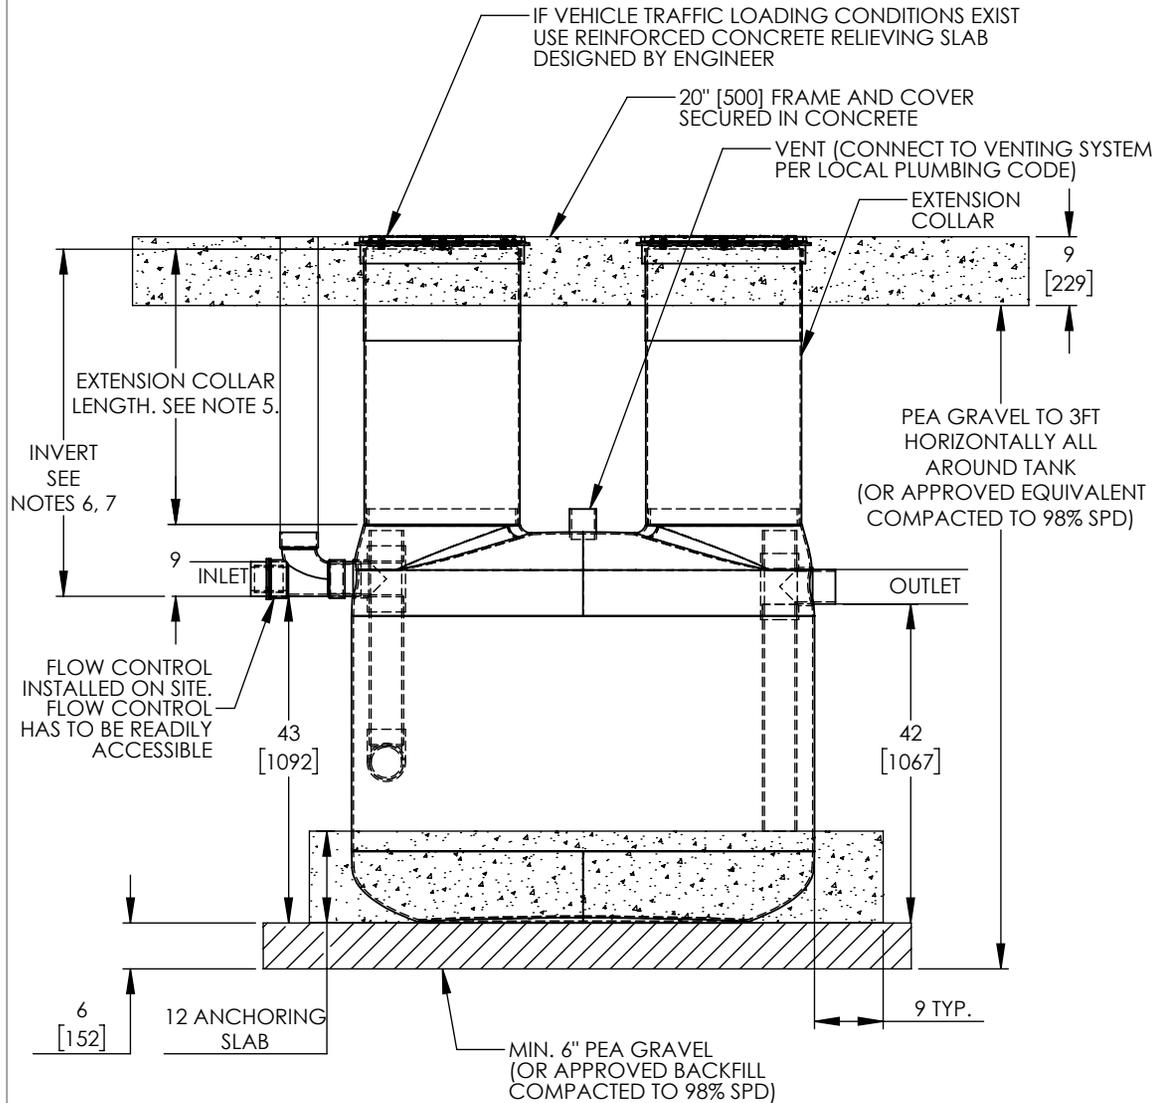

NOTES:

1. REFER TO INSTALLATION PROCEDURE AND INSTALLATION CHECKLIST.
2. ZURN INTERCEPTORS MUST BE INSTALLED IN ACCORDANCE WITH ALL RELEVANT FEDERAL, PROVINCIAL/STATE, AND LOCAL CODES INCLUDING LOCAL PLUMBING CODE.
3. FOR TRAFFIC AREA INSTALLATIONS WITH 3 FOOT BURIAL DEPTH, ANTI-BUOYANCY SLAB IS NOT REQUIRED. FOR INSTALLATIONS DEEPER THAN 3 FEET, PLEASE CONTACT YOUR LOCAL ZURN REPRESENTATIVE.
4. UNIT MUST BE INSTALLED WITH PROVIDED FLOW CONTROL.
5. STANDARD BURIAL DEPTH IS 3 FEET WITH SUPPLIED EXTENSION COLLARS. FOR BURIAL DEPTH UP TO 6 FEET MAXIMUM, ADDITIONAL 3 FEET LONG EXTENSION COLLAR COUPLINGS (PART Z250H EXT B) MAY BE PURCHASED. BURIAL DEPTH NOT TO EXCEED 6 FEET TOTAL.
6. USING STANDARD 3FT COLLAR RESULTS IN 45".
7. MAX TO BE 81". MINIMUM WITH TRAFFIC LOAD TO BE 27", MINIMUM WITHOUT TRAFFIC TO BE 21"

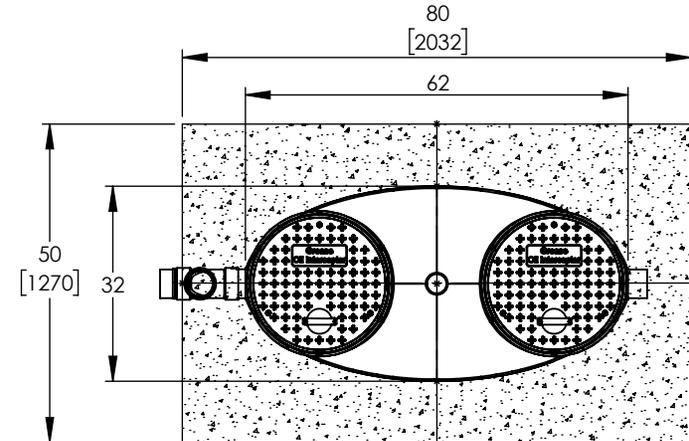

ANCHORING SLAB DETAIL

MODEL	DRY WEIGHT
Z250H	200 LBS [91 KG]

TITLE: Z250H FOG-ceptor™
 250 250 US GALLONS
 4" INLET & OUTLET
 20" ACCESSWAY
 ALL DIMENSIONS IN INCHES

PROJECT: WO:

NOTES

REV	DATE	DRAWN
1	JAN. 20, 2016	
2	JAN. 25, 2016	
3	JAN. 29, 2016	
4	APRIL 21, 2016	
5	APRIL 28, 2016	
6	OCT 24, 2017	
7		
8		
9		
10		

DRAWN BY: S.M.
 DRAWN DATE: NOV. 06, 2015



SIZE	DWG. NO.	REV.
A	Z250H BURIED INSTALL	7

SCALE: 1:20 DO NOT SCALE DRAWING SHEET 1 OF 1