




Z250H
FOG-CEPTOR™
GREASE AND OIL INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

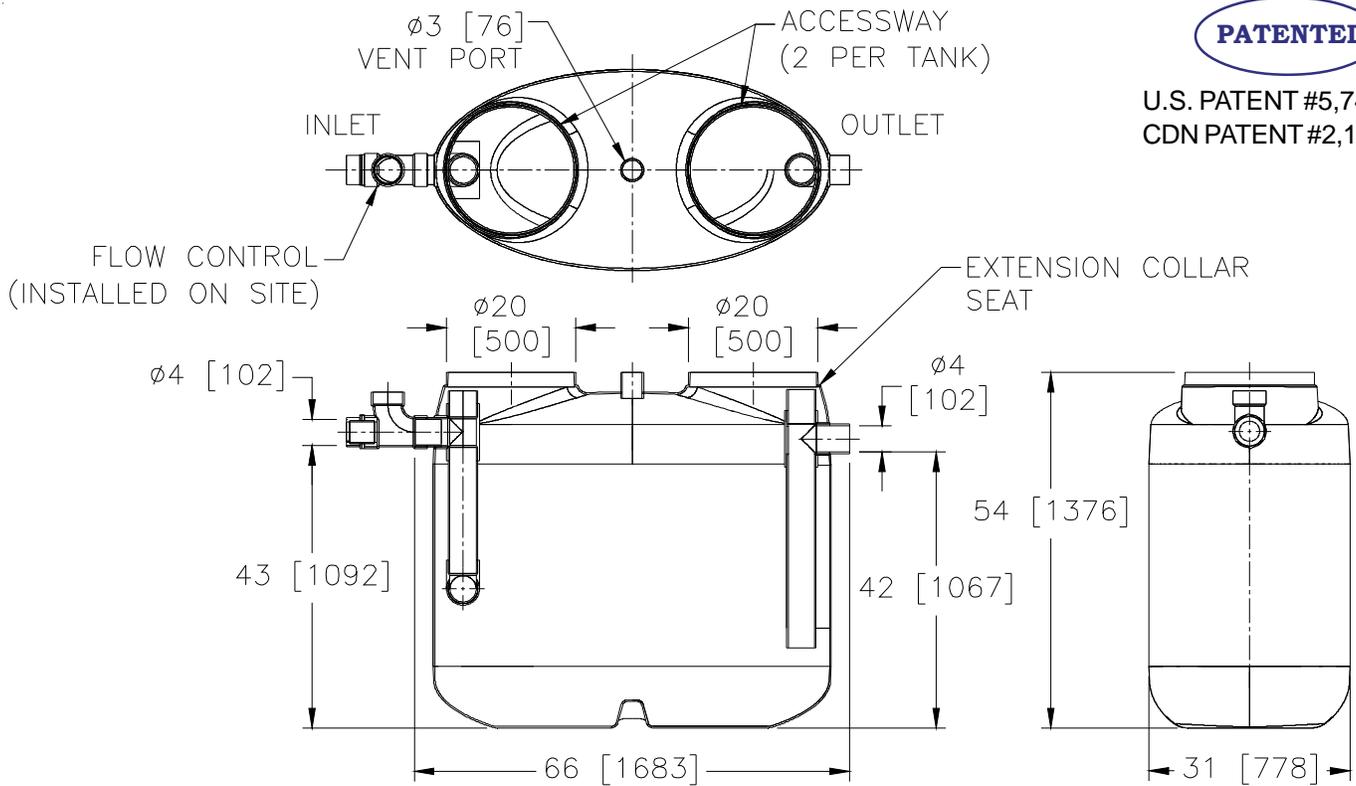

U.S. PATENT #5,746,912
 CDN PATENT #2,195,822

Capacity			
Water Gal. [L]	Grease Gal. [L]	Solids Gal. [L]	Unit Weight lbs. [kg]
250[946]	189[715]	48[182]	425[193]

ENGINEERING SPECIFICATION: ZURN Z250H

FOG-CEPTOR™ Engineered fiberglass dual manway interceptor with external flow control device. PDI and IAPMO rated at 100 GPM [379 LPM] and 200 lb. [91 kg]. Regularly furnished with 4" [102 mm] schedule 40 PVC inlet and outlet. Includes two 20" [508 mm] diameter H-20 rated fiberglass bolted and gasketed frames and covers and two 3' [914 mm] high x 20" [508 mm] diameter extension collars. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

___ Z Fiberglass Reinforced Plastic (Engineered Fiberglass)*

COVERS

- Above Ground
- Kitchen Burial with Pedestrian Traffic
- Outside Burial H-20 Traffic Rated



IAPMO Approved

EXTENSION COLLAR

Two 3' [914 mm] High x 20" [508 mm] Diameter Fiberglass Collars for Buried Applications

* Regularly furnished unless otherwise specified.