


NOTES

ALL Z-50H UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS.

1. PHYSICAL CHARACTERISTICS AND THICKNESS: POLYESTER RESIN AND E GLASS MINIMUM THICKNESS 5/16" TOP AND WALL AND 3/8" BOTTOM
2. ALL Z-50H UNITS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTION
3. STANDARD PIPING IS SCH. 40 PVC
4. Z-50H UNITS COME STANDARD WITH 4" INLET AND OUTLET EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL
5. COVERS AVAILABLE FOR H2O TRAFFIC LOADING, PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION
7. LIFETIME WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE DUE TO MANUFACTURING DEFECTS

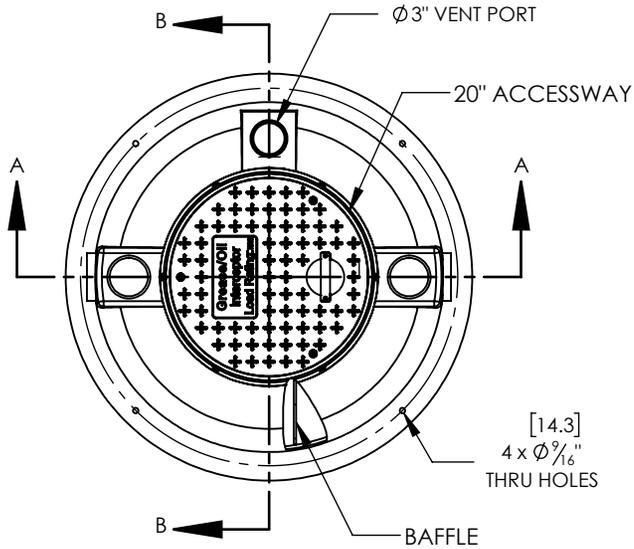

ZURN
GreenTurtle


UPC

PDI

MANUFACTURER: ZURN GREEN TURTLE


INTERCEPTOR MODEL NUMBER: Fog-Ceptor Z-50H
 STANDARDS: PDI G-101, ASME A112.14.3 & CSA B481.1
 LIQUID CAPACITY (WORKING VOLUME): 65 US GAL
 RATED FLOW: 50 GPM
 PRODUCT TYPE: TYPE A RATING
 ASME EFFICIENCY AT RATED CAPACITY: 93.4%
 TESTED GREASE CAPACITY: 100 LBS
 NOMINAL INLET SIZE: 4"
 EXTERNAL FLOW CONTROL REQUIRED: Z1108 50 GPM
 ACCESS COVER LOAD: S (CSA) & H20 (OTHERS)
 MONTH/YEAR OF MANUFACTURE:

COVERS WILL CARRY A LABEL SHOWING: :
 ACCESS COVER LOAD: S (CSA)
 TEMPERATURE: -34° C TO 71° C

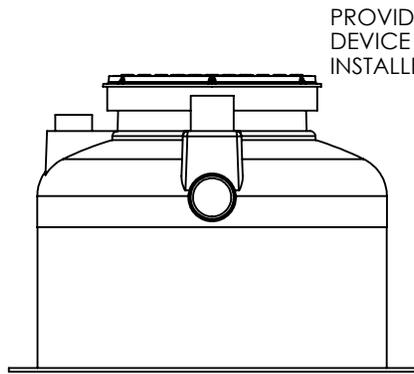


LEFT VIEW


PROVIDED FLOW CONTROL DEVICE (NOT SHOWN) TO BE INSTALLED ON SITE

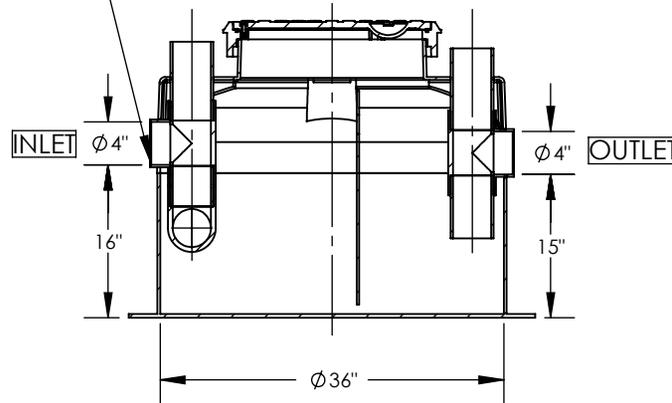

SECTION A-A

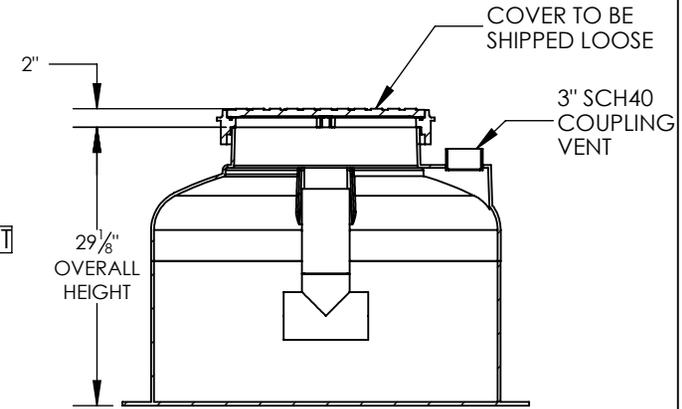

SECTION B-B

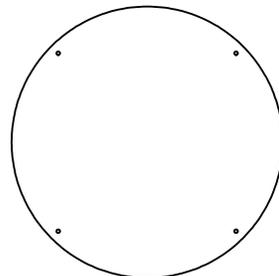

BOTTOM VIEW

TOTAL WET VOLUME	65 GAL
MAX GREASE CAPACITY	130 LBS
MAX SOLID CAPACITY	
FLOW RATING	50 GPM
MAX TEMPERATURE	160 F
MIN. TEMPERATURE	- 30 F

DWG. TITLE: Fog-Ceptor Z-50H		
PROJECT:		
DATE: 04/29/20		
SIZE A	DRAWING NOT TO SCALE	DWG #: 19-4816-C
		REV. 7