

INSTRUCTION SHEET ZW1070 SERIES TMV ROMAN BATH APPLICATIONS





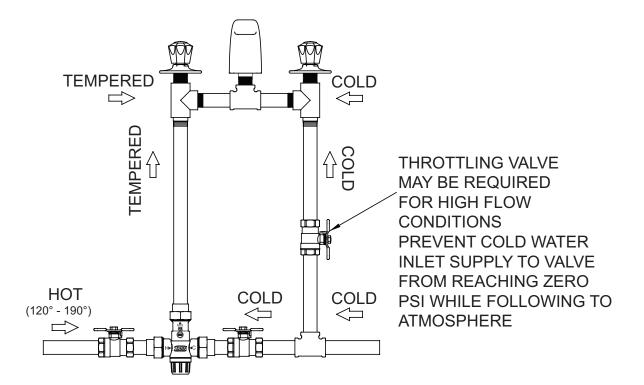

TYPICAL HORIZONTAL FEED FOR INSTALLATIONS WHERE TEMPERED OUTLET IS HORIZONTAL IT IS RECOMMENDED TO PLUMB THE HOT WATER FEED FROM ABOVE THE VALVE TO INSURE PROPER THERMOSTATIC OPERATION.

TYPICAL ROMAN BATH INSTALLATION FOR INSTALLATIONS WHERE TEMPERED OUTLET IS VERTICAL IT IS RECOMMENDED NOT TO EXCEED 190° ON THE HOT WATER FEED TEMPERATURE TO INSURE PROPER THERMOSTATIC OPERATION.

NOTE: CHECK VALVES MUST BE USED FOR BOTH HOT AND COLD FEEDS TO THE DEVICE IN EITHER CONFIGURATION.

