

INDEX PAGE for 12" Wide Grates / Covers

 - Click on "Item ID" to go to grate page, "Back to Index" will return you to this page.

P12-ADA-USA	ADA Compliant Grate, Ductile Iron	P12-RFG	Reinforced Galvanized Grate, Steel
P12-BDC	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P12-RFGC	Reinforced Galvanized Grate, Steel
P12-BDE	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P12-RFS	Reinforced Grate, Stainless Steel
P12-BDE-USA	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P12-RFSC	Reinforced Grate, Stainless Steel
P12-BG	Slotted Bar Grate, Galvanized Ductile Iron	P12-RPG	Reinforced Perforated Grate, Galvanized Steel
P12-BG-L	Slotted Bar Grate, Galvanized Steel	P12-RPGC	Reinforced Perforated Grate, Galvanized Steel
P12-DC	Solid Cover, Ductile Iron	P12-RPGR	Reinforced Raised Perforated Grate, Galvanized Steel
P12-DC-G	Solid Cover, Galvanized Ductile Iron	P12-RPGRC	Reinforced Raised Perforated Grate, Galvanized
P12-DGC	Slotted Grate, Ductile Iron	P12-RPS	Reinforced Perforated Grate, Stainless Steel
P12-DGC-USA	Slotted Grate, Ductile Iron	P12-RPSC	Reinforced Perforated Grate, Stainless Steel
P12-DGE	Slotted Grate, Ductile Iron	P12-RPSR	Reinforced Raised Perforated Grate, Stainless Steel
P12-DGE-USA	Slotted Grate, Ductile Iron	P12-RPSRC	Reinforced Raised Perforated Grate, Stainless Steel
P12-DGF	Slotted Grate, Ductile Iron	P12-SBG-L	Slotted Bar Grate, Stainless Steel
P12-FG	Fabricated Grate, Galvanized Steel	P12-SSCD	Reinforced Cover, Stainless Steel
P12-FS	Fabricated Grate, Stainless Steel		
P12-GADA-USA	ADA Compliant Grate, Galvanized Ductile Iron		
P12-GDC	Slotted Grate, Galvanized Ductile Iron		
P12-GDC-USA	Slotted Grate, Galvanized Ductile Iron		
P12-GDE	Slotted Grate, Galvanized Ductile Iron		
P12-GDE-USA	Slotted Grate, Galvanized Ductile Iron		
P12-GDF	Slotted Grate, Galvanized Ductile Iron		
P12-GG	Slotted Grate, Vinylester Fiberglass		
P12-GHPD	Heel-Proof Longitudinal Grate, Galvanize Ductile Iron		
P12-GHPDE	Heel-Proof Longitudinal Grate, Galvanized Ductile Iron		
P12-GHPDE-USA	Heel-Proof Longitudinal Grate, Galvanized Ductile Iron		
P12-HPD	Heel-Proof Longitudinal Grate, Ductile Iron		
P12-HPDE	Heel-Proof Longitudinal Grate, Ductile Iron		
P12-HPDE-USA	Heel-Proof Longitudinal Grate, Ductile Iron		
P12-PG	Perforated Grate, Galvanized Steel		
P12-PGR	Raised Perforated Grate, Galvanized Steel		
P12-PS	Perforated Grate, Stainless Steel		
P12-PSR	Raised Perforated Grate, Stainless Steel		




P12-ADA-USA

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	1	84257	P12-ADA-USA

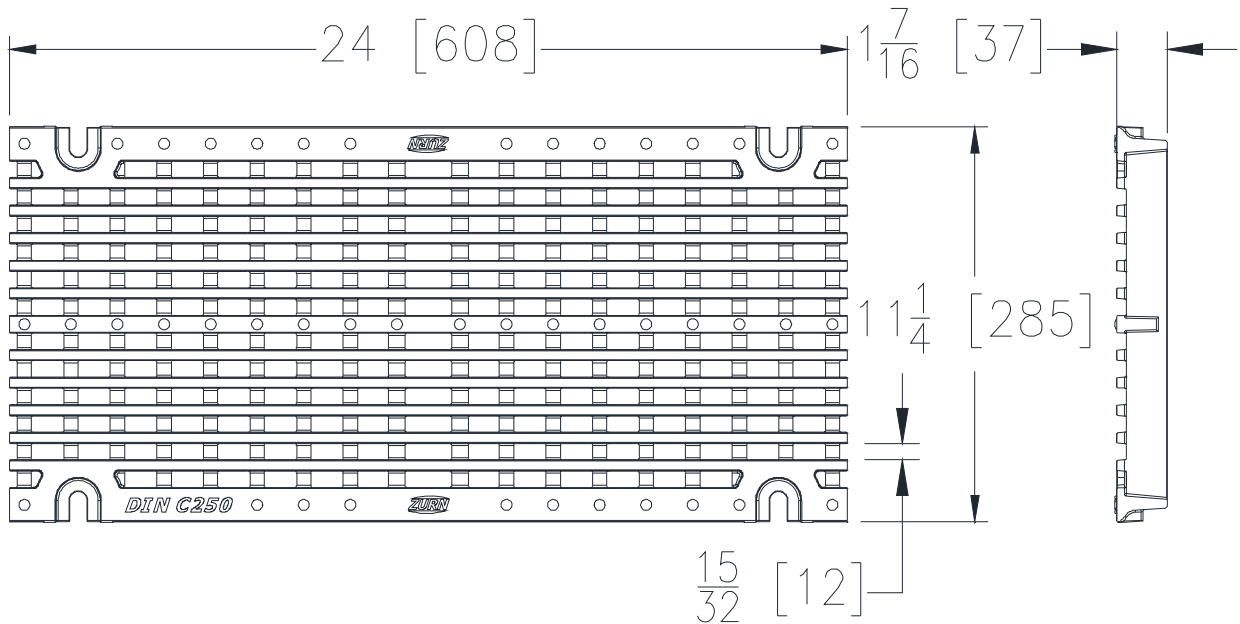

ADA-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-ADA-USA

Ductile Iron Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 15.6 lbs [7 kg] per linear foot. The grate has an open area of 65.2 in² [421 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, ADA compliant, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.



ADA-USA- ADA Compliant	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	15.6 lbs/ft. [7 kg]
Open Area:	65.2 sq. in ² /ft. [421 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway, ADA
Slot Width/Hole Size:	15/32 [12]
ADA:	Yes
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-BDC


12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	2	84225	P12-BDC

Supersedes
65913

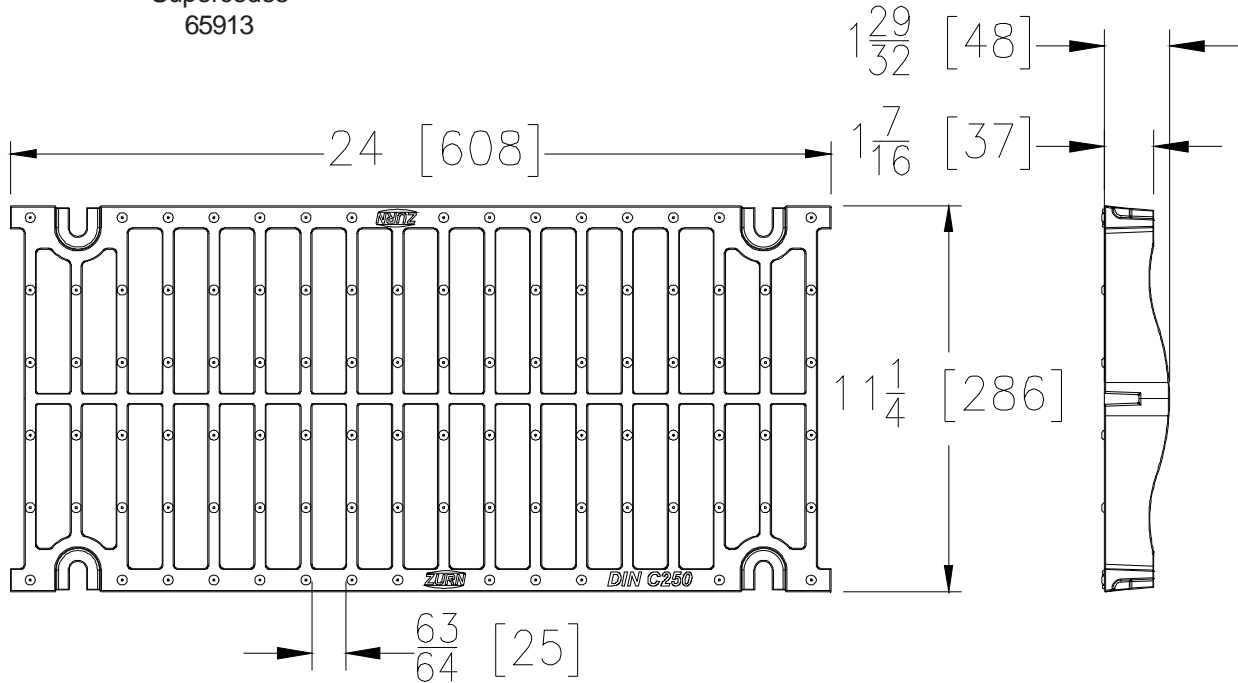

BDC GRATE ENGINEERING SPECIFICATION: The Zurn P12-BDC

Black Acid Resistant Epoxy Coated Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14.7 lbs [7 kg] per linear foot. The grate has an open area of 86.7 in² [559 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

BDC -Black Acid Resistant Ductile	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	14.7 lbs/ft. [7 kg]
Open Area:	86.7 in ² /ft. [559 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Vehicle & Truck
Slot Width/Hole Size:	63/64 [25]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-BDE


12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	3	82038	P12-BDE

Supersedes
63958

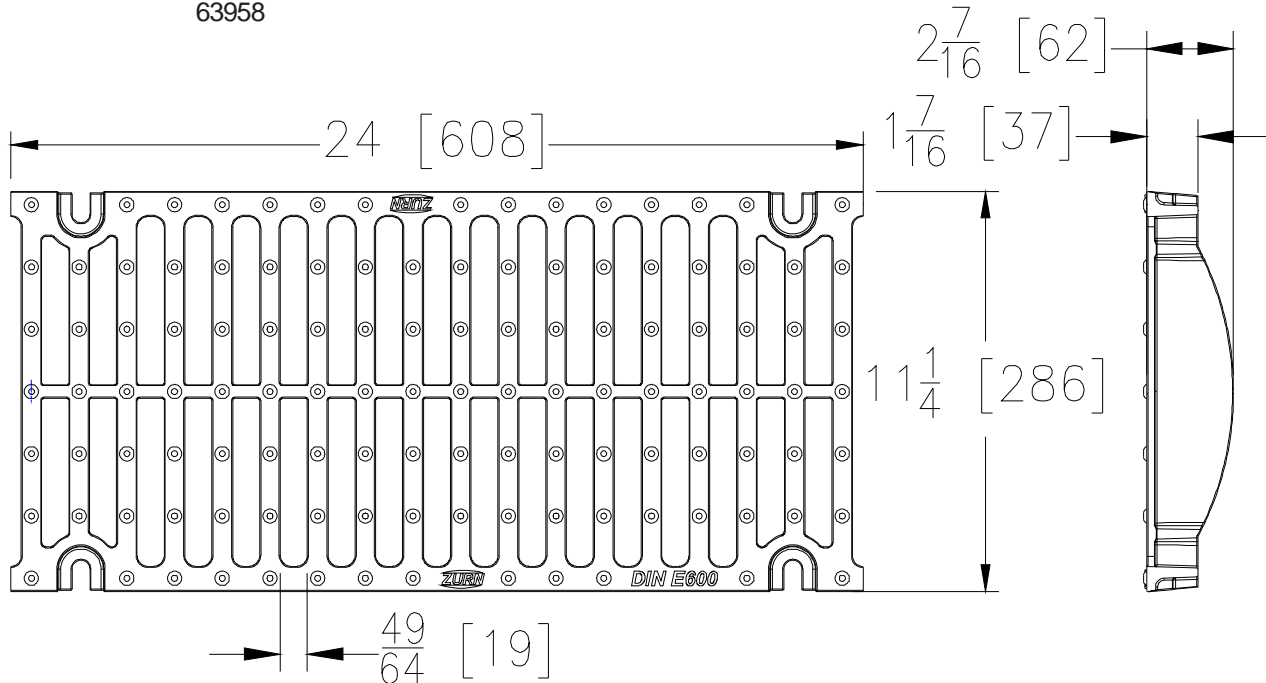

BDE GRATE ENGINEERING SPECIFICATION: The Zurn P12-BDE

Black Acid Resistant Epoxy Coated Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.8 lbs [9 kg] per linear foot. The grate has an open area of 60.3 in² [389 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

BDE -Black Acid Resistant Ductile	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	19.8 lbs/ft. [9 kg]
Open Area:	60.3 in ² /ft. [389 cm ²]
ANSI Rating:	Special-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	49/64 [19]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.



P12-BDE-USA


12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	4	84220	P12-BDE-USA

Supercedes
63958

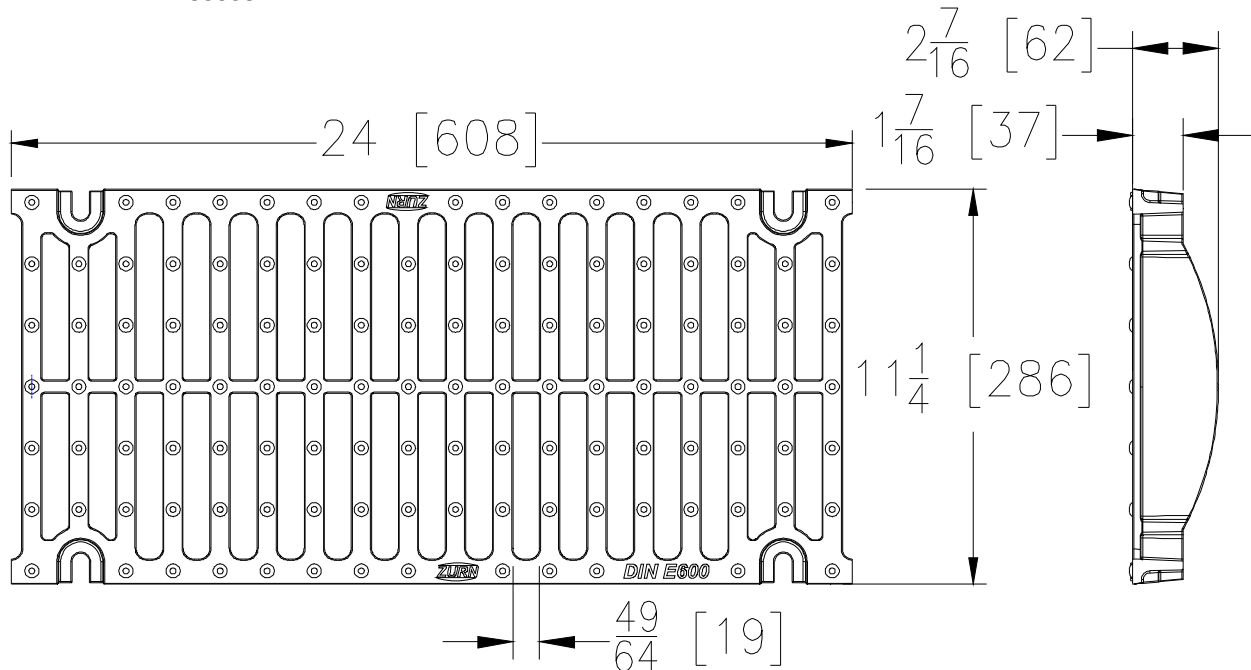

BDE-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-BDE-USA

Black Acid Resistant Epoxy Coated Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.5 lbs [9 kg] per linear foot. The grate has an open area of 60.3 in² [389 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.



BDE-USA -Black Acid Resistant Ductile	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	19.5 lbs/ft. [9 kg]
Open Area:	60.3 in ² /ft. [389 cm ²]
ANSI Rating:	Special-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	49/64 [19]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-BG

12 [305] Wide Bar Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	5	62230	P12-BG

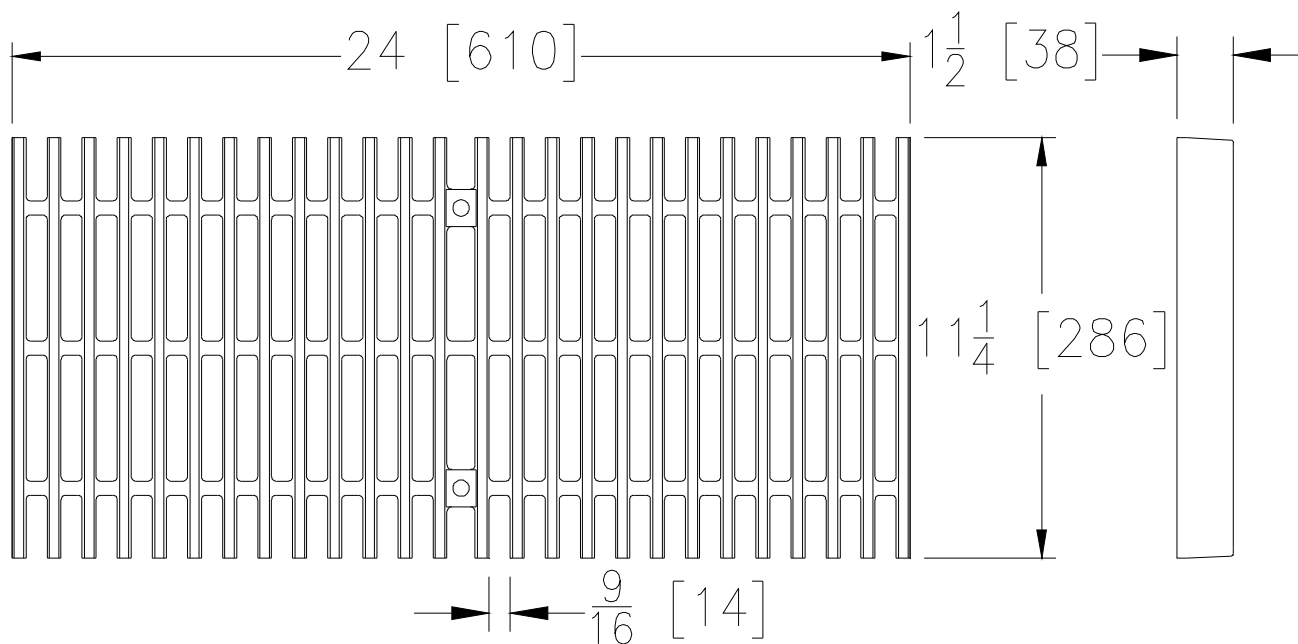

BG GRATE ENGINEERING SPECIFICATION: The Zurn P12-BG

Galvanized Ductile Iron Slotted Bar Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.7 lbs [9 kg] per linear foot. The grate has an open area of 73.9 in² [477 cm²] per linear foot, DIN Rating of D, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

BG - Galvanized Bar Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class D
Weight:	19.7 lbs/ft. [9 kg]
Open Area:	73.9 in ² /ft. [477 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	9/16 [14]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-BG-L

12 [305] Wide Bar Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	6	94015	P12-BG-L

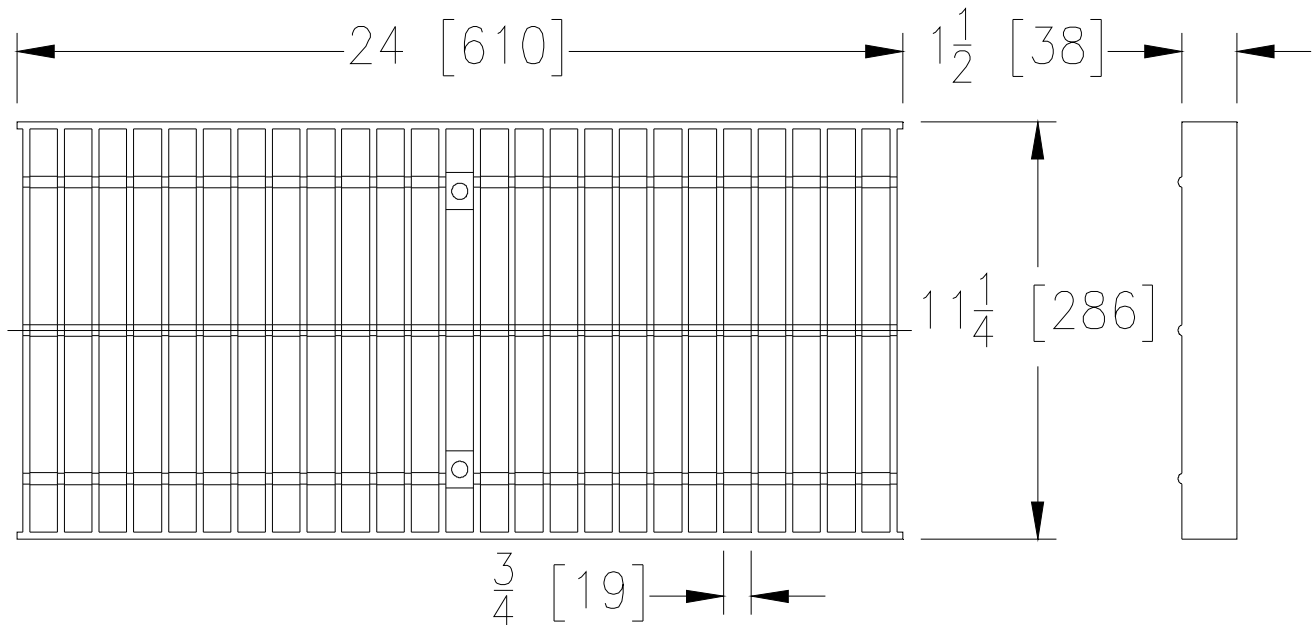

BG-L GRATE ENGINEERING SPECIFICATION: The Zurn P12-BG-L

Galvanized Steel Slotted Bar Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 13.9 lbs [6 kg] per linear foot. The grate has an open area of 101.9 in² [657 cm²] per linear foot, DIN Rating of D, and ANSI Rating of Heavy-Duty. Galvanizing (hot dip) conforms to ASTM specification A123 and Carbon Steel conforms to ASTM specification A36.

BG-L - Galvanized Bar Grate	
Material:	Galvanized Steel
DIN Rating:	Class D
Weight:	13.9 lbs/ft. [6 kg]
Open Area:	101.9 in ² /ft. [657 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	3/4 [19]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-DC

12 [305] Wide Cover

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	7	66352	P12-DC

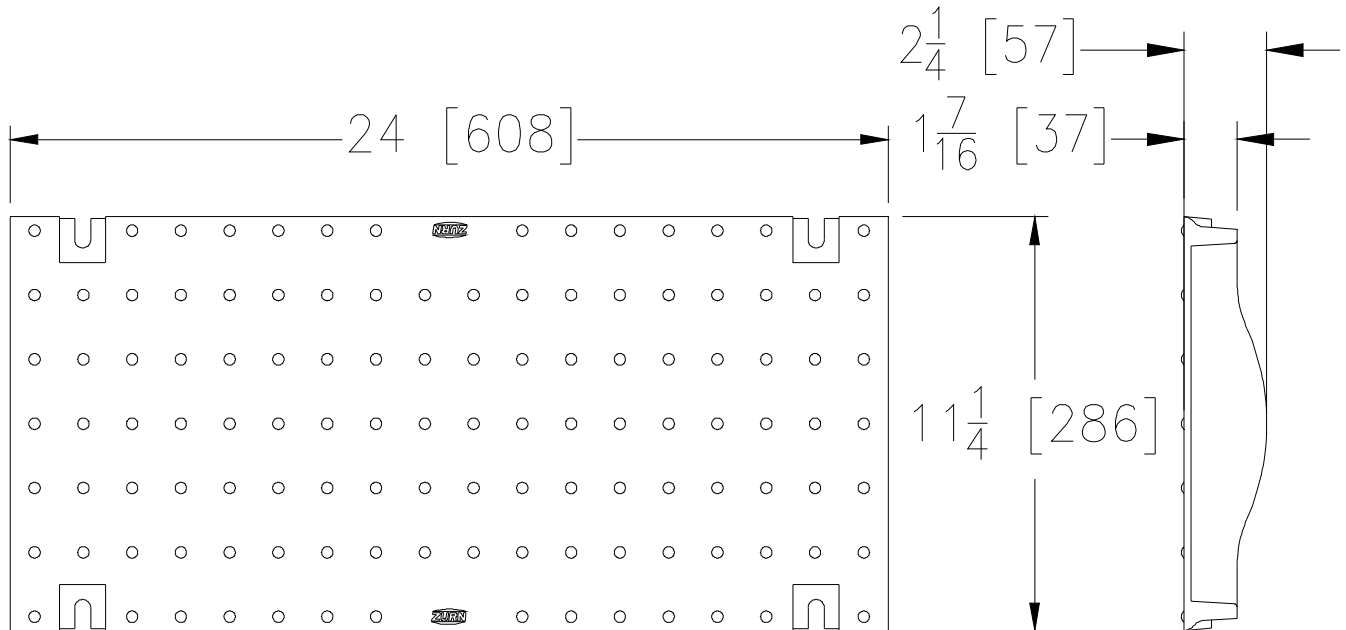

DC GRATE ENGINEERING SPECIFICATION: The Zurn P12-DC

Ductile Iron Solid Cover, is 11-1/4 [286] wide X 24 [610] long, weighing 27.9 lbs [13 kg] per linear foot. The solid ductile iron cover has a DIN Rating of E, ANSI Rating of Special-Duty, ADA Compliant, H-20 Load Rated and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

DC - Solid Cover Ductile	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	27.9 lbs/ft. [13 kg]
Open Area:	N/A
ANSI Rating:	Special-Duty
Application:	Hard Wheel Loads
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-DC-G

12 [305] Wide Cover

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	8	66352	P12-DC-G

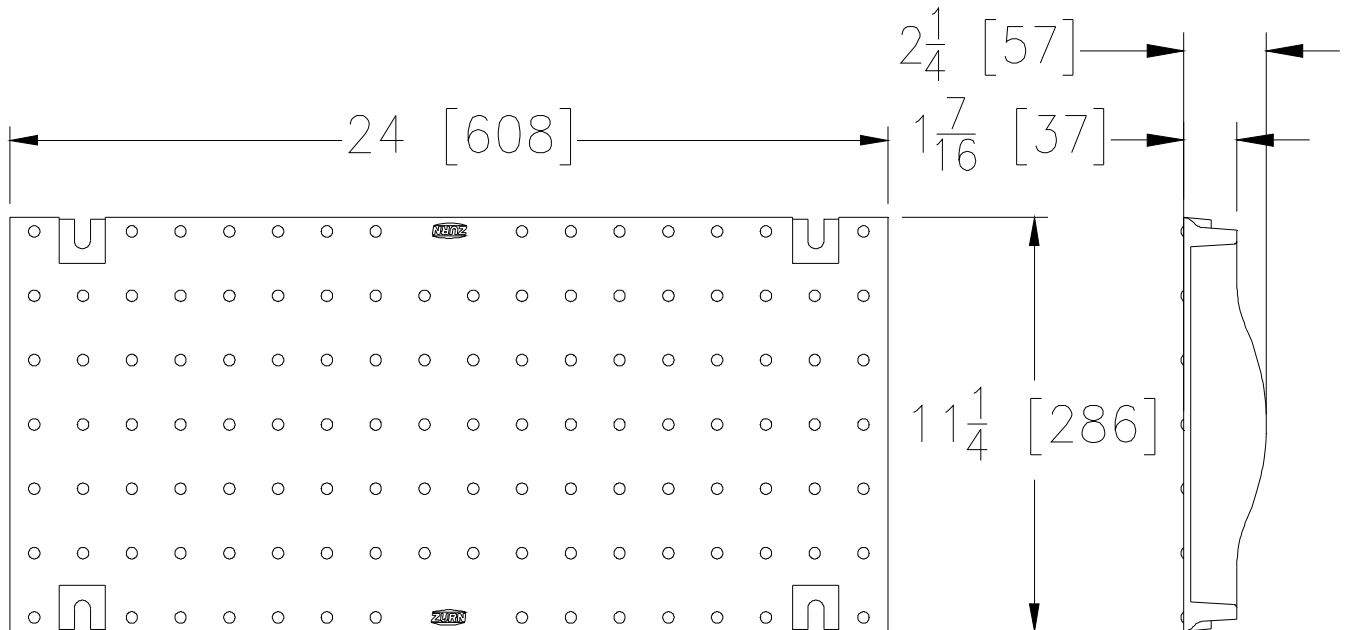

DC GRATE ENGINEERING SPECIFICATION: The Zurn P12-DC-G

Galvanized Ductile Iron Solid Cover, is 11-1/4 [286] wide X 24 [610] long, weighing 27.9 lbs [13 kg] per linear foot. The solid ductile iron cover has a DIN Rating of E, ANSI Rating of Special-Duty, ADA Compliant, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

DC-G - Solid Cover Galvanized Ductile	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	27.9 lbs/ft. [13 kg]
Open Area:	N/A
ANSI Rating:	Special-Duty
Application:	Hard Wheel Loads
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.



P12-DGC


12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	9	84225	P12-DGC

Supersedes
65913

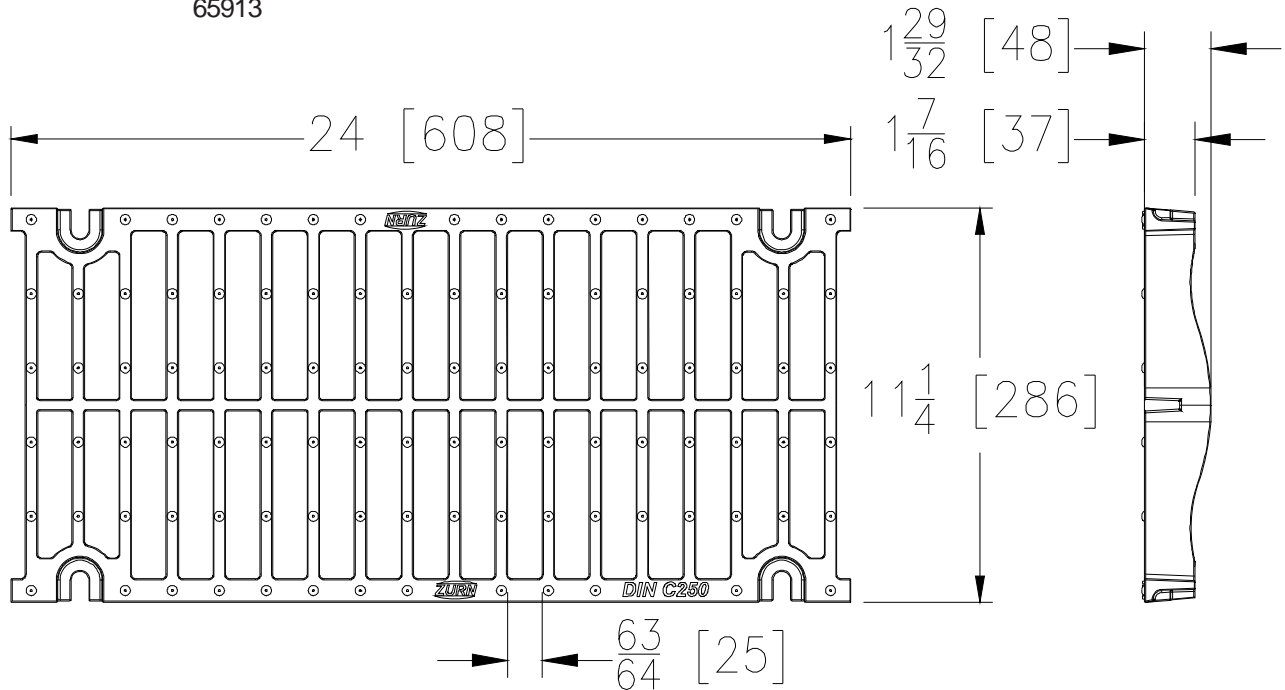

DGC GRATE ENGINEERING SPECIFICATION: The Zurn P12-DGC

Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14.7 lbs [7 kg] per linear foot. The grate has an open area of 86.7 in² [559 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

DGC -Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	14.7 lbs/ft. [7 kg]
Open Area:	86.7 in ² /ft. [559 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Vehicle & Truck
Slot Width/Hole Size:	63/64 [25]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-DGC-USA


12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	10	84225	P12-DGC-USA

Supersedes
65913

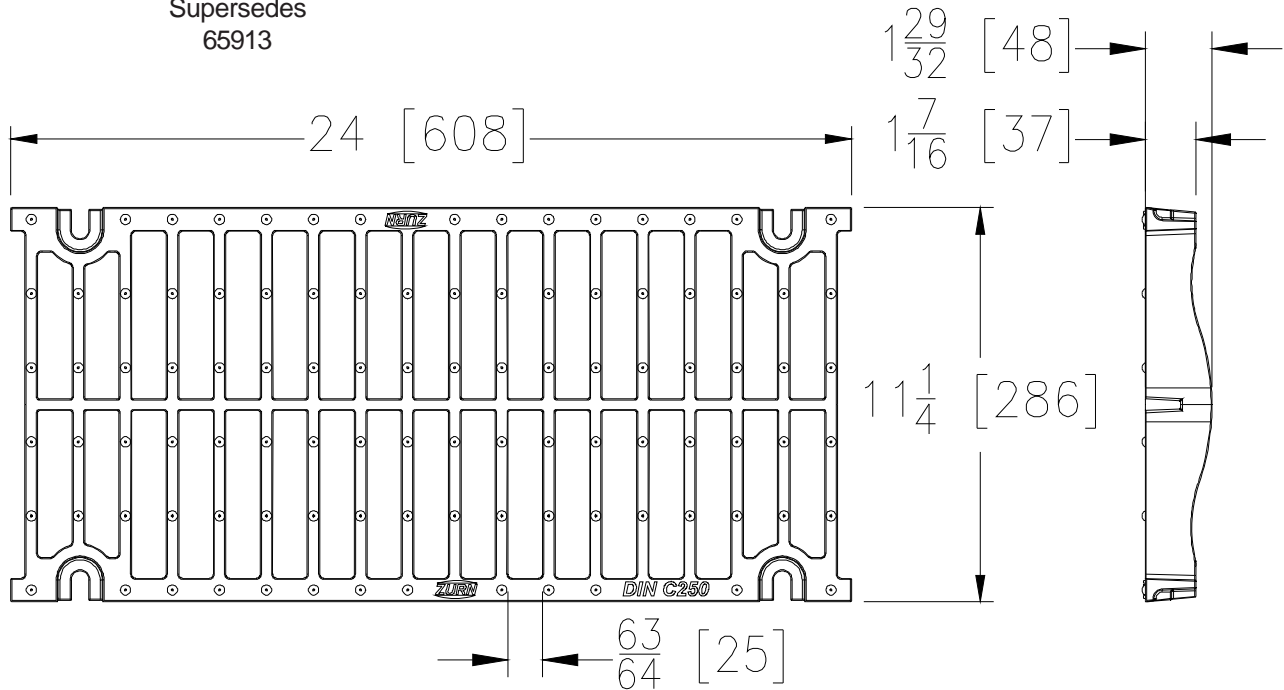

DGC-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-DGC-USA

Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14.7 lbs [7 kg] per linear foot. The grate has an open area of 86.7 in² [559 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.



DGC-USA -Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	14.7 lbs/ft. [7 kg]
Open Area:	86.7 in ² /ft. [559 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Vehicle & Truck
Slot Width/Hole Size:	63/64 [25]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-DGE


12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	11	82038	P12-DGE

Supersedes
63958

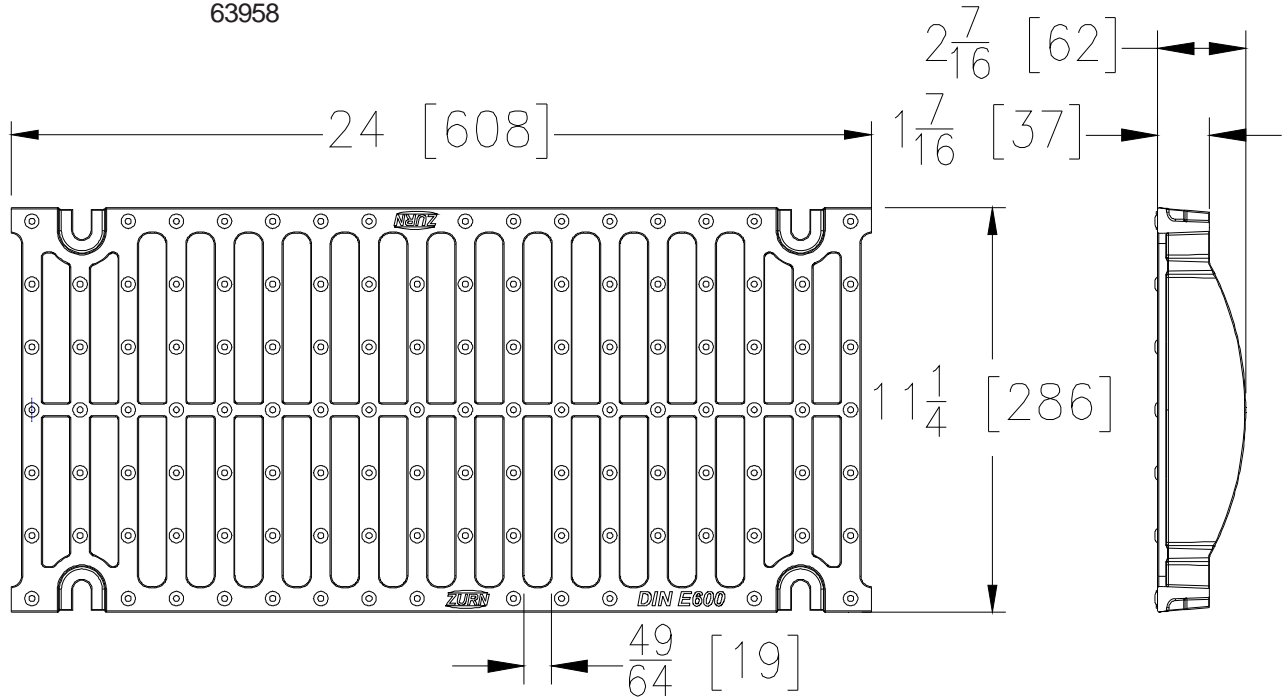

DGE-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-DGE

Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.8 lbs [9 kg] per linear foot. The grate has an open area of 60.3 in² [389 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

DGE - Ductile Iron Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	19.8 lbs/ft. [9 kg]
Open Area:	60.3 in ² /ft. [389 cm ²]
ANSI Rating:	Special-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	49/64 [19]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.



P12-DGE-USA


12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	12	84220	P12-DGE-USA

Supersedes
63958

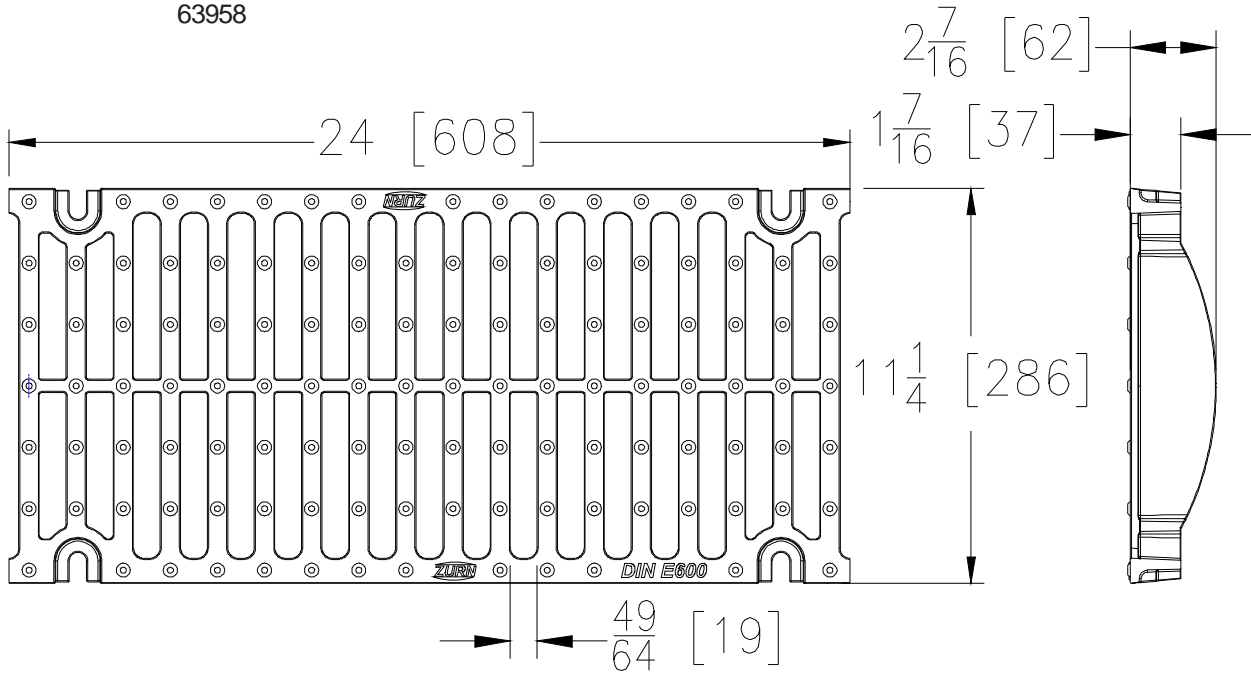

DGE-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-DGE-USA

Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.5 lbs [9 kg] per linear foot. The grate has an open area of 60.3 in² [389 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.



DGE-USA - Ductile Iron Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	19.5 lb/ft. [9 kg]
Open Area:	60.3 in ² /ft. [389 cm ²]
ANSI Rating:	Special-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	49/64 [19]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-DGF

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	13	65868	P12-DGF

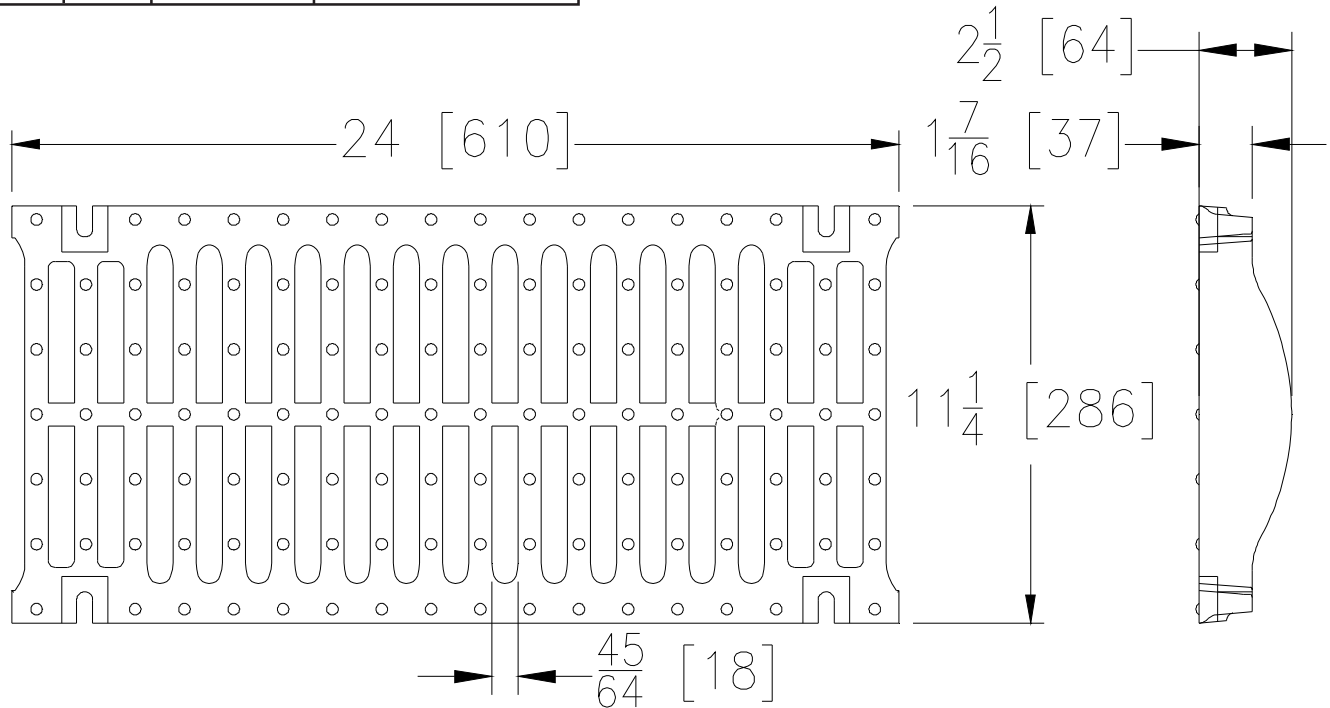

DGF GRATE ENGINEERING SPECIFICATION: The Zurn P12-DGF

Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 26 lbs [12 kg] per linear foot. The grate has an open area of 54 in² [348 cm²] per linear foot, DIN Rating of F, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

DGF - Ductile Iron Slotted	
Material:	Ductile Iron
DIN Rating:	Class F
Weight:	26 lbs/ft. [12 kg]
Open Area:	54 in ² /ft. [348 cm ²]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	45/64 [18]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-FG

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	14	61019	P12-FG

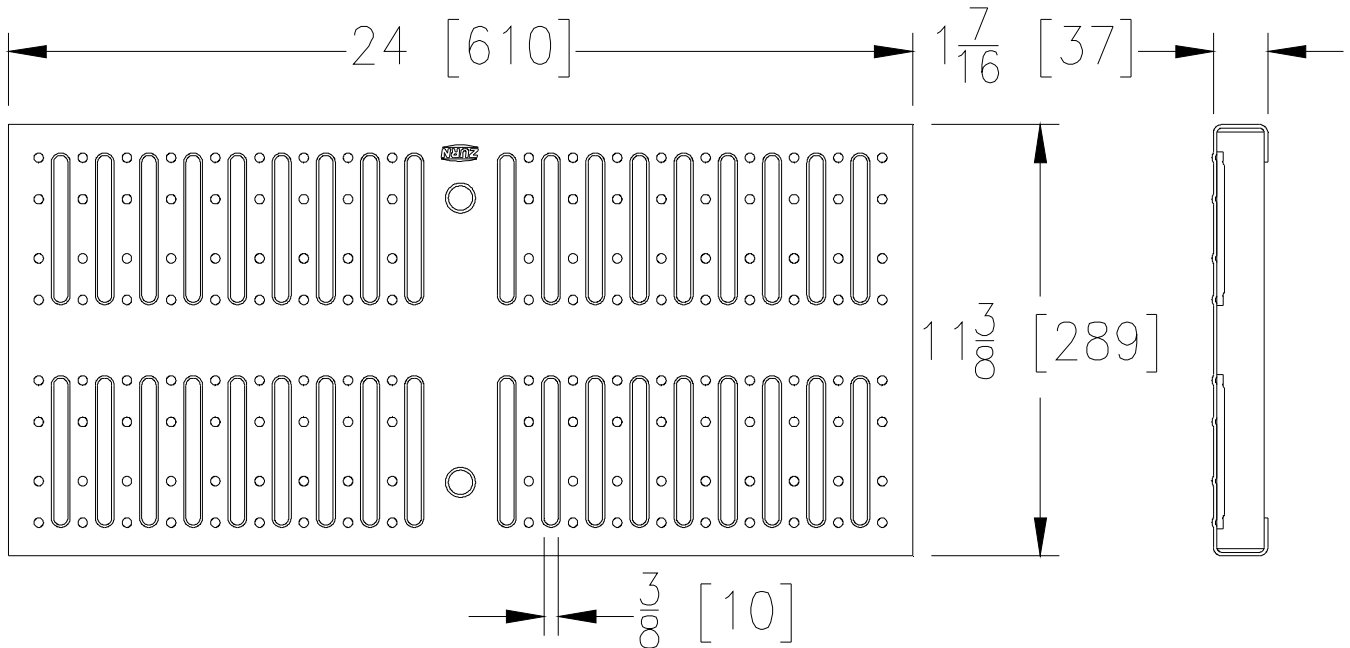

FG GRATE ENGINEERING SPECIFICATION: The Zurn P12-FG

Fabricated Galvanized Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 7.7 lbs [3 kg] per linear foot. The grate has an open area of 25.6 in² [165 cm²] per linear foot, DIN Rating of A, and ANSI Rating of Light-Duty. Carbon Steel conforms to ASTM A36. Galvanized Skin conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle.



FG - Fabricated Galvanized	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	7.7 lbs/ft. [3 kg]
Open Area:	25.6 in ² /ft. [165 cm ²]
ANSI Rating:	Light-Duty
Application:	Pedestrian
Slot Width/Hole Size:	3/8 [10]
ADA:	No
H-20:	No

* Regularly furnished unless otherwise specified.




P12-FS

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	15	61019	P12-FS

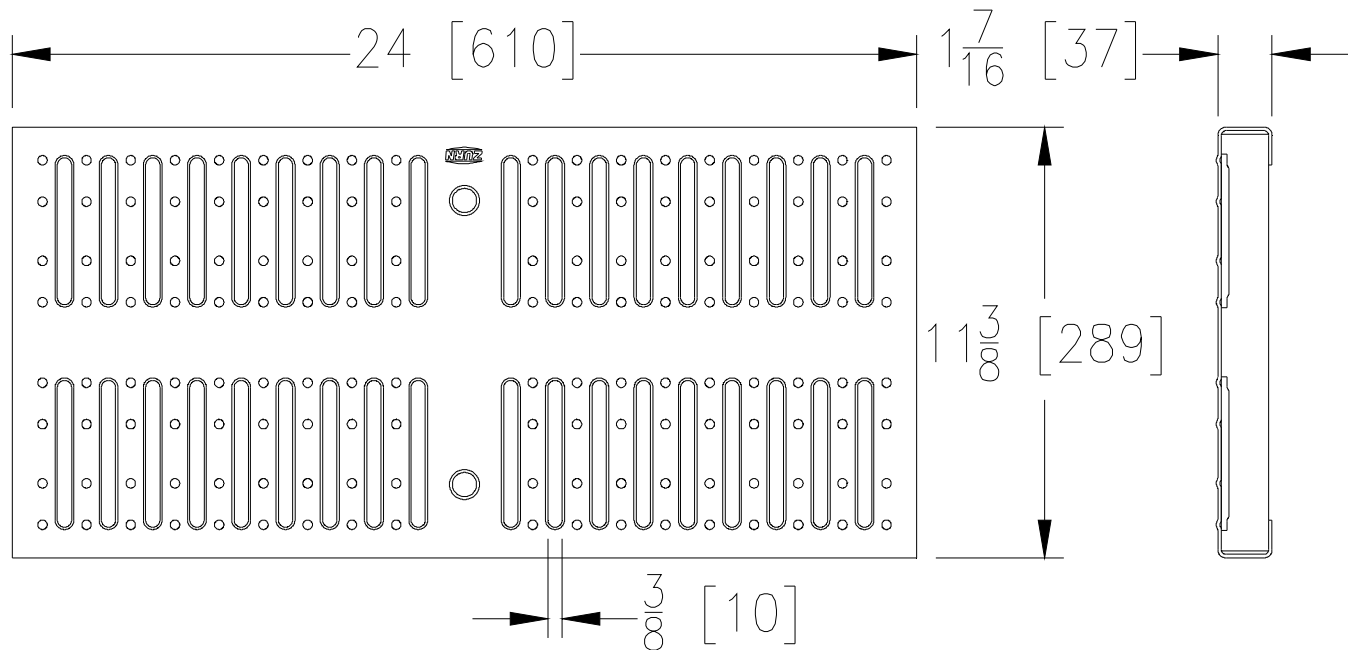

FS GRATE ENGINEERING SPECIFICATION: The Zurn P12-FS

Fabricated Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 7.9 lbs [4 kg] per linear foot. The grate has an open area of 25.6 in² [165 cm²] per linear foot, DIN Rating of A, and ANSI Rating of Light-Duty. Stainless Steel conforms to ASTM A240 grade CF8 (Type 304 or 316 by request).



FS - Fabricated Slotted	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	7.9 lbs/ft. [4 kg]
Open Area:	25.6 in ² /ft. [165 cm ²]
ANSI Rating:	Light-Duty
Application:	Pedestrian
Slot Width/Hole Size:	3/8 [10]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-GADA-USA

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	16	84257	P12-GADA-USA

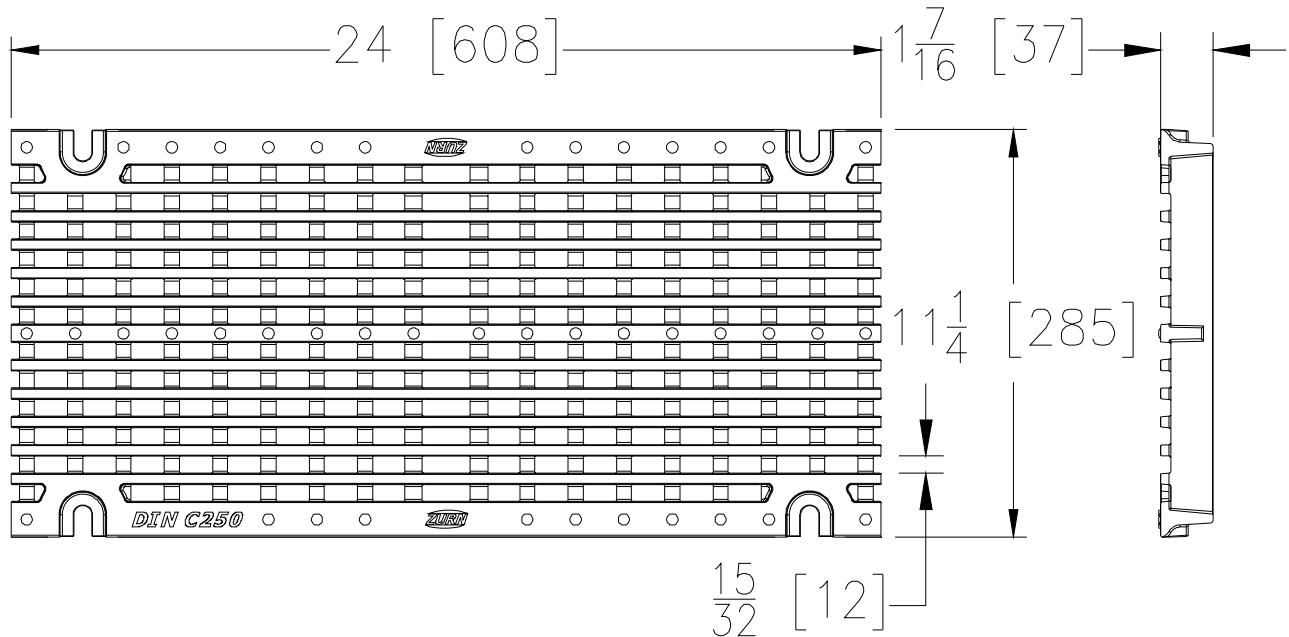

GADA-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-GADA-USA Galvanized Ductile Iron ADA Compliant Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 15.6 lbs [7 kg] per linear foot. The grate has an open area of 65.2 in² [421 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, ADA compliant, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.



GADA-USA- ADA Compliant	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	15.6 lbs/ft. [7 kg]
Open Area:	65.2 in ² /ft. [421 cm ²]
ANSI Rating:	Heavy-Duty
Application:	ADA, Roadway
Slot Width/Hole Size:	15/32 [12]
ADA:	Yes
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-GDC


12 [305] Wide

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	17	84225	P12-GDC

Supersedes
63913

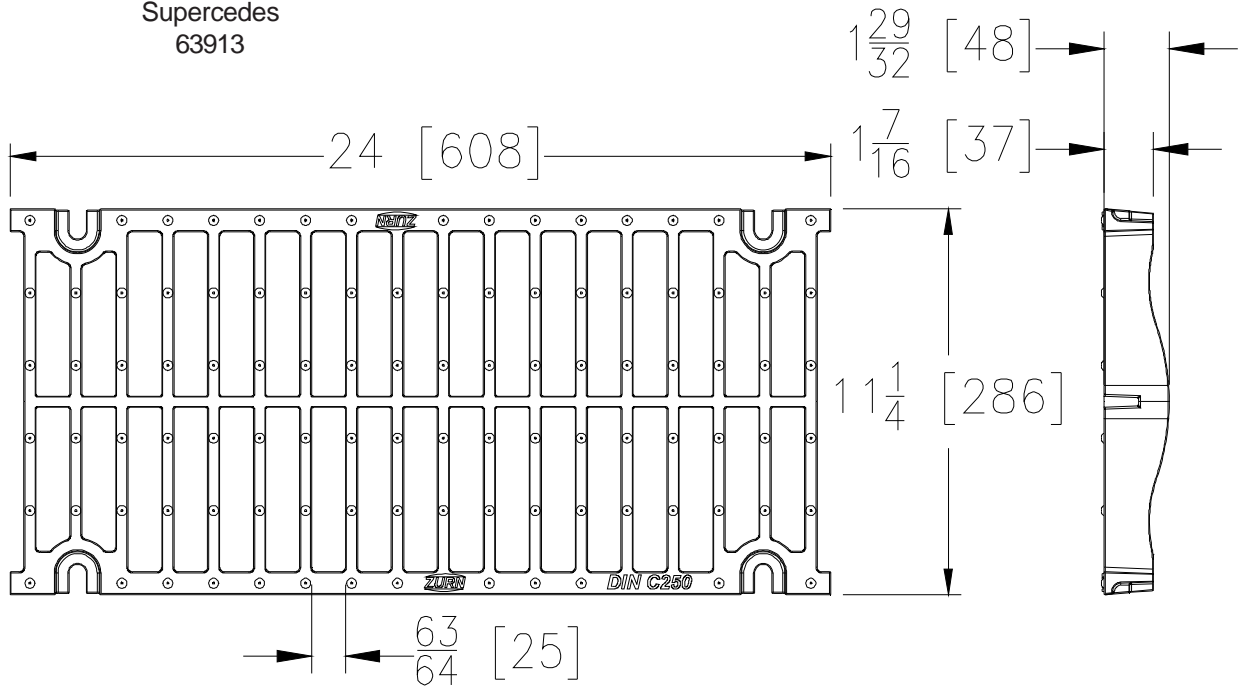

GDC GRATE ENGINEERING SPECIFICATION: The Zurn P12-GDC

Galvanized Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14.7 lbs [7 kg] per linear foot. The grate has an open area of 80.8 in² [521 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

GDC - Galvanized Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	14.7 lbs/ft. [7 kg]
Open Area:	80.8 in ² /ft. [521 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Vehicle & Truck
Slot Width/Hole Size:	63/64 [25]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-GDC-USA


12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	18	84225	P12-GDC-USA

Supersedes
63913

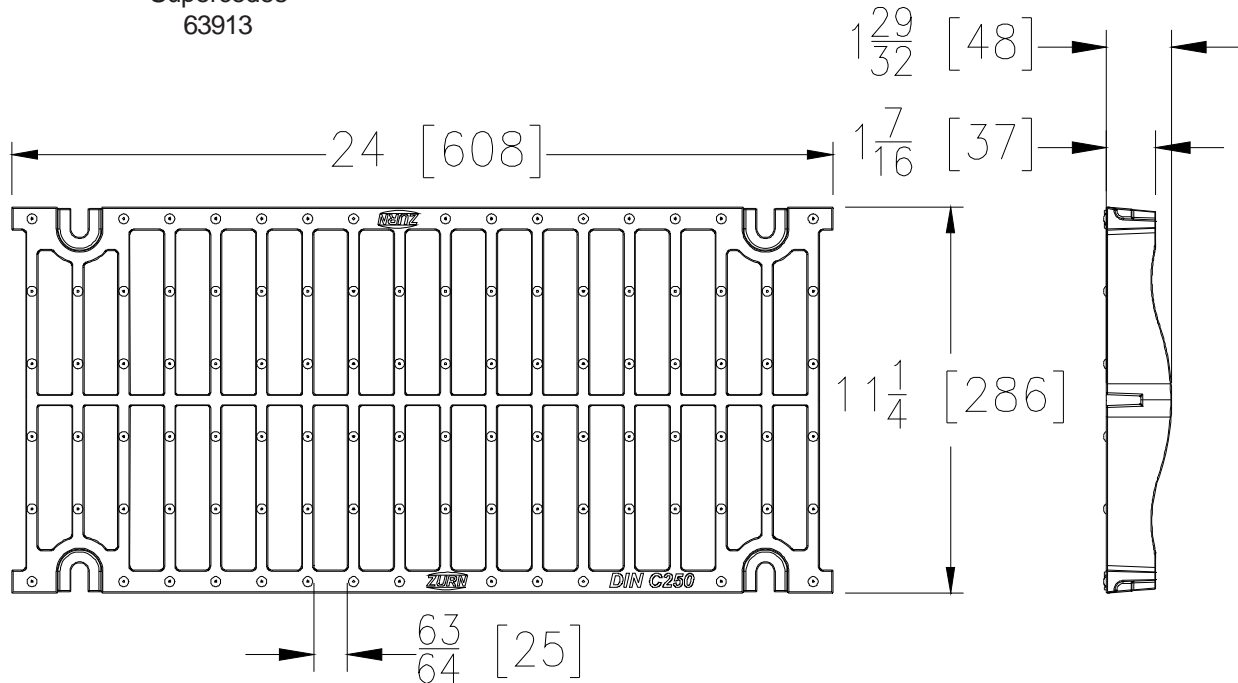

GDC-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-GDC-USA

Galvanized Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14.7 lbs [7 kg] per linear foot. The grate has an open area of 86.7 in² [559 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.



GDC-USA -Galvanized Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	14.7 lbs/ft. [7 kg]
Open Area:	86.7 in ² /ft. [559 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Vehicle & Truck
Slot Width/Hole Size:	63/64 [25]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.



P12-GDE


12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	19	82038	P12-GDE

Supersedes
63958

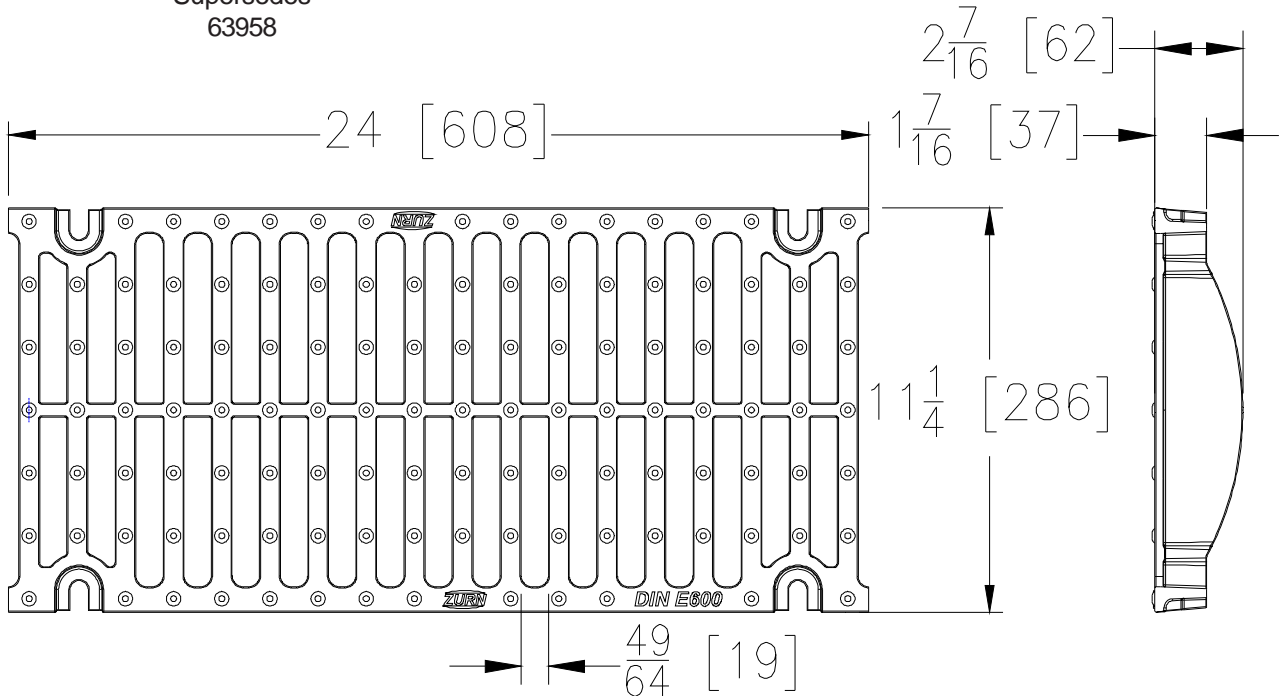

GDE GRATE ENGINEERING SPECIFICATION: The Zurn P12-GDE

Galvanized Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.8 lbs [9 kg] per linear foot. The grate has an open area of 60.3 in² [389 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

GDE - Galvanized Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	19.8 lbs/ft. [9 kg]
Open Area:	60.3 in ² /ft. [389 cm ²]
ANSI Rating:	Special-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	49/64 [19]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.



P12-GDE-USA


12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	20	84220	P12-GDE-USA

Supersedes
63958

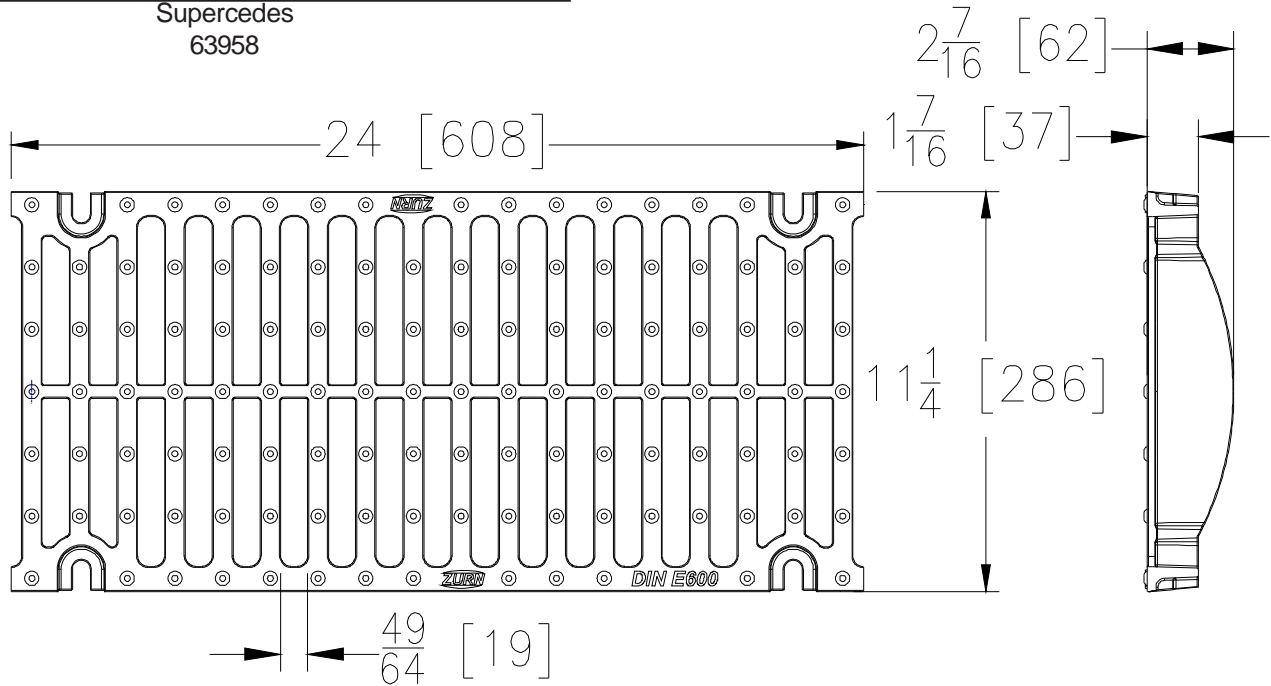

GDE-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-GDE-USA

Galvanized Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 19.5 lbs [9 kg] per linear foot. The grate has an open area of 60.3 in² [389 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.



GDE-USA-Galvanized Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	19.5 lbs/ft. [9 kg]
Open Area:	60.3 in ² /ft. [389 cm ²]
ANSI Rating:	Special-Duty
Application:	Hard Wheel & Truck
Slot Width/Hole Size:	49/64 [19]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-GDF

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	21	65868	P12-GDF

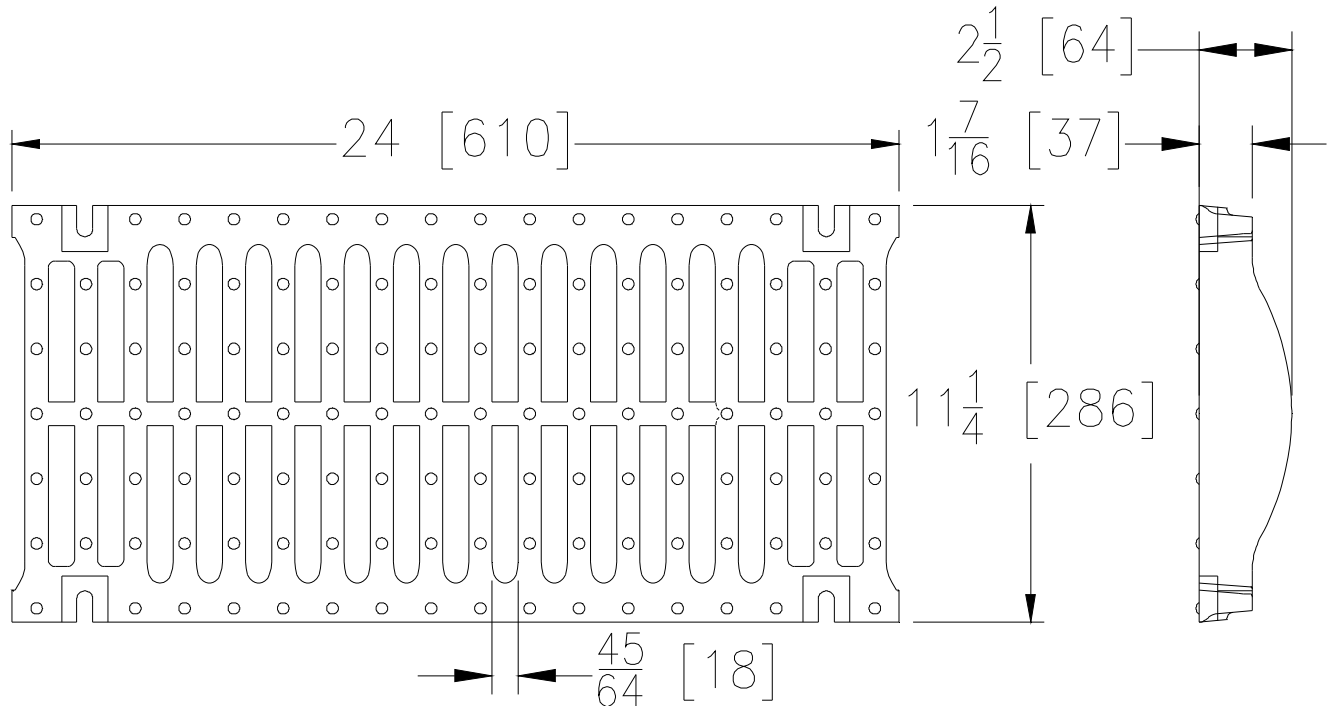

GDF GRATE ENGINEERING SPECIFICATION: The Zurn P12-GDF

Galvanized Ductile Iron Slotted Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 26 lbs [12 kg] per linear foot. The grate has an open area of 54 in² [348 cm²] per linear foot, DIN Rating of F, ANSI Rating of Special-Duty, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

GDF - Galvanized Ductile Iron	
Material:	Ductile Iron
DIN Rating:	Class F
Weight:	26 lbs/ft. [12 kg]
Open Area:	54 in ² /ft [348 cm ²]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	45/64 [18]
ADA:	No
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-GG

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	22	58553	P12-GG

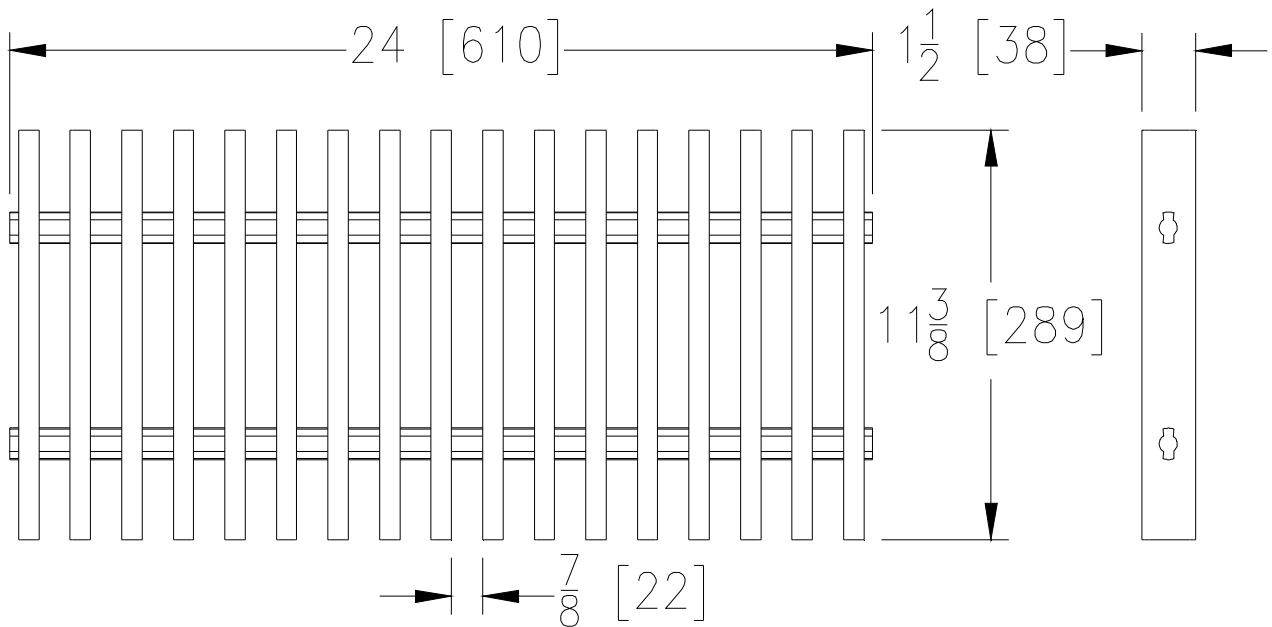

GG GRATE ENGINEERING SPECIFICATION: The Zurn P12-GG

Vinylester Fiberglass Slotted Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 2.8 lbs [1 kg] per linear foot. The grate has an open area of 82.5 in² [532 cm²] per linear foot, DIN Rating of A, ANSI Rating of Light-Duty and a slip resistant surface. Conforms to interplastic CORVE8300, or REICHHOLD DION 9100, or equivalent.

GG- Vinylester Fiberglass Slotted Grate	
Material:	Vinylester Fiberglass
DIN Rating:	Class A
Weight:	2.8 lbs/ft. [1 kg]
Open Area:	82.5 in ² /ft. [532 cm ²]
ANSI Rating:	Light-Duty
Application:	Chemical Resistance
Slot Width/Hole Size:	7/8 [22]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-GHPD

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	23	61015	P12-GHPD

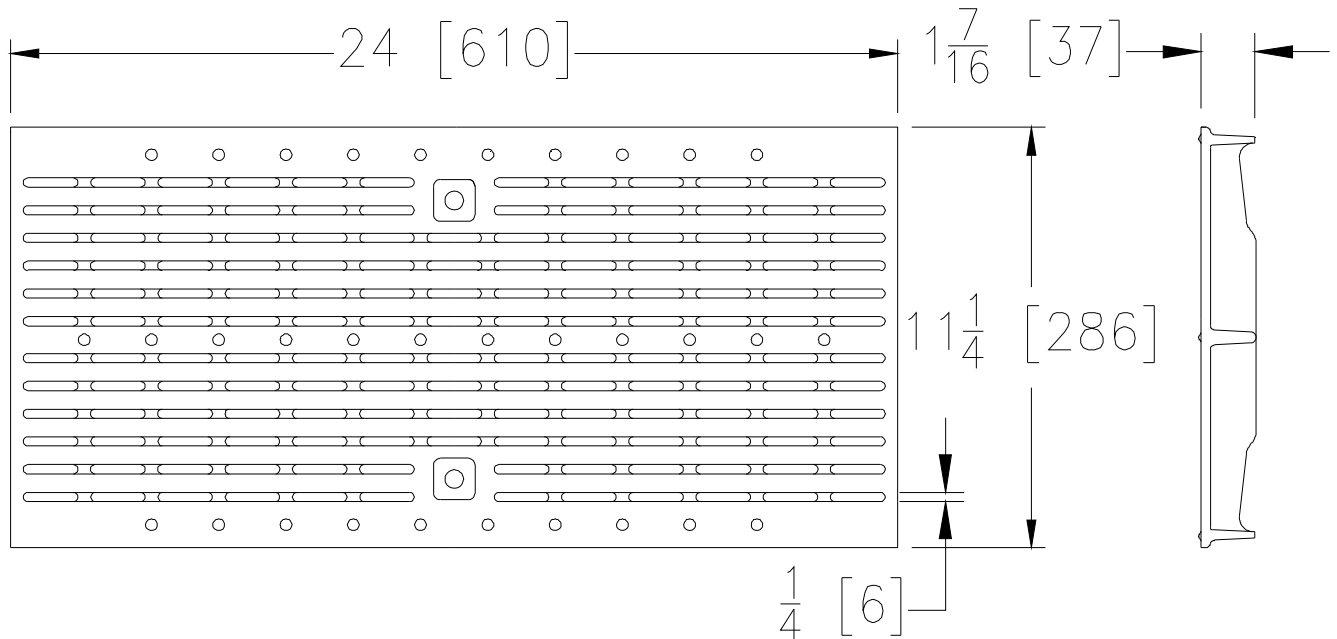

GHPD GRATE ENGINEERING SPECIFICATION: The Zurn P12-GHPD

Galvanized Ductile Iron Heel-Proof Longitudinal Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14 lbs [6 kg] per linear foot. The grate has an open area of 33.7 in² [217 cm²] per linear foot, DIN Rating of B, ANSI Rating of Medium-Duty, and ADA compliant. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

GHPD - Galvanized Heel-Proof	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	14 lbs/ft. [6 kg]
Open Area:	33.7 in ² /ft. [217 cm ²]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-GHPDE

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	24	94325	P12-GHPDE

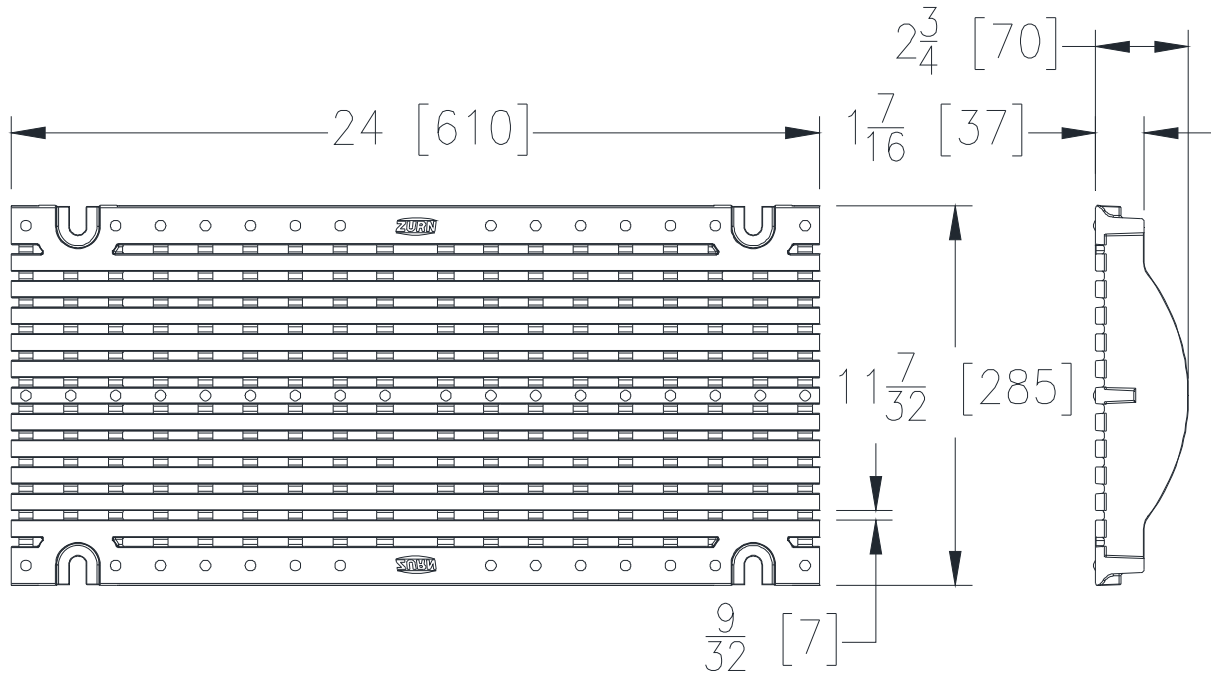

GHPDE GRATE ENGINEERING SPECIFICATION: The Zurn P12-GHPDE

Galvanized Ductile Iron Heel-Proof Longitudinal Grate, is 11-7/32 [284] wide X 24 [610] long, weighing 29.6 lbs [13 kg] per linear foot. The grate has an open area of 29.9 in² [193 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, ADA compliant, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.

GHPDE - Galvanized Heel-Proof	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	29.6 lbs/ft. [13 kg]
Open Area:	29.9 in ² /ft. [193 cm ²]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	9/32 [7]
ADA:	Yes
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-GHPDE-USA

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	25	94325	P12-GHPDE-USA

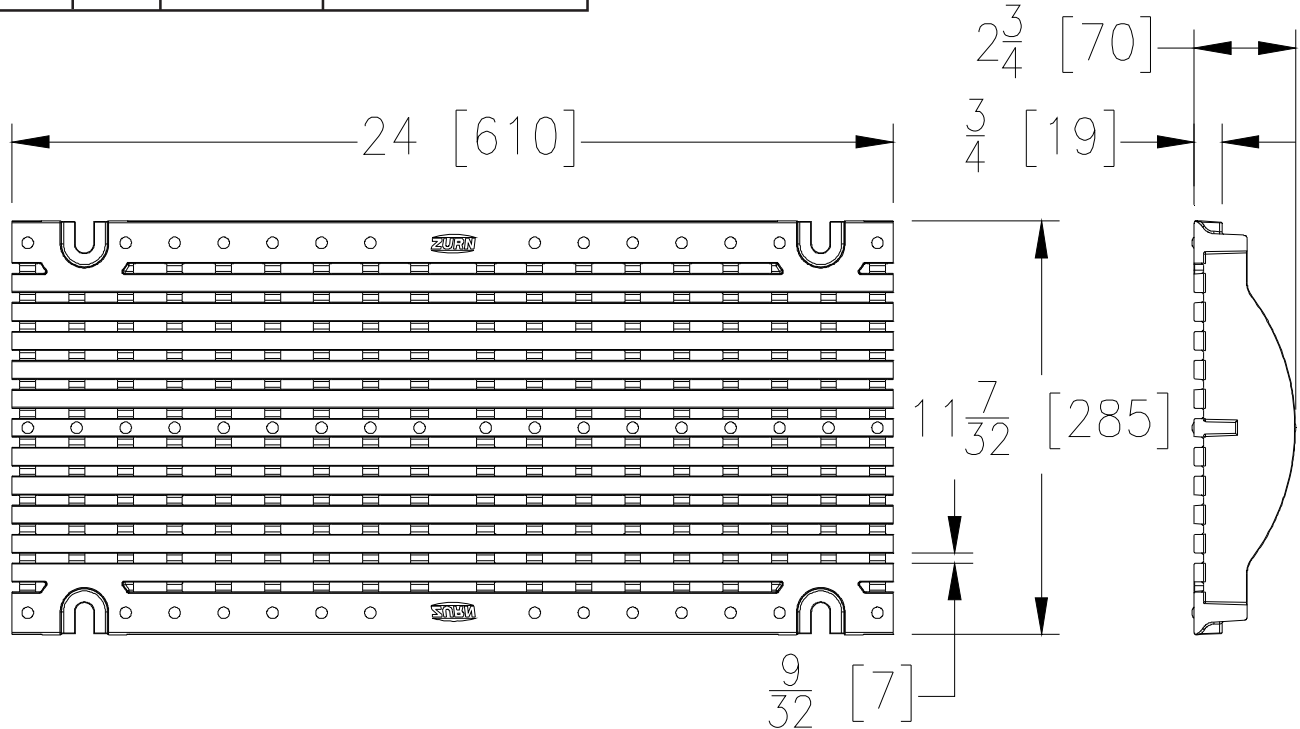

GHPDE-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-GHPDE-USA

Galvanized Ductile Iron Heel-Proof Longitudinal Grate, is 11-7/32 [284] wide X 24 [610] long, weighing 29.6 lbs [13 kg] per linear foot. The grate has an open area of 29.9 in² [193 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, ADA compliant, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanizing (hot dip) conforms to ASTM specification A123.



GHPDE-USA - Galvanized Heel-Proof	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	29.6 lbs/ft. [13 kg]
Open Area:	29.9 in ² /ft. [193 cm ²]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	9/32 [7]
ADA:	Yes
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-HPD

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	26	61015	P12-HPD

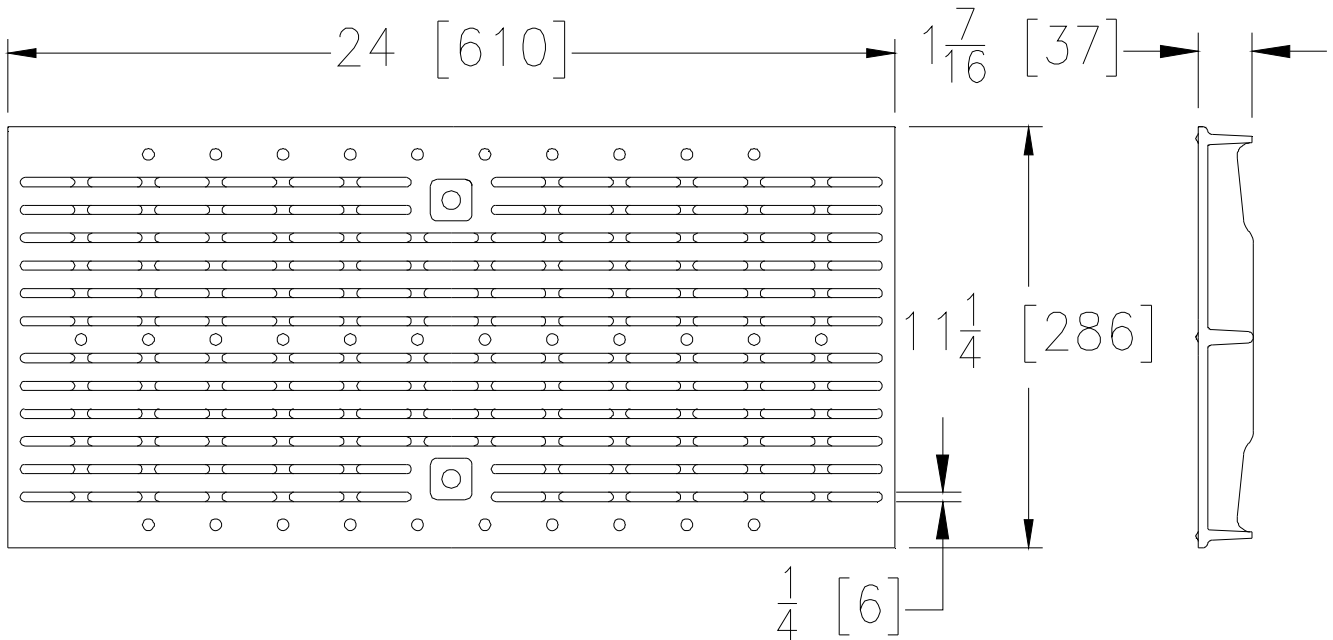

HPD GRATE ENGINEERING SPECIFICATION: The Zurn P12-HPD

Ductile Iron Heel-Proof Longitudinal Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 14 lbs [6 kg] per linear foot. The grate has an open area of 33.7 in² [217 cm²] per linear foot, DIN Rating of B, ANSI Rating of Medium-Duty, and ADA compliant. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

HPD - Heel-Proof	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	14 lbs/ft. [6 kg]
Open Area:	33.7 in ² /ft. [217 cm ²]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-HPDE 12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	27	94325	P12-HPDE

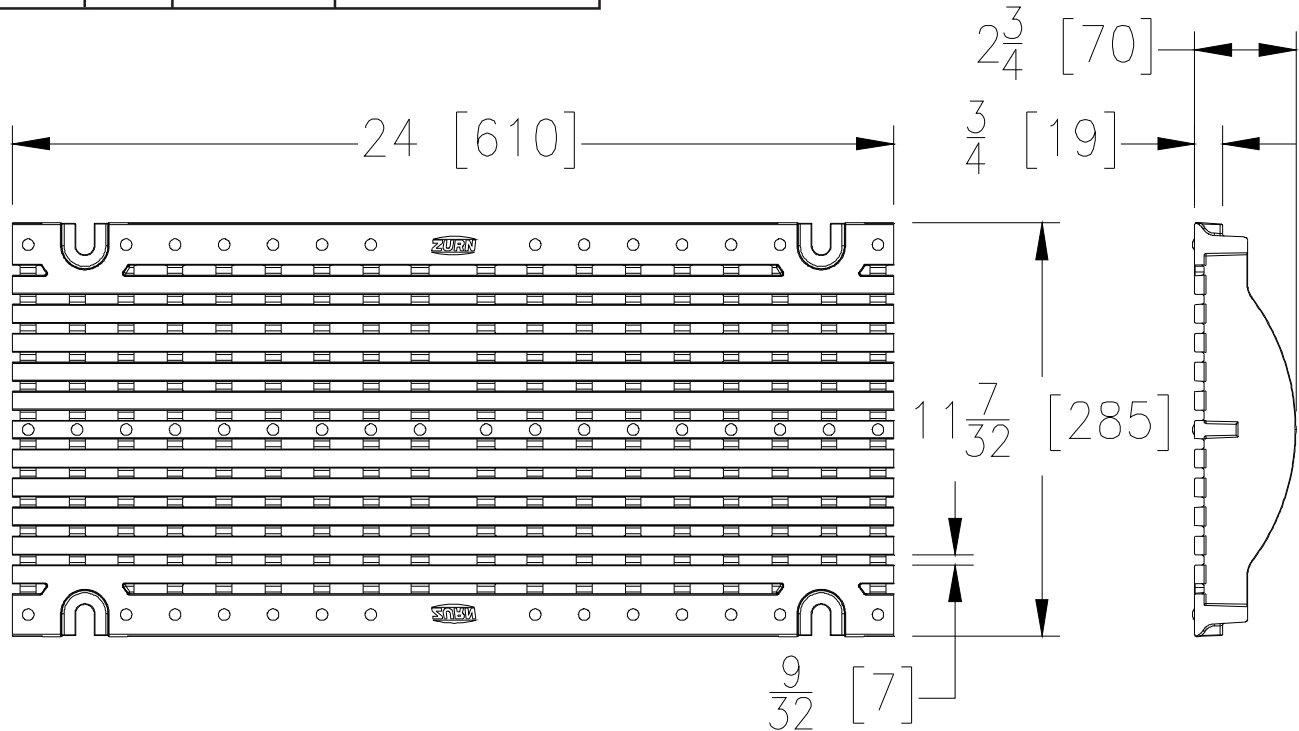

HPDE GRATE ENGINEERING SPECIFICATION: The Zurn P12-HPDE

Ductile Iron Heel-Proof Longitudinal Grate, is 11-7/32 [284] wide X 24 [610] long, weighing 29.6 lbs [13 kg] per linear foot. The grate has an open area of 29.9 in² [193 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, ADA compliant, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

HPDE - Heel-Proof	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	29.6 lbs/ft. [13 kg]
Open Area:	29.9 in ² /ft. [193 cm ²]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	9/32 [7]
ADA:	Yes
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-HPDE-USA

12 [305] Wide Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	28	94325	P12-HPDE-USA

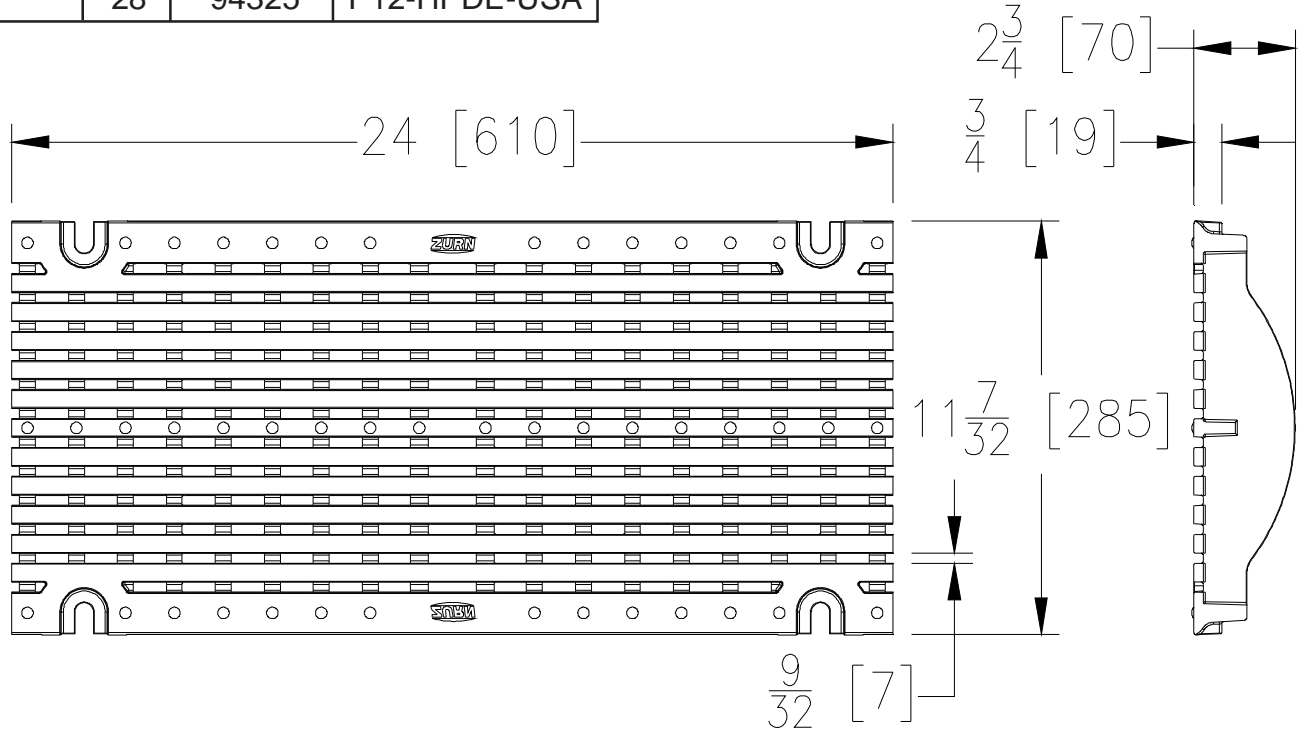

HPDE-USA GRATE ENGINEERING SPECIFICATION: The Zurn P12-HPDE-USA Ductile Iron Heel-Proof Longitudinal Grate, is 11-7/32 [284] wide X 24 [610] long, weighing 29.6 lbs [13 kg] per linear foot. The grate has an open area of 29.9 in² [193 cm²] per linear foot, DIN Rating of E, ANSI Rating of Special-Duty, ADA compliant, H-20 Load Rated, and FAA Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06.



HPDE-USA - Heel-Proof	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	29.6 lbs/ft. [13 kg]
Open Area:	29.9 in ² /ft. [193 cm ²]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	9/32 [7]
ADA:	Yes
H-20:	Yes
FAA:	Yes

* Regularly furnished unless otherwise specified.




P12-PG

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	29	60745	P12-PG

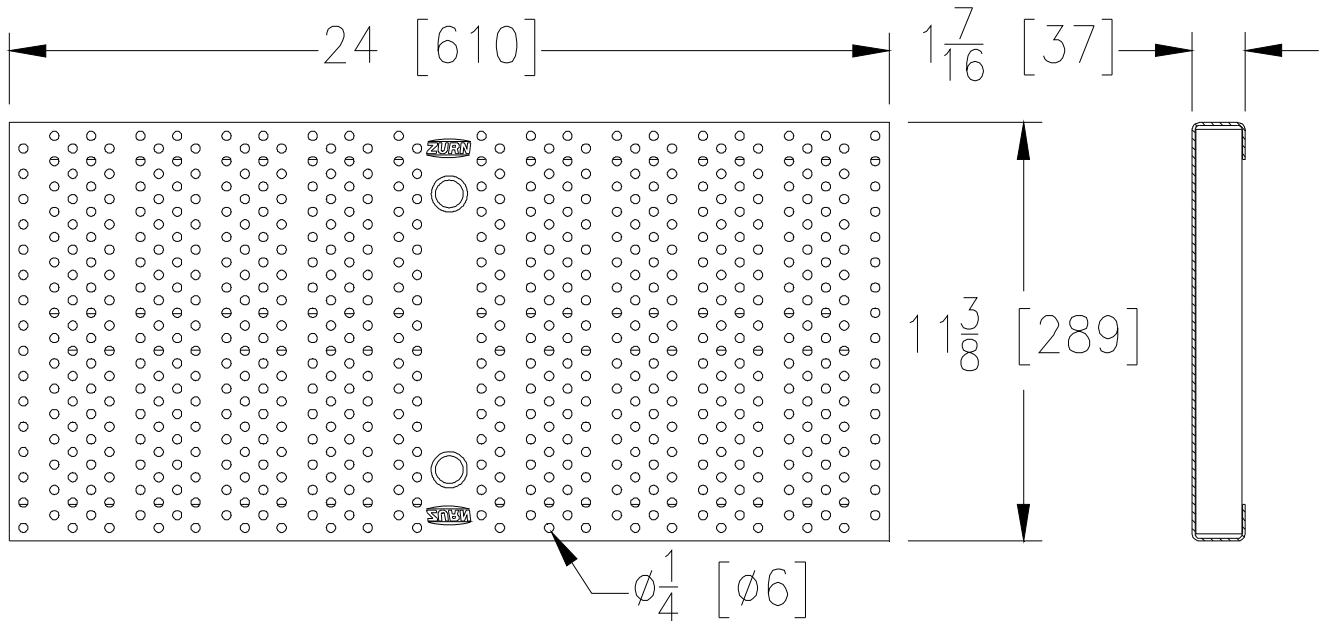

PG GRATE ENGINEERING SPECIFICATION: The Zurn P12-PG

Galvanized Perforated Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 7 lbs [3 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of A, ANSI Rating of Light-Duty, and ADA Compliant. Carbon Steel conforms to ASTM A36. Galvanized Sheet conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle.



PG - Perforated Galvanized	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	7 lbs/ft. [3 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Light-Duty
Application:	Heel-Proof & Pedestrian
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-PGR

12 [305] Wide Galvanized Steel Raised Perforated Anti-Slip ADA Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	30	300572	P12-PGR

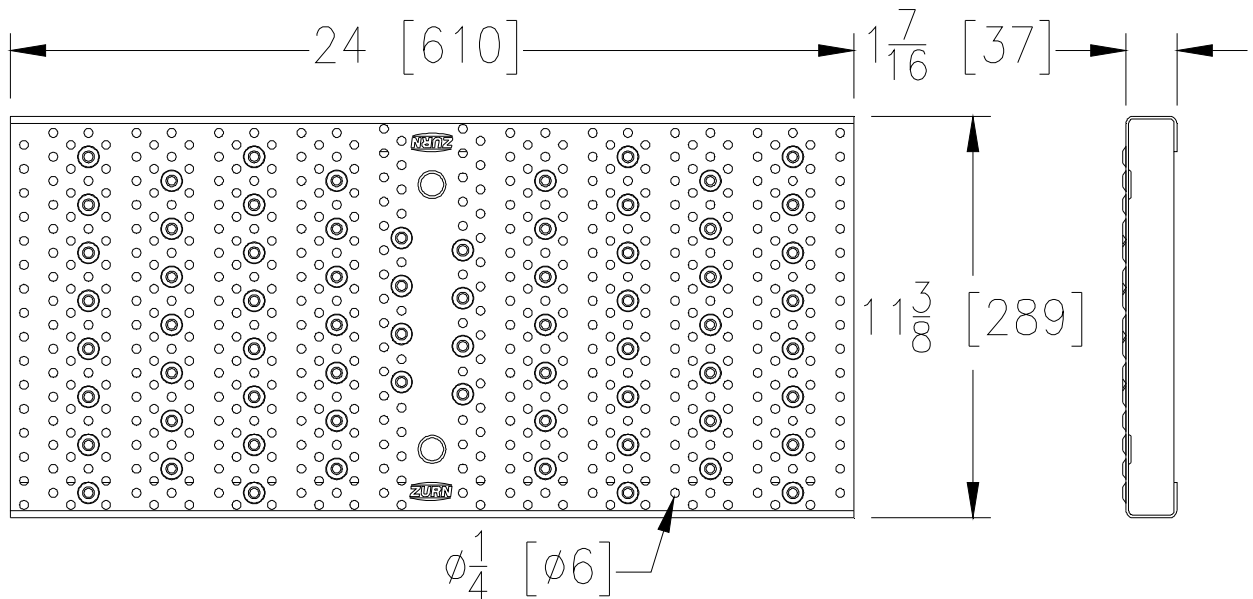

PGR GRATE ENGINEERING SPECIFICATION: The Zurn P12-PGR

Galvanized Steel Raised Perforated Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 7 lbs [3 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of A, ANSI Rating of Light-Duty, and ADA Compliant. Galvanized steel conforms to ASTM A36. Galvanized Sheet conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle.



PGR - Raised Perforated	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	7.0 lbs/ft. [3 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Light-Duty
Application:	Heel-Proof & Pedestrian
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-PS

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	31	60745	P12-PS

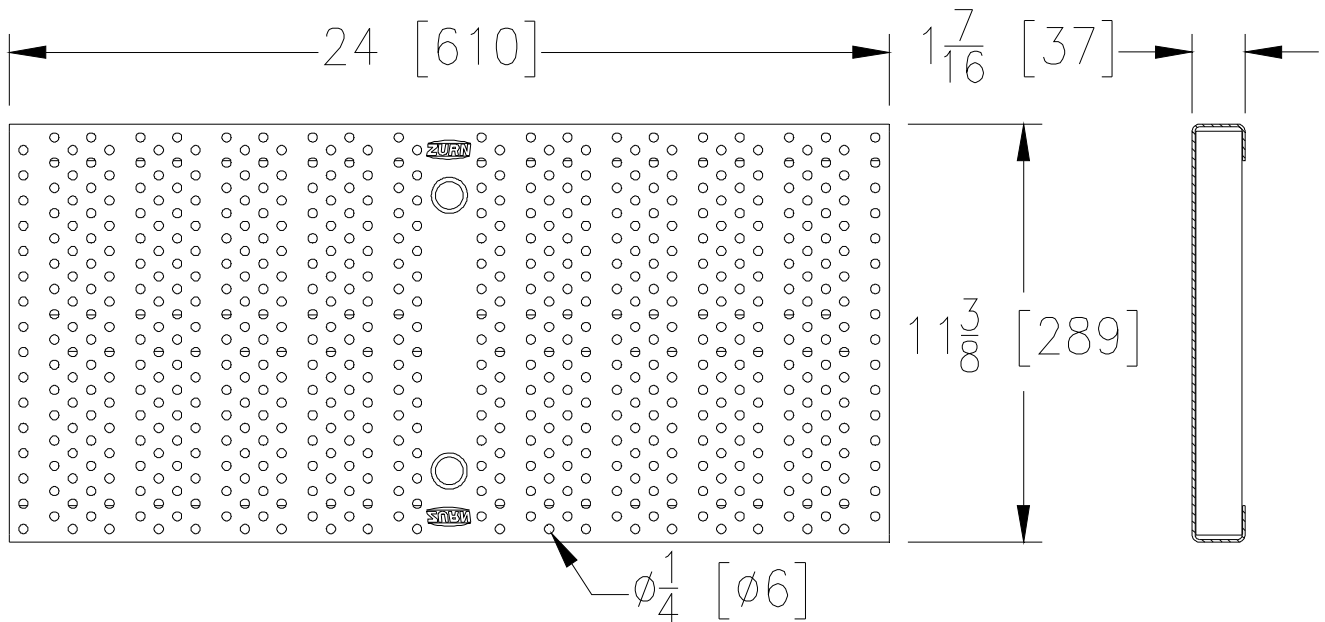

PS GRATE ENGINEERING SPECIFICATION: The Zurn P12-PS

Perforated Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 7.3 lbs [3 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of A, ANSI Rating of Light-Duty, and ADA Compliant. Stainless Steel conforms to ASTM A240 Grade CF8 Type 304 (Type 316 by request).



PS - Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	7.3 lbs/ft. [3 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Light-Duty
Application:	Heel-Proof & Pedestrian
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-PSR

12 [305] Wide Stainless Steel Raised Perforated Anti-Slip ADA Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	32	300572	P12-PSR

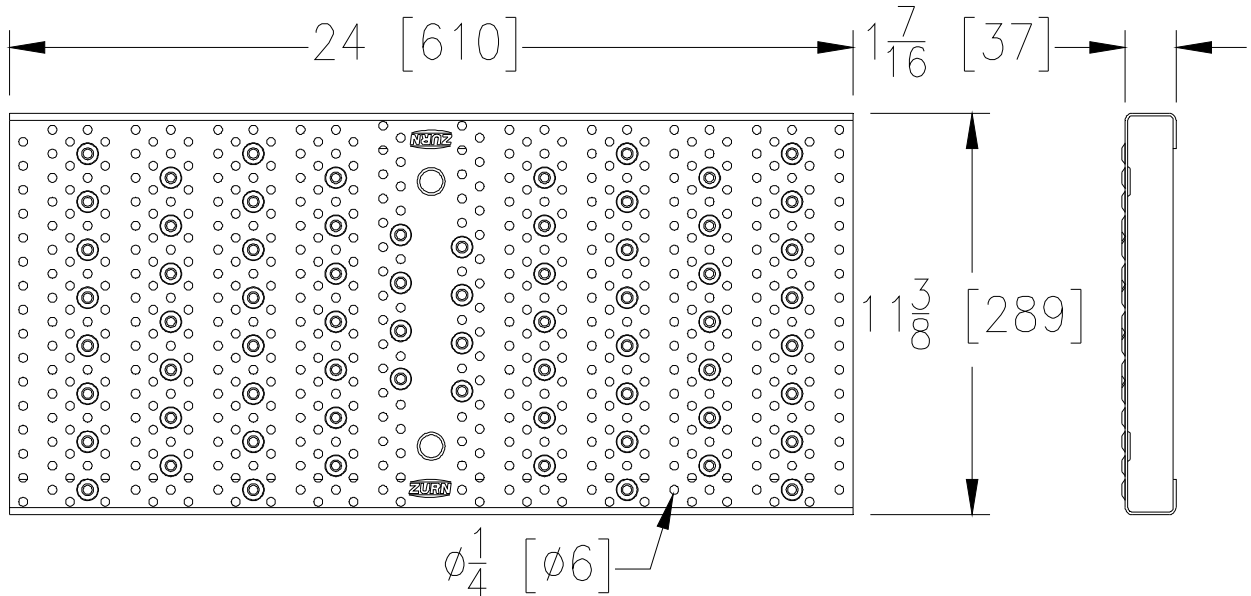

PSR GRATE ENGINEERING SPECIFICATION: The Zurn P12-PSR

Stainless Steel Raised Perforated Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 7.3 lbs [3 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of A, ANSI Rating of Light-Duty, and ADA Compliant. Stainless Steel conforms to ASTM A240 Grade CF8 Type 304 (316 by request).



PSR - Raised Perforated	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	7.3 lbs/ft. [3 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Light-Duty
Application:	Heel-Proof & Pedestrian
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RFG

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	33	61019	P12-RFG

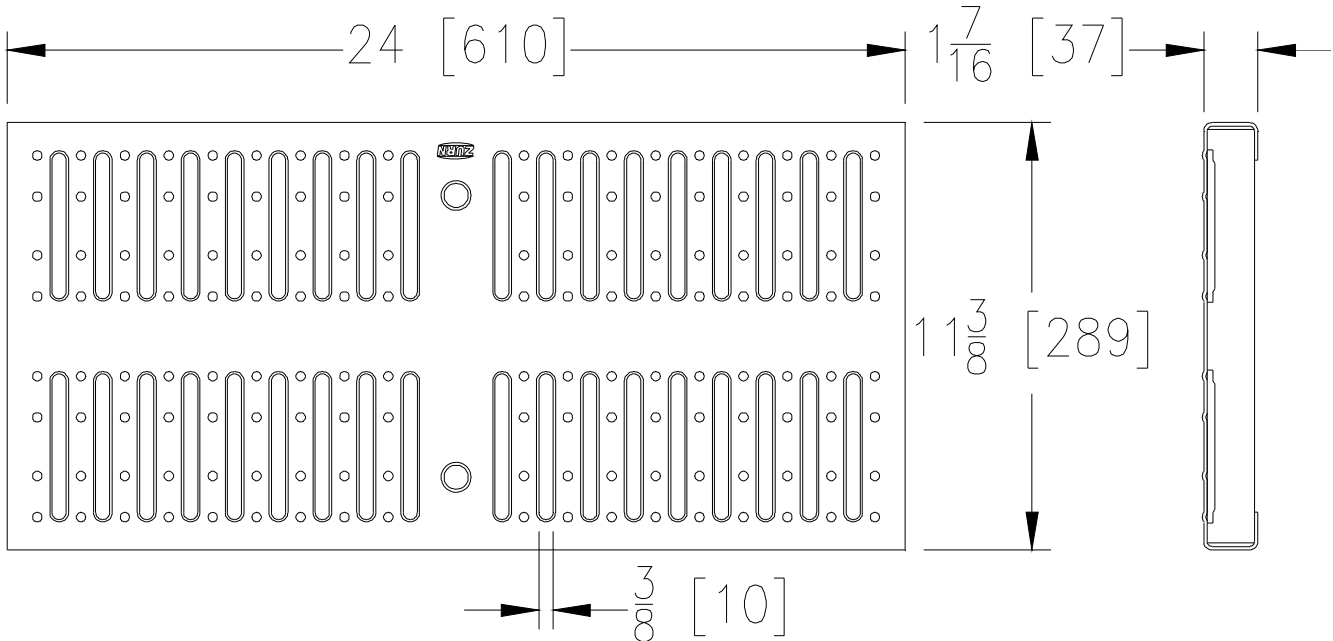

RFG GRATE ENGINEERING SPECIFICATION: The Zurn P12-RFG

Reinforced Galvanized Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 10.6 lbs [5 kg] per linear foot. The grate has an open area of 25.6 in² [165 cm²] per linear foot, DIN Rating of B, and ANSI Rating of Medium-Duty. Galvanized Steel conforms to ASTM A36. Galvanized Skin conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle.



RFG - Reinforced Galvanized	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	10.6 lbs/ft. [5 kg]
Open Area:	25.6 in ² /ft. [165 cm ²]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	3/8 [10]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RFGC

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	34	302789	P12-RFGC

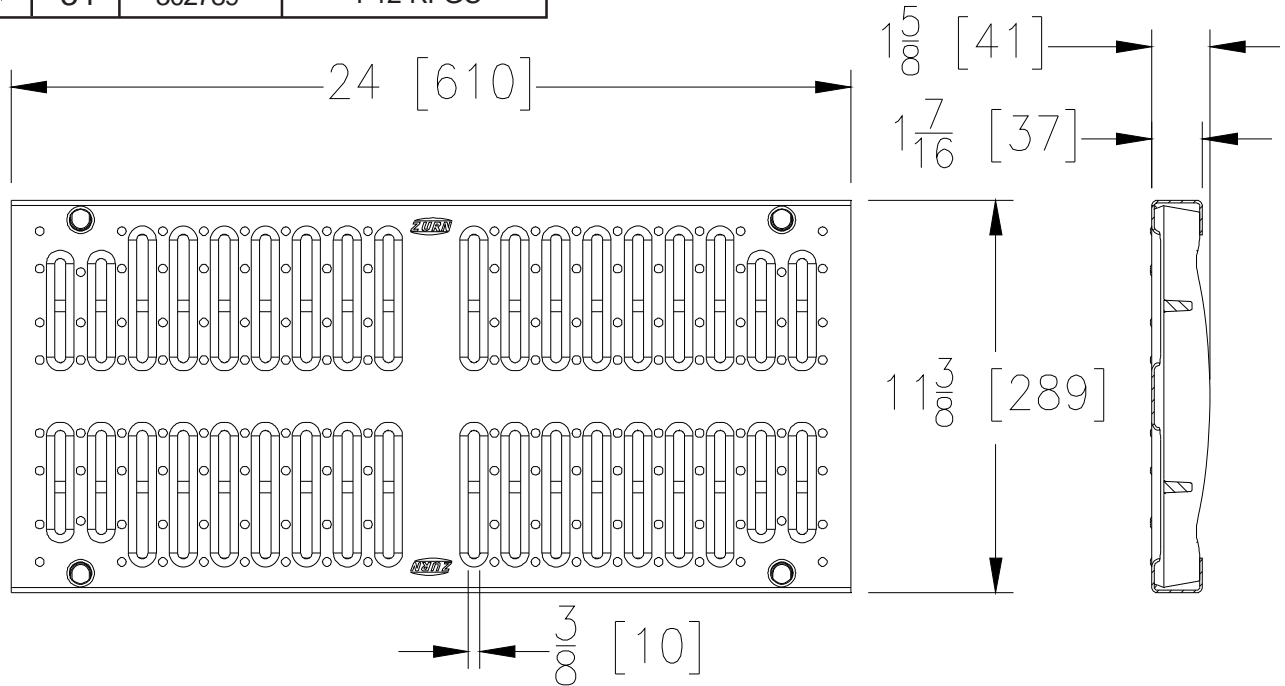

RFGC GRATE ENGINEERING SPECIFICATION: The Zurn P12-RFGC

Reinforced Galvanized Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 16.4 lbs [7 kg] per linear foot. The grate has an open area of 20.2 in² [130 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Galvanized Skins conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle. Hot Dip Galvanized on Reinforcement conforms to ASTM Specification A123. Ductile Iron conforms to ASTM A536 Grade 80-55-06.

RFGC - Reinforced Galvanized	
Material: Galvanized Steel & Galvanized Ductile Iron	
DIN Rating:	Class C
Weight:	16.4 lbs/ft. [7 kg]
Open Area:	20.2 in ² /ft. [130 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	3/8 [10]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RFS

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	35	61019	P12-RFS

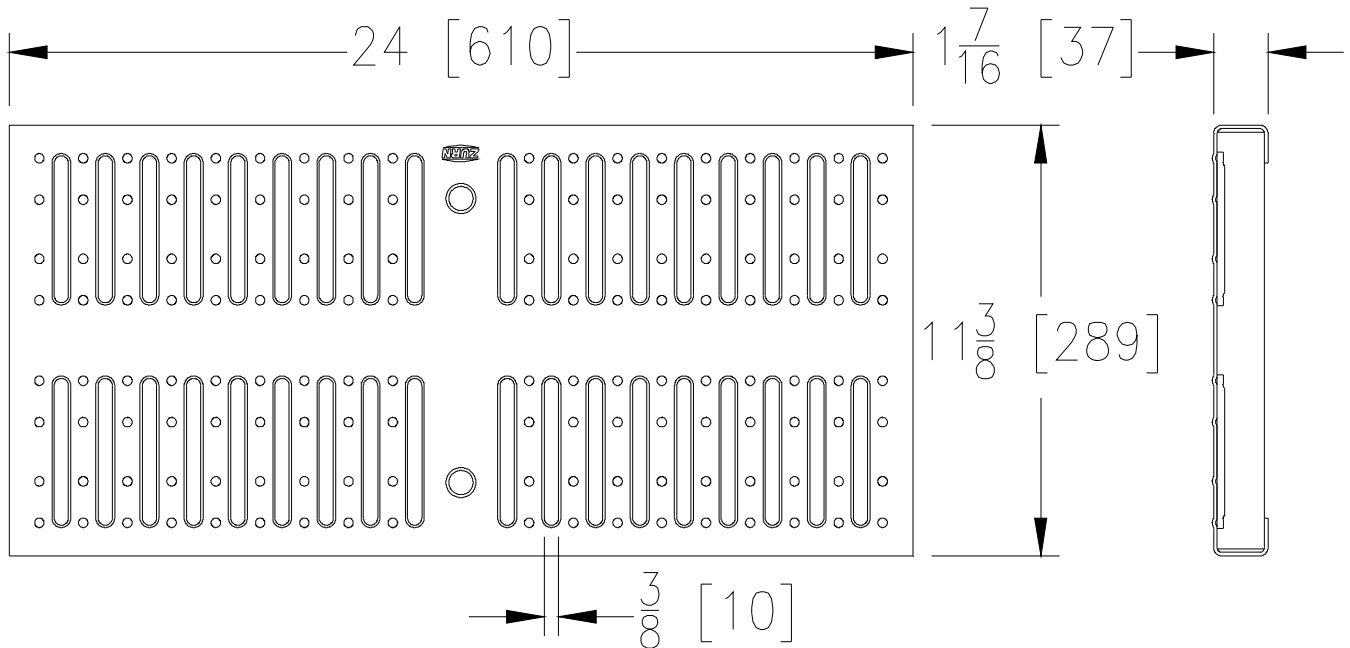

RFS GRATE ENGINEERING SPECIFICATION: The Zurn P12-RFS

Reinforced Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 12.2 lbs [6 kg] per linear foot. The grate has an open area of 25.6 in² [165 cm²] per linear foot, DIN Rating of B, and ANSI Rating of Medium-Duty. Stainless Steel conforms to ASTM A240 Type 304 (or 316 by request).



RFS - Reinforced Slotted	
Material:	Type 304 Stainless Steel
DIN Rating:	Class B
Weight:	12.2 lbs/ft. [6 kg]
Open Area:	25.6 in ² /ft. [165 cm ²]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	3/8 [10]
ADA:	No
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RFSC

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	36	302814	P12-RFSC

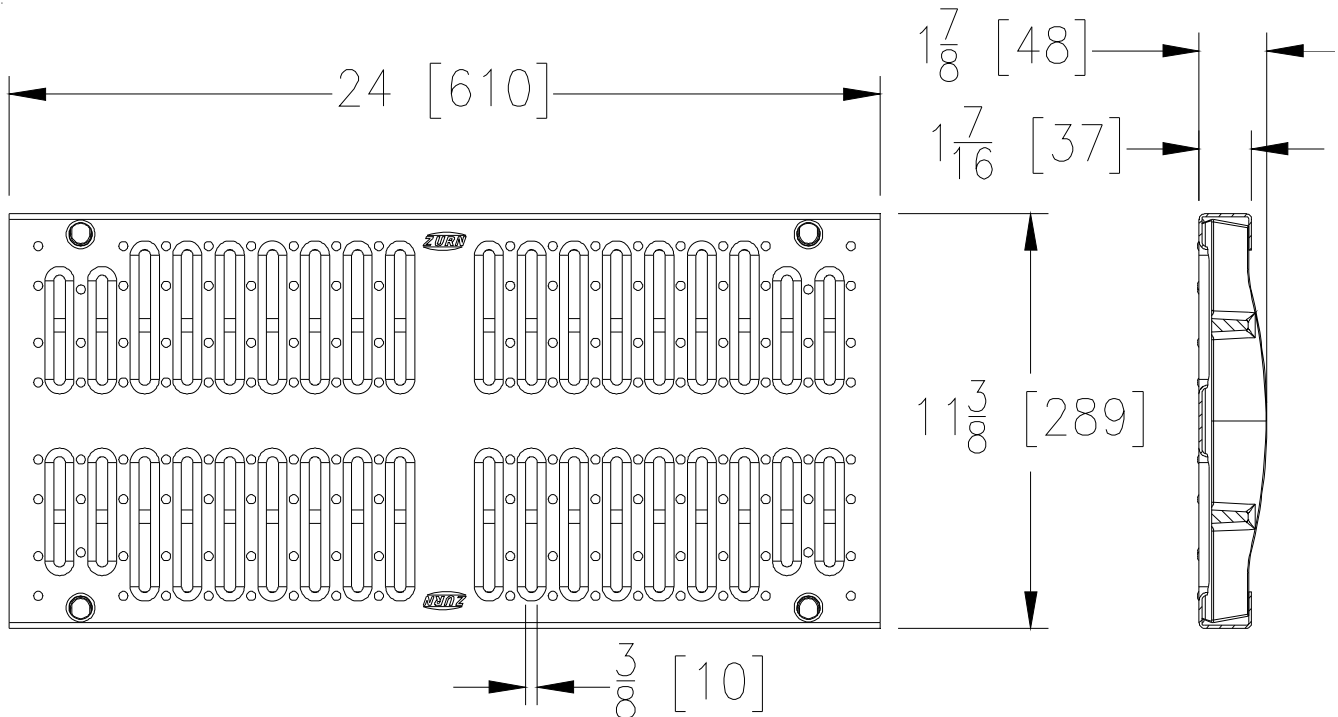

RFSC GRATE ENGINEERING SPECIFICATION: The Zurn P12-RFSC

Reinforced Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 21.3 lbs [10 kg] per linear foot. The grate has an open area of 20.2 in² [130 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, and H-20 Load Rated. Stainless Steel Reinforcement conforms to ASTM A315 Grade CF8 Type 304 (or CF8M Type 316 by request). Stainless Steel skins conform to ASTM A240 Type 304 (or 316 by request).

RFSC - Reinforced Slotted	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	21.3 lbs/ft. [10 kg]
Open Area:	20.2 in ² /ft. [130 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	3/8 [10]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPG

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	37	60745	P12-RPG

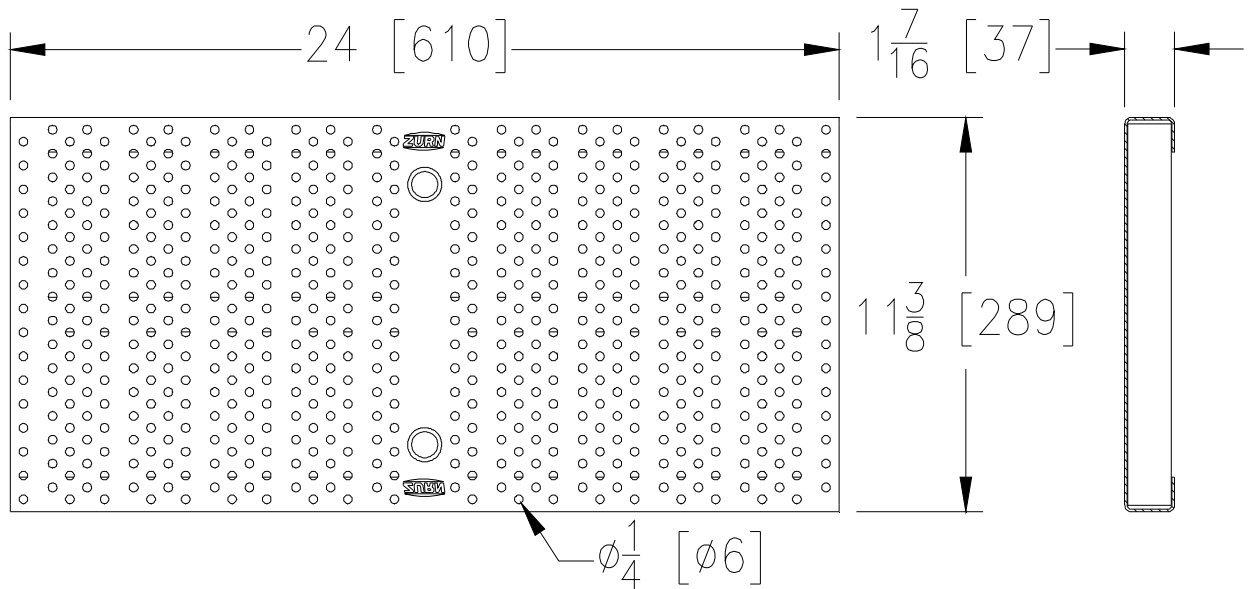

RPG GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPG

Reinforced Galvanized Perforated Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 11.3 lbs [5 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of B, ANSI Rating of Medium-Duty, and ADA Compliant. Carbon Steel conforms to ASTM A36. Galvanized Skin conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle. Galvanizing (hot dip) conforms to ASTM A123.



RPG - Reinforced Perforated	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	11.3 lbs/ft. [5 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPGC

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	38	302813	P12-RPGC

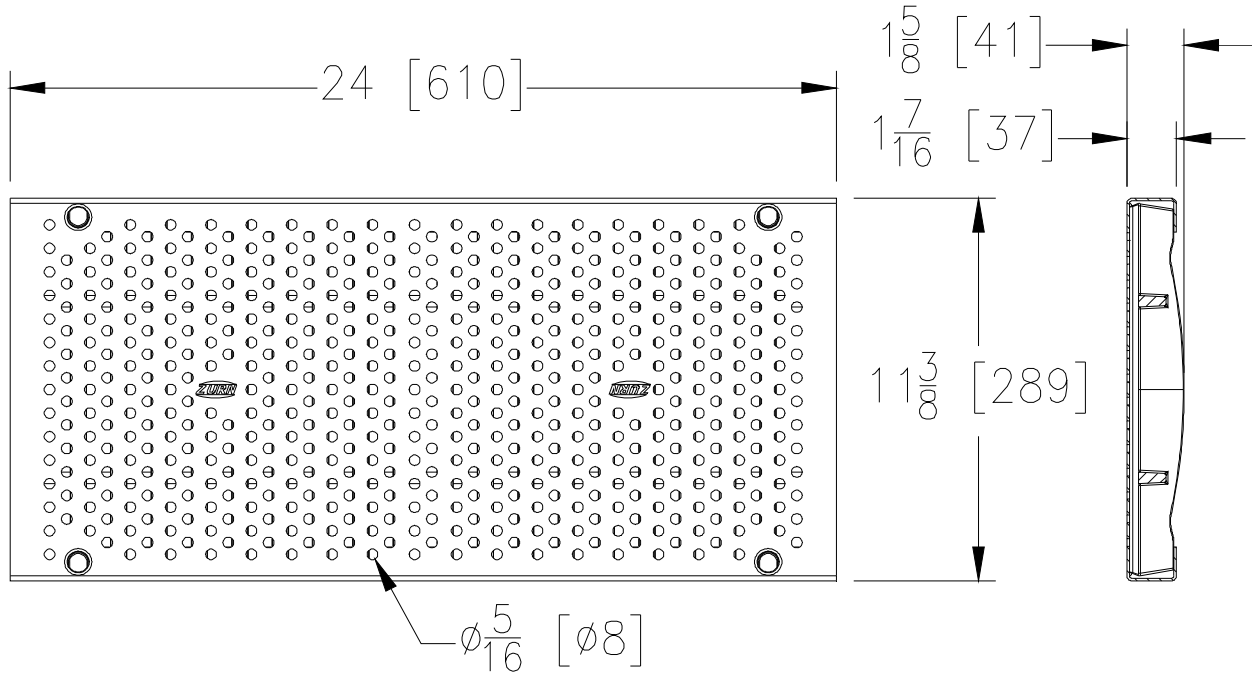

RPGC GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPGC

Reinforced Galvanized Perforated Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 16.0 lbs [7 kg] per linear foot. The grate has an open area of 19.2 in² [124 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, ADA Compliant, and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanized Sheet conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle. Galvanizing (Hot Dip) conforms to ASTM Specification A123.

RPGC - Reinforced Perforated	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	16.0 lbs/ft. [7 kg]
Open Area:	19.2 in ² /ft. [124 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPGR

12 [305] Wide Galvanized Steel Reinforced Raised Perforated Anti-Slip ADA Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	39	300572	P12-RPGR

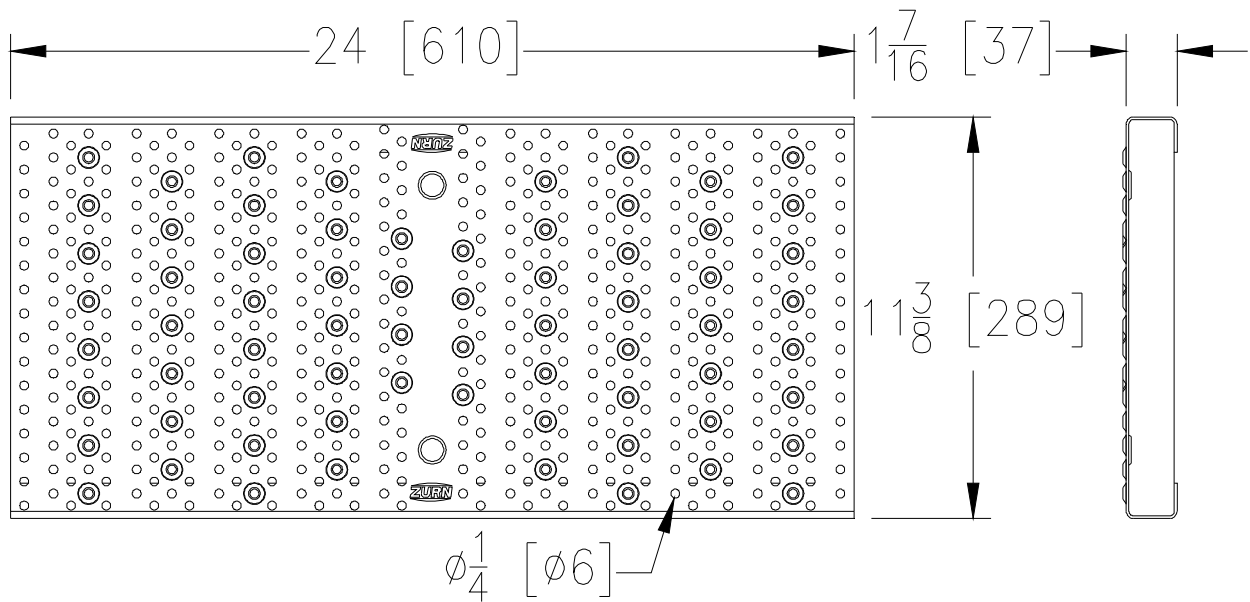

RPGR GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPGR

Galvanized Steel Reinforced Raised Perforated Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 11.3 lbs [5 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of Class B, ANSI Rating of Medium-Duty, and ADA Compliant. Carbon Steel conforms to ASTM A36. Galvanized Skin conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle. Galvanizing (hot dip) conforms to ASTM A123.



RPGR - Raised Perforated	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	11.3 lbs/ft. [5 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPGRC

12 [305] Wide Galvanized Steel Reinforced Raised Perforated Anti-Slip ADA Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	40	305024	P12-RPGRC

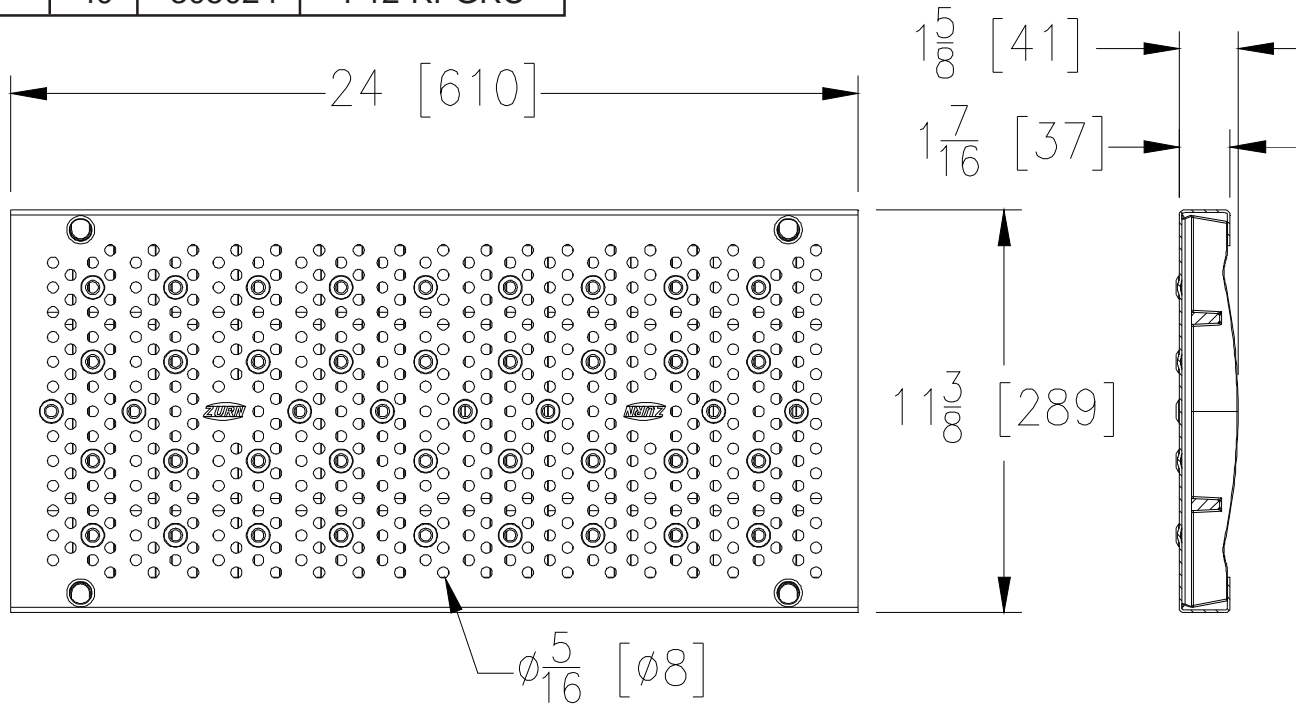

RPGRC GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPGRC

Galvanized Steel Reinforced Raised Perforated Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 16.0 lbs [7 kg] per linear foot. The grate has an open area of 19.2 in² [124 cm²] per linear foot, DIN Rating of Class C, ANSI Rating of Heavy-Duty, ADA Compliant and H-20 Load Rated. Ductile Iron conforms to ASTM A536 Grade 80-55-06. Galvanized Sheet conforms to ASTM Specification A653, Galvanized Coating designation G60, minimum spangle. Galvanizing (Hot Dip) conforms to ASTM A123.

RPGRC - Raised Perforated	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	16.0 lbs/ft. [7 kg]
Open Area:	19.2 in ² /ft. [124 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPS

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	41	60745	P12-RPS

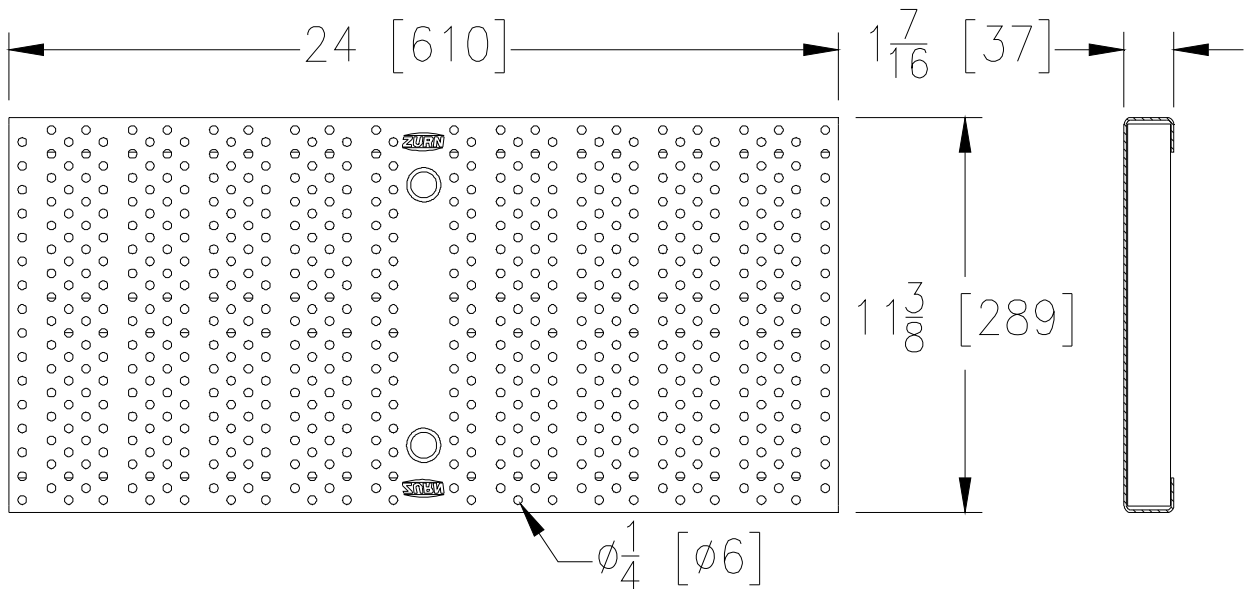

RPS GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPS

Reinforced Perforated Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 11.6 lbs [5 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of B, ANSI Rating of Medium-Duty, and ADA Compliant. Stainless Steel conforms to ASTM A240 Grade CF8 Type 304 (316 by request).



RPS - Reinforced Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class B
Weight:	11.6 lbs/ft. [5 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPSC

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	42	302785	P12-RPSC

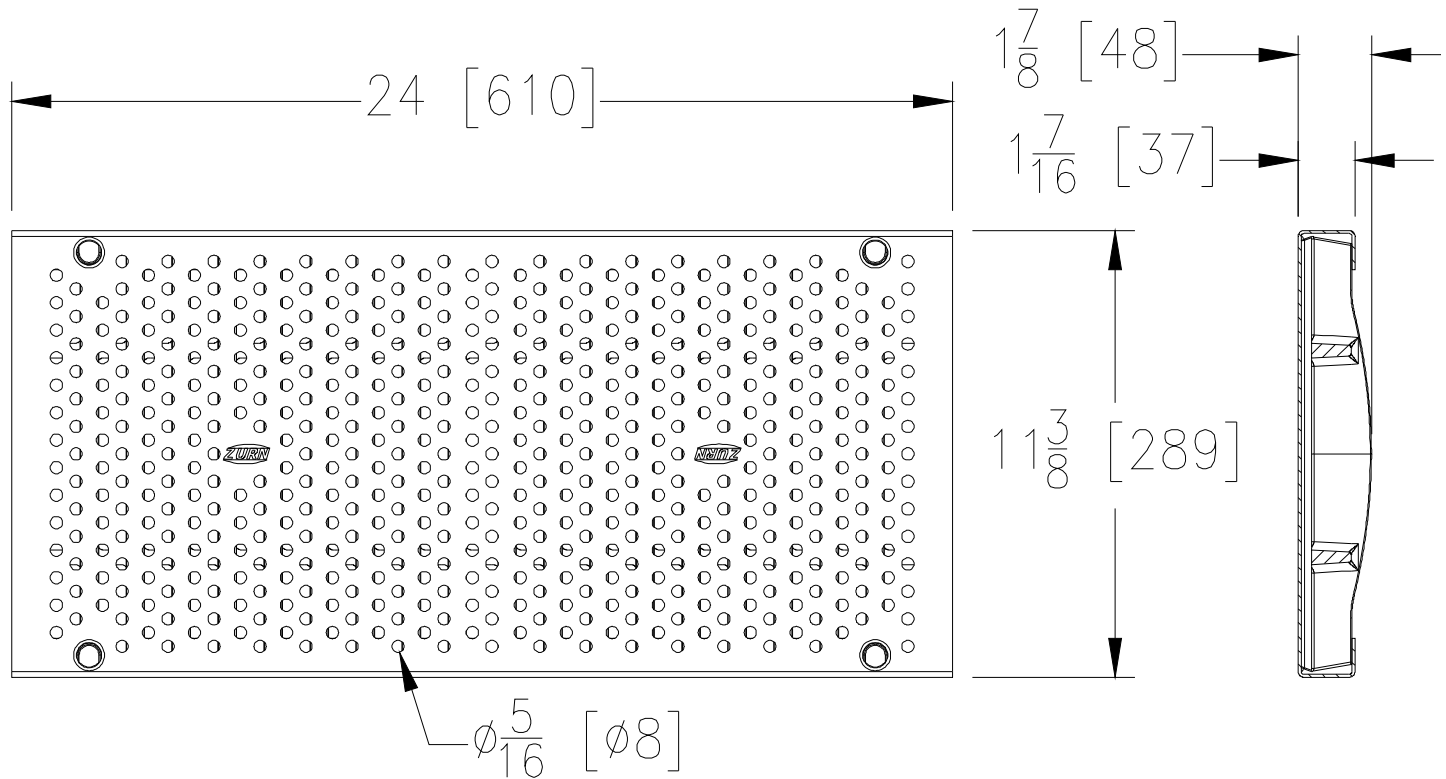

RPSC GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPSC

Reinforced Perforated Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 21.0 lbs [10 kg] per linear foot. The grate has an open area of 19.2 in² [124 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, ADA Compliant, and H-20 Load Rated. Stainless Steel conforms to ASTM A240 Grade CF8 Type 304 (or 316 by request).

RPSC - Reinforced Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	21.0 lbs/ft. [10 kg]
Open Area:	19.2 in ² /ft. [124 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPSR

12 [305] Wide Stainless Steel Reinforced Raised Perforated Anti-Slip ADA Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	43	300572	P12-RPSR

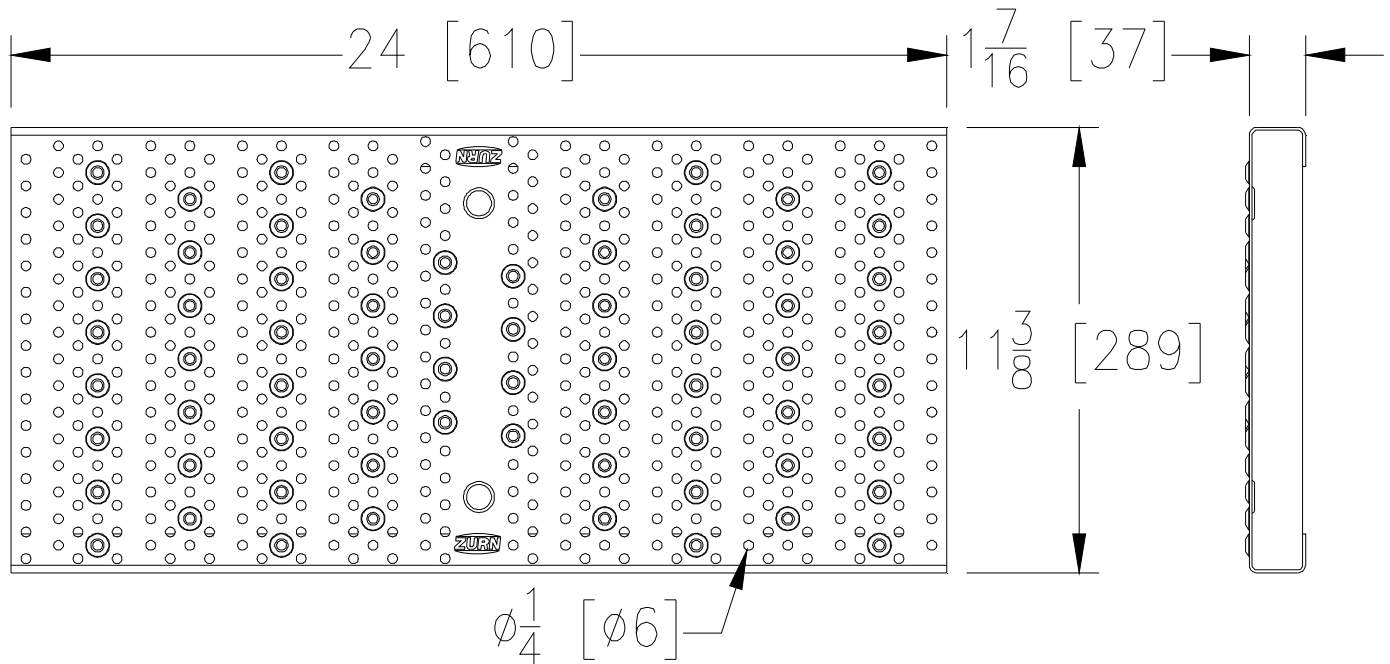

RPSR GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPSR

Stainless Steel Reinforced Raised Perforated Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 11.6 lbs [5 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of Class B, ANSI Rating of Medium-Duty, and ADA Compliant. Stainless Steel conforms to ASTM A240 Grade CF8 Type 304 (or 316 by request).



RPSR - Raised Perforated	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	11.6 lbs/ft. [5 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	1/4 [6]
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.




P12-RPSRC

12 [305] Wide Stainless Steel Reinforced Raised Perforated Anti-Slip ADA Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	44	305025	P12-RPSRC

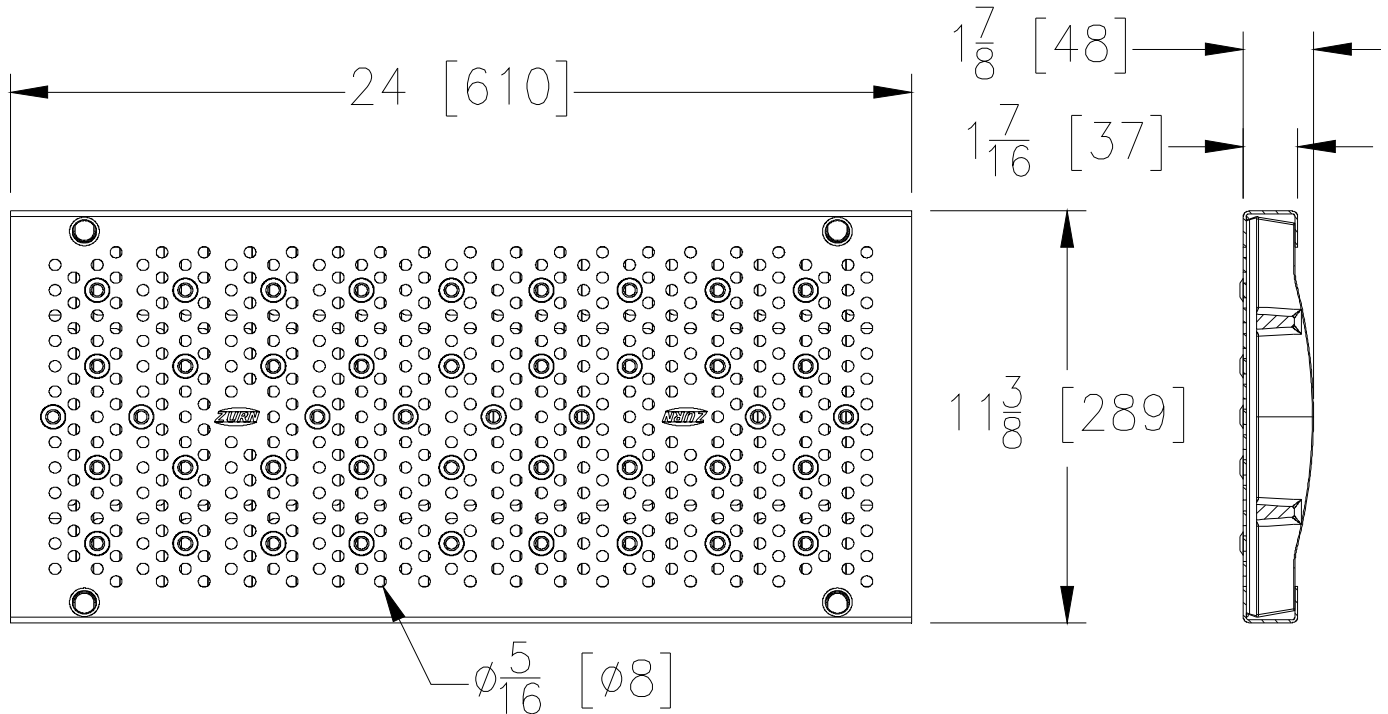

RPSRC GRATE ENGINEERING SPECIFICATION: The Zurn P12-RPSRC

Stainless Steel Reinforced Raised Perforated Grate, is 11-3/8 [289] wide X 24 [610] long, weighing 21.0 lbs [10 kg] per linear foot. The grate has an open area of 14.9 in² [96 cm²] per linear foot, DIN Rating of Class C, ANSI Rating of Heavy-Duty, ADA Compliant, and H-20 Load Rated. Stainless Steel conforms to ASTM A351 Grade CF8 Type 304 (or Grade CF8M Type 316 by request). Stainless Steel skins conforms to ASTM A240 Type 304 (or 316 by request).

RPSRC - Raised Perforated	
Material:	Stainless Steel
DIN Rating:	Class C
Weight:	21.0 lbs/ft. [10 kg]
Open Area:	14.9 in ² /ft. [96 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-SBG-L

12 [305] Wide Domestic Grate

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	45	94015	P12-SBG-L

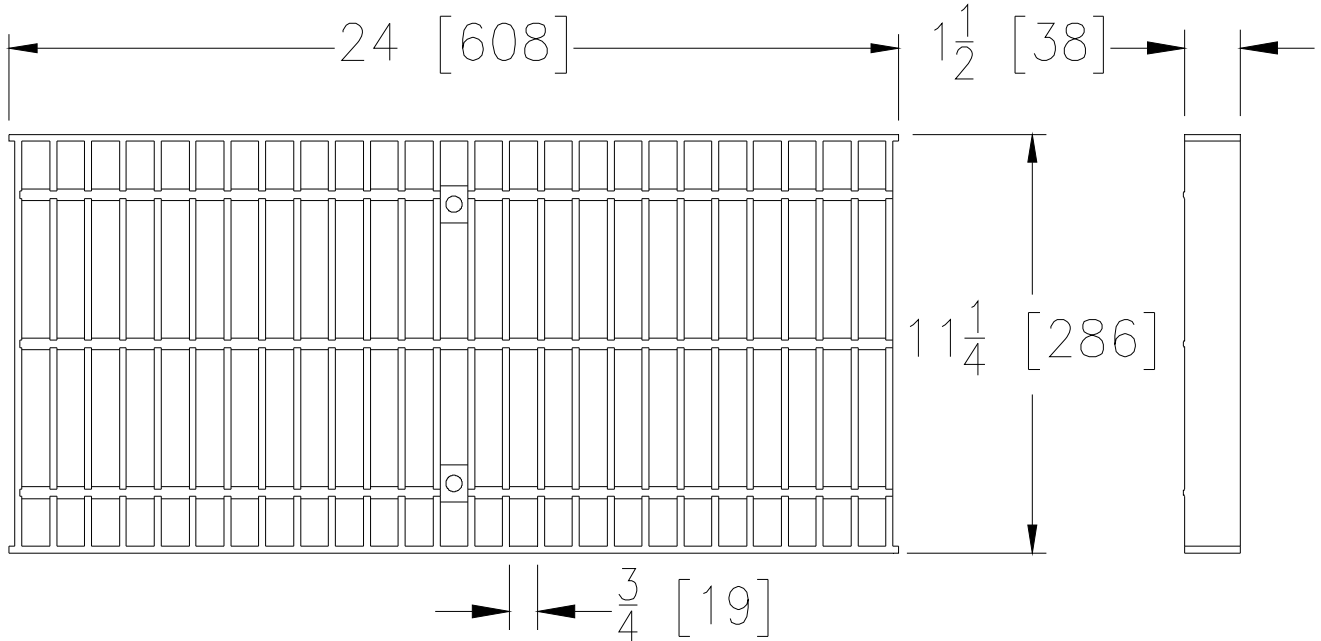

SBG-L GRATE ENGINEERING SPECIFICATION: The Zurn P12-SBG-L

Stainless Steel Slotted Bar Grate, is 11-1/4 [286] wide X 24 [610] long, weighing 13.9 lbs [6 kg] per linear foot. The grate has an open area of 101.9 in² [657 cm²] per linear foot, DIN Rating of C, ANSI Rating of Heavy-Duty, H-20 Load Rated. Stainless Steel conforms to ASTM A240 Grade CF8 Type 304 (or 316 by request).



SBG-L - Steel Bar	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	13.9 lbs/ft. [6 kg]
Open Area:	101.9 in ² /ft. [657 cm ²]
ANSI Rating:	Heavy-Duty
Application:	Vehicle & Truck
Slot Width/Hole Size:	3/4 [19]
ADA:	No
H-20:	Yes
FAA:	No

* Regularly furnished unless otherwise specified.




P12-SSCD

12 [305] Wide Cover

Dimensional data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), area (in²[cm²], and weight (lbs[kg])

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	46	60745	P12-SSCD

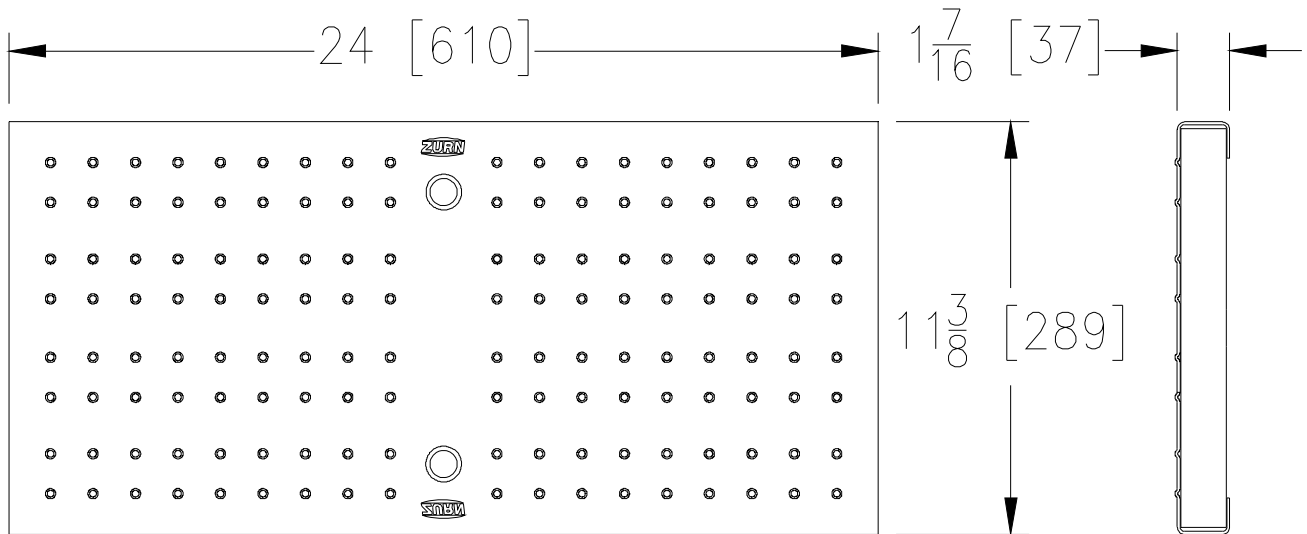

SSCD COVER ENGINEERING SPECIFICATION: The Zurn P12-SSCD

Reinforced Solid Cover, Stainless Steel, is 11-3/8 [289] wide X 24 [610] long, weighing 11.7 lbs [5 kg] per linear foot. The cover has a DIN Rating of B, ANSI Rating of Medium-Duty and is ADA Compliant. Stainless Steel conforms to ASTM A351 Grade CF8 (Type 304).



SSCD - Stainless Steel Cover	
Material:	Type 304 Stainless Steel
DIN Rating:	Class B
Weight:	11.7 lbs/ft. [5 kg]
Open Area:	N/A
ANSI Rating:	Medium-Duty
Application:	Light Vehicle
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	No
FAA:	No

* Regularly furnished unless otherwise specified.