



# Z826F1-XL

Laboratory Faucet - Double

TAG \_\_\_\_\_

### Architectural/Engineering Specification:

Polished chrome-plated double laboratory faucet with integral shank, quarter turn ceramic disc cartridges and a 6" [152mm] cast brass swing spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 2-1/2" [64mm] vandal-resistant color-coded metal lever handles, mounting hardware and stainless steel flex connection hoses.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

### Product Features:

- Quarter Turn Ceramic Disc Cartridge
- Cast Brass Body
- Vandal-Resistant Color-Coded Metal Lever Handles
- Stainless Steel Flex Connection Hoses

### Compliance and Certification:

- Low-Lead Compliant
- ADA Compliant



### Aerator Options:

	Flow rate GPM [LpM]	Vandal Resistant	Pressure Compression	Outlet Type
<b>-2F</b>	2.2[8.3]	✓	✓	Aerator
<b>-3F</b>	0.5[1.9]	✓	✓	Spray
<b>-4F</b>	2.2[8.3]	✓	✓	Laminar
<b>-7F</b>	1.0[3.8]		✓	Spray
<b>-16F</b>	1.0[3.8]	✓	✓	Spray
<b>-17F</b>	1.5[5.7]	✓	✓	Aerator
<b>-18F</b>	1.5[5.7]	✓	✓	Laminar
<b>-22F</b>	1.0[3.8]	✓		Laminar


### Suffix Options:

- AR Anti-Rotation Pins
- CST Copper Supply Tubes
- G 1-1/4" [32mm] Grid Strainer Drain
- MY Mixing Yoke Assembly Instead of Copper Supplies

**Architectural/Engineering Approval**

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in/Overview dimensions

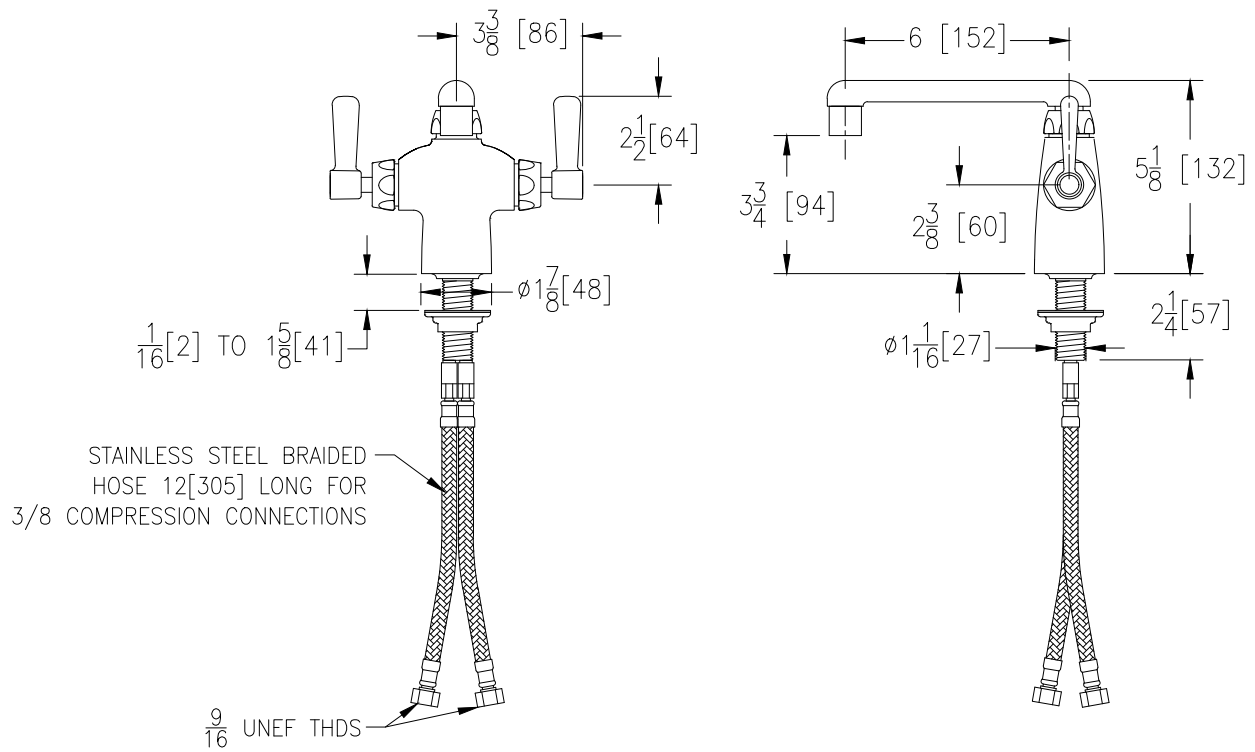

*Note: All dimensions are for reference only. Do not use for pre-plumbing.*