


**ZS415SS**

BODY ASSEMBLY W/ "TYPE SS" STRAINER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

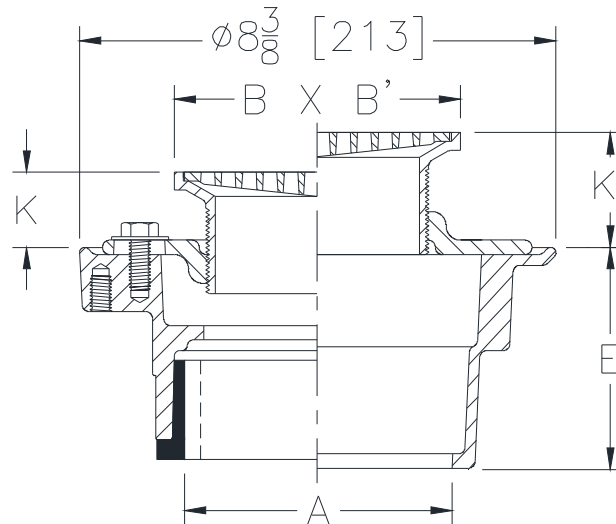

| Strainer Designation | Dimensions In Inches [mm] |                             |             |              |              |              | Approx. Wt. Lbs. [kg] | Strainer Open Area Sq. In. [cm²] |
|----------------------|---------------------------|-----------------------------|-------------|--------------|--------------|--------------|-----------------------|----------------------------------|
|                      | A<br>Pipe Size            | B x B'<br>Strainer Top Size | K           |              | K'           |              |                       |                                  |
|                      |                           |                             | Min.        | Max.         | Min.         | Max.         |                       |                                  |
| -5SS                 | 2, 3 [51, 76]             | 5 x 5 [127 x 127]           | 1 [25]      | 1-19/32 [40] | 1-1/4 [32]   | 2-3/8 [60]   | 11 [5]                | 8-1/2 [55]                       |
| -6SS                 | 2, 3, 4 [51, 76, 102]     | 6 x 6 [152 x 152]           | 1 [25]      | 1-27/32 [47] | 1-13/32 [36] | 2-19/32 [66] | 12 [5-1/2]            | 13 [84]                          |
| -8SS                 | 3, 4 [76, 102]            | 8 x 8 [203 x 203]           | 1-3/32 [28] | 1-7/8 [48]   | 1-3/4 [44]   | 2-5/8 [67]   | 15 [7]                | 24-1/2 [158]                     |

**ENGINEERING SPECIFICATION: ZURN ZS415SS**

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE SS" heel-proof stainless steel medium duty square strainer.

**OPTIONS** (Check/specify appropriate options)**PIPE SIZE**

2, 3, 4 [51, 76, 102]  
2 [51]  
3 [76]  
4 [102]  
2, 3, 4 [51, 76, 102]  
2, 3, 4 [51, 76, 102]

(Specify size/type) **OUTLET**

\_\_\_\_\_ IC Inside Caulk  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ IP Threaded  
\_\_\_\_\_ NH No-Hub  
\_\_\_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

3-7/8 [98]  
2-3/8 [60]  
2-5/8 [67]  
2-7/8 [73]  
3-7/8 [98]  
3-3/4 [95]

**PREFIXES**

\_\_\_\_\_ ZS D.C.C.I. Body Assembly w/ Square type 304 (CF8) Stainless Steel Top\*  
\_\_\_\_\_ ZM D.C.C.I. Body Assembly w/ Square type 316 (CF8M) Stainless Steel Top

**SUFFIXES**

\_\_\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron  
\_\_\_\_\_ -G Galvanized Cast Iron  
\_\_\_\_\_ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])  
\_\_\_\_\_ -TC Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)  
\_\_\_\_\_ -U 1 - 3 [25 - 76] High Extension Adapter  
\_\_\_\_\_ -V Backwater Valve  
\_\_\_\_\_ -VP Vandal-Proof Secured Top  
\_\_\_\_\_ -Y Sediment Bucket

\* Regularly furnished unless otherwise specified.