


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

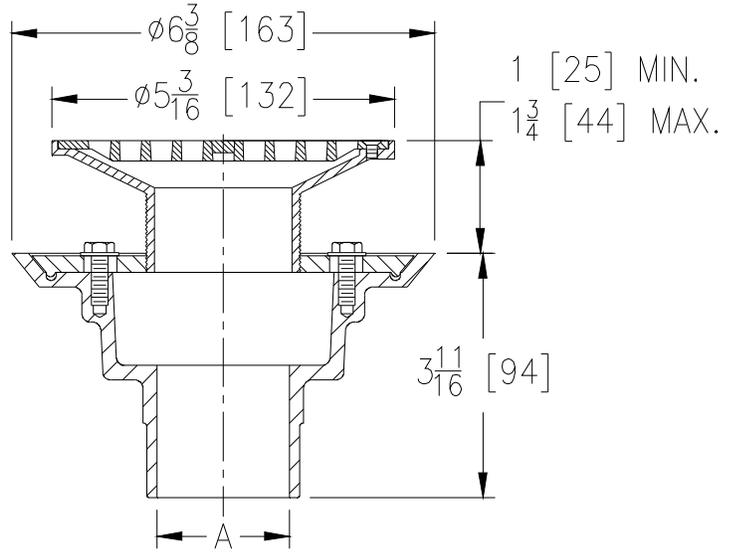

Product	'A' Connections	Grate Open Area Sq. In [cm ²]
___ FD2254-NH2-S5	2 [51] No-Hub	3 [21]
___ FD2254-PO2-S5	2 [51] Push-On	
___ FD2254-IC2-S5	2 [51] Caulk	
___ FD2254-IP2-S5	2 [51] IPS	

FD2254-CI-S5 Cast Iron Shower Drain

Recommended in showers where a membrane is generally used. The unit has an adjustable head and nickel strainer to meet finished floor elevations. The drain is furnished with a cast iron body and clamping collar. Beveled clamping provides easier subfloor installation.

Options:

- ___ **-CP** Chrome Plated Strainer Assembly
- ___ **-PB** Polished Brass Strainer Assembly

Typical Installation

