




Model ZW206

Solenoid Control Valve

Application

The Zurn Wilkins Model ZW206 Solenoid Operated Control Valve is designed to be either fully open or fully closed in response to an electrical signal to the solenoid pilot assembly. This valve is equipped with a 3-way electrical solenoid-operated pilot that can be plumbed to be normally closed (energize to open) or normally open (energize to close) providing main valve on/off capabilities.



NSF/ANSI/CAN 61

Standards Compliance:

- ANSI/AWWA C530
- Meets the requirements of NSF/ANSI 61/CAN*
*(0.25% MAX. WEIGHTED AVERAGE LEAD CONTENT)

Materials

Main Valve Body	Ductile Iron ASTM A536
Main Valve Bonnet	Ductile Iron ASTM A536
Disc Guide	Stainless Steel
Seat	Stainless Steel
Disc	Buna-N Rubber
Diaphragm	Nylon Reinforced Buna-N
Stem	Stainless Steel
Spring	Stainless Steel
Coating	FDA Approved Fusion Epoxy


Pilot System Specifications

Rubber Parts:	Buna-N Rubber Synthetic Rubber
Solenoid Control Body:	Brass ASTM B283
Enclosure:	NEMA Type 1, 2, 3, 3S, 4, 4X general purpose watertight
Voltages:	110, 220-50Hz AC 24, 120, 240, 480-60Hz AC 6, 12, 24, 120, 240-DC others available

Max. operating pressure differential:	200 psi
Coil:	Insulation molded Class F
Watts AC	6
AC Volt Amps Inrush	30
AC Volt Amps Holding	16
Watts DC	10.6

Schematic Diagram

Item	Description of Standard Features
1	Main Valve
2	850XL Isolation Valve
3	SXL "Wye" Type Strainer
4	PV-SOL3 3-Way Solenoid Control

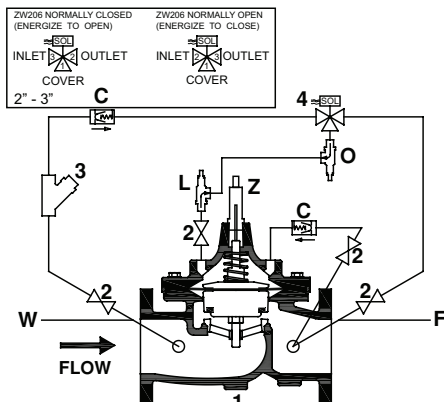

END CONNECTION	BODY CONFIGURATIONS		GLOBE STYLE BODY		ANGLE STYLE BODY
	PRESSURE RATING	FULL PORT	REDUCED PORT		
Threaded	400 psi max.	1 1/4"-3"	n/a	1 1/4"-3"	
Flanged	ANSI Class 150, 250 psi max.	1 1/2"-16"	3"-10"	1 1/2"-10"	
	ANSI Class 300, 400 psi max.				
Grooved	300 psi max.	1 1/2"-10"	n/a	1 1/2"-10"	

MINIMUM INLET PRESSURE 10 PSI

Temperature Rating: Water 33°F to 140°F

Standard Features

- Blue Epoxy Coated, FDA Approved
- Pilot Assembly
 - SXL "Wye" Type Strainer
 - 850XL Isolation Valves
 - 3-Way Accelerator Pilot (sizes 4" - 10")
- ANSI Class 150 Flanges
- Copper Tubing and Brass Fittings

Options (Add suffix letters to ZW206)

Function

- C - 40XL2 Hydraulic Check with Isolation Valve
- L - SC1 Closing Speed Control (Standard on 6" or larger)
- O - SC1 Opening Speed Control

Body

- A - Angle Style Body
- R - Reduced Port Body

Connections

- G - IPS Grooved
- TH - NPT Threaded
- Y - ANSI Class 300 Flanges

Main Valve Options

- V - Viton Rubber Internals, Rated 180° (1-1/4" - 6")
- Z - ZPI Visual Position Indicator

Pilot System


- SP - All Stainless Steel Pilotry (replaces all brass fittings, pilot valve and copper tubing. "GL" Option included)
- SH - Stainless Steel Braided Hoses (only replaces Copper Tubing)
- NC - Normally Closed (energize to open) Main Valve, 120vac Solenoid
- NO - Normally Open (energize to close) Main Valve, 120vac Solenoid
- 24NC - Normally Closed (energize to open) Main Valve, 24vac Solenoid
- 24NO - Normally Open (energize to close) Main Valve, 24vac Solenoid
- NS - Non-Standard Solenoid specify Voltage/Frequency/AC/DC/ Operation
- MO - Manual Operator on Solenoid Valve (to control during power failure)
- W - Independent Operating Pressure
- F - Atmospheric Drain
- RV - Pilot Installed on reverse side
- SO - Limit Switch Open Trip
- SC - Limit Switch Closed Trip
- SD - Limit Switch Dual Trip

Globe and Angle Main Valve Dimensions

DIM	FULL PORT	VALVE SIZE INCHES (mm)											
		1 1/4 (32)	1 1/2(38)	2 (50)	2 1/2(65)	3 (80)	4 (100)	6 (150)	8 (200)	10 (250)	12 (300)	14 (350)	16 (400)
A	Threaded	7 1/4	7 1/4	9 7/16	11	12 1/2							
	Class 150 Flange		8 1/2	9 3/8	11	12	15	20	25 3/8	29 3/4	34	39	41 3/8
	Class 300 Flange		9	10	11 5/8	13 1/4	15 5/8	21	26 7/16	31 1/8	35 1/2	40 1/2	43 1/2
	Grooved		8 1/2	9	11	12 1/2	15	20	25 3/8	29 3/4			
B	Diameter	5 5/8	5 5/8	6 3/4	8	9 3/16	11 11/16	15 3/4	20 1/8	23 11/16	27 1/2	31 3/4	34 1/2
C	Max.	5 3/4	5 3/4	6 3/16	7 3/8	8	10 3/16	12 5/16	15 9/16	17 5/8	20 3/16	22 13/16	25 7/8
D	Threaded/Grooved	1 3/8	1 3/8	1 3/4	2 1/8	2 9/16	3 7/16	5	5	5 13/16	6 3/4	8 7/8	8 13/16
	Class 150 Flange		2 1/2	3	3 1/2	3 3/4	4 1/2	5 1/2	6 3/4	8	9 1/2	10 1/2	11 3/4
	Class 300 Flange		3	3 1/4	3 3/4	4 1/8	5	6 1/4	7 1/2	8 3/4	10 1/4	11 1/2	12 3/4
E	NPT Body Tap	3/8	3/8	3/8	1/2	1/2	3/4	3/4	1	1	1	1	1
F	NPT Cvr. Plug Tap	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1	1
G	NPT Cover Tap	3/8	3/8	3/8	1/2	1/2	3/4	3/4	1	1	1	1	1
H	Threaded	3 1/4	3 1/4	4 3/4	5 1/2	6 1/4							
	Class 150 Flange		4	4 3/4	5 1/2	6	7 1/2	10	12 11/16	14 7/8			
	Class 300 Flange		4 1/4	5	6	6 7/16	8	10 1/2	13 1/4	15 9/16			
	Grooved		4 7/16	4 3/4	5 1/2	6	7 1/2	10	12 11/16	14 7/8			
J	Threaded	1 15/16	1 15/16	3 1/4	4	4 1/2							
	Class 150 Flange		4	3 1/4	4	4	5	6	8	8 5/8			
	Class 300 Flange		4 1/4	3 1/2	4 5/16	4 7/16	5 5/16	6 1/2	8 1/2	9 5/16			
	Grooved		3 3/16	3 1/4	4	4 1/4	5	6	8	8 5/8			
Valve Stem Internal Thread		10-32	10-32	10-32	10-32	1/4-20	1/4-20	1/4-20	3/8-16	3/8-16	3/8-16	3/8-16	3/8-16
Stem Travel (in)		7/16	7/16	3/4	7/8	1	1 3/16	1 3/4	2 3/8	2 13/16	3 7/16	3 13/16	4 5/16
Approx. Wt. (lbs)		22	26	36	55	70	130	240	440	720	820	1200	1550


Reduced Port Main Valve Dimensions

DIM		VALVE SIZE INCHES (mm)				
		3" (80)	4" (100)	6" (150)	8" (200)	10" (250)
A	Class 150 Flange	10 1/4	14	17 3/4	21 7/16	26
	Class 300 Flange	11	14 1/2	18 11/16	22 7/16	27 7/16
B	Dia	6 3/4	9 3/16	11 11/16	15 3/4	20 1/8
C	Max	6 3/8	8 7/16	12 5/16	13 1/4	16 3/4
D	Class 150 Flange	3 3/4	4 1/2	5 1/2	6 3/4	8
	Class 300 Flange	4 1/8	5	6 1/4	7 1/2	8 3/4
E	NPT Body Tap	3/8	1/2	3/4	3/4	1
F	NPT Cvr. Plug Tap	3/8	1/2	3/4	3/4	1
G	NPT Cvr. Tap	3/8	1/2	3/4	3/4	1
Valve Stem Internal Thread		10-32	1/4-20	1/4-20	3/8-16	3/8-16
Stem Travel (in)		3/4	1	1 1/5	1 3/4	2 3/8
Approx. Wt. (Lbs)		35	80	140	275	480

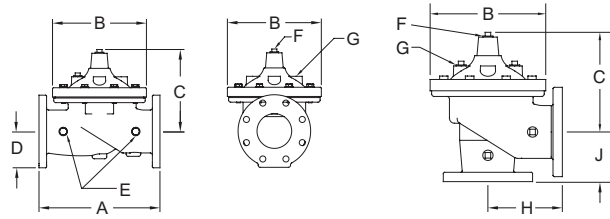

Globe Style Body


Angle Style Body

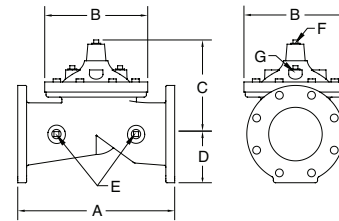


Reduced Port Body

Pilot System Dimensions

PILOT SYSTEM DIMENSIONS		VALVE SIZE INCHES (mm)												
DIM		1-1/4 (32)	1-1/2 (40)	2" (50)	2-1/2" (65)	3" (80)	4" (100)	6" (150)	8" (200)	10" (250)	12" (300)	14" (350)	16" (400)	
		Full Port Body	X Max. (inches)	8 1/8	8 1/8	8 1/8	8 1/8	8 5/8	13	13 3/16	15	16	20	23
Y Max. (inches)	4 1/8		4 1/4	4 1/4	5 1/4	5 1/4	5 13/16	7 7/8	10	12	14	16	17 1/2	
Z Max. (inches)	7		6 7/8	7	7	7 1/2	11	12	14 1/4	15 1/2	18	20	21 1/2	
Reduced Port Body	X Max. (inches)					8 1/8	8 5/8	13	13 3/16	15				
	Y Max. (inches)					4 1/4	5 1/4	5 13/16	7 7/8	10				
	Z Max. (inches)					7	7 1/2	11	12	14 1/4				
Angle Body	X Max. (inches)	8 1/2	8 1/2	8 1/2	8 1/2	9	13 1/2	13 1/2	15 1/2	16 1/2				
	Y Max. (inches)	5	5	5	5	5	5 13/16	7 7/8	10	12				
	Z Max. (inches)	7 1/2	7 1/2	7 1/2	7 1/2	8	11 1/2	12 1/2	15	16				

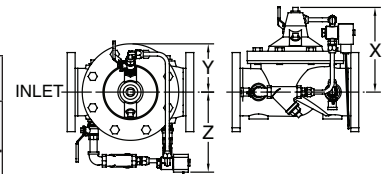

Globe Pilot System Dimensions

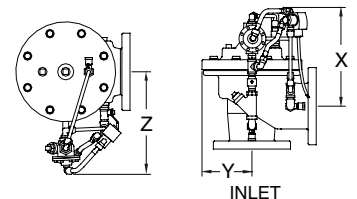

Angle Pilot System Dimensions

Flow Characteristics

Full Port Globe and Angle Valve size	inches (mm)	1 1/4 (32)	1 1/2 (40)	2 (50)	2 1/2 (65)	3 (80)	4 (100)	6 (150)	8 (200)	10 (250)	12 (300)	14 (350)	16 (400)
Reduced Port Globe Valve Size	inches (mm)			3 (80)		4 (100)	6 (150)	8 (200)	10 (250)				
Suggested Flow (GPM)	Max. Continuous	93	125	210	300	460	800	1800	3100	4900	7000	8400	11000
	Max Intermittent	120	160	260	375	600	1000	2250	4000	6150	8700	10500	13800
	Min. Continuous	10	10	15	20	30	50	115	200	300	435	530	690
Suggested Flow (Liters/sec)	Max. Continuous	6	8	13	19	29	50	113	195	309	550	665	870
	Max. Intermittent	7.6	10	16.4	23	37	62	142	246	388	440	530	95
	Min. Continuous	.6	.6	0.9	1.3	1.9	3.2	7.2	13	19	28	33	43

Suggested flow calculations are based on flow through Schedule 40 Pipe. Maximum Continuous flow is approx. 20 ft./sec (6.1 meters/sec) & Maximum Intermittent is approx. 25 ft./sec (7.6 meters/sec).

Operation


The Model ZW206 is supplied with an electrical-actuated pilot assembly. This pilot has two basic parts: 1) the solenoid, or coil, itself, and 2) the pilot valve that channels flow of the liquid being handled. These two parts combine to form a single unit called the "Solenoid Controlled Pilot".

Operating Sequence:

Assuming the use of a NORMALLY CLOSED (energized to open) 3-way Solenoid Pilot Valve:

- a) The sequence begins with the solenoid de-energized. The pilot connects inlet pressure to the main valve cover holding the main valve closed.
- b) When the solenoid is energized: the pilot valve switches allowing pressure in the cover to be vented downstream. This enables inlet pressure to open the main valve.
- c) When the solenoid is de-energized, the pilot valve returns to its original position, connecting the cover back to inlet pressure which closes the main valve. Pilot and valve are now ready for the next sequence.

Typical Installation

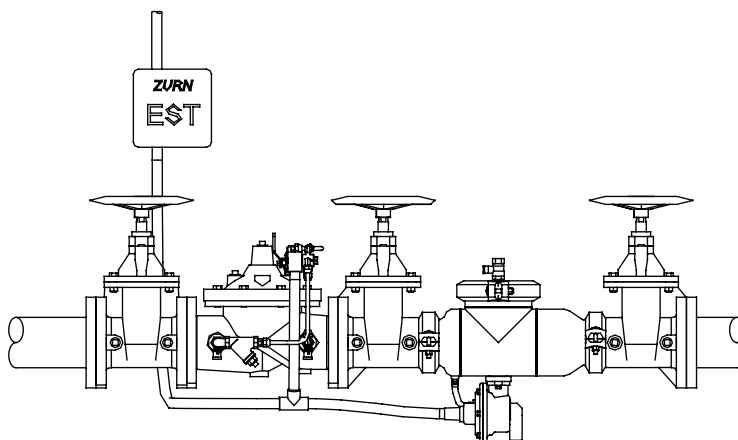

Model ZW206 w/ 375ASTMS (Shown)


Specifications

The Solenoid Control Valve shall be a single seated, line-pressure-operated, diaphragm-actuated, pilot-controlled globe or angle valve. The valve shall seal by means of a corrosion resistant seat and resilient, rectangular seat disc. These and other parts shall be replaceable in the field; all such service and adjustments to be possible without removing the valve from the line. The stem of the basic valve shall be guided top and bottom by integral bushings. The basic valve and its pilot control system shall contain no packing glands or stuffing boxes. The diaphragm shall not be used as a seating surface, nor shall pistons be used as an operating medium. All internal and external ferrous surfaces shall be coated with a high-quality, FDA Approved blue fusion epoxy coating. The valve shall be certified to NSF/ANSI/CAN Standard 61. The Solenoid Control Valve shall be a ZURN WILKINS Model ZW206.

Job Name _____ **Contractor** _____

Job Location _____ **Engineer** _____

BODY MINIMUM FRICTION LOSS

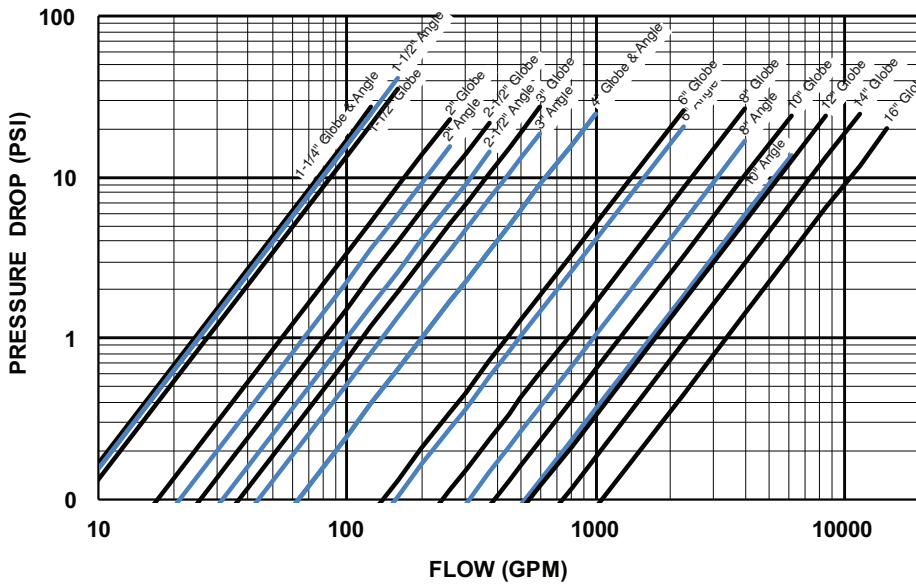


*** Notes for Body Minimum Friction Loss Chart:**

Minimum inlet pressure is 10 psi higher than set point or the additional body friction loss intended flow, whichever is higher. (friction loss may be important at flows above 20 ft/s)

Example: A 6" valve intended to flow 2000 GPM at 150 psi has a friction loss of 20 psi at 2000 GPM. The minimum inlet pressure would be 150 + 20 = 170 psi. When inlet pressure is below set point, the outlet pressure will be the pressure at the inlet minus the friction loss.

WATERWORKS PRESSURE REDUCTION LIMIT CHART

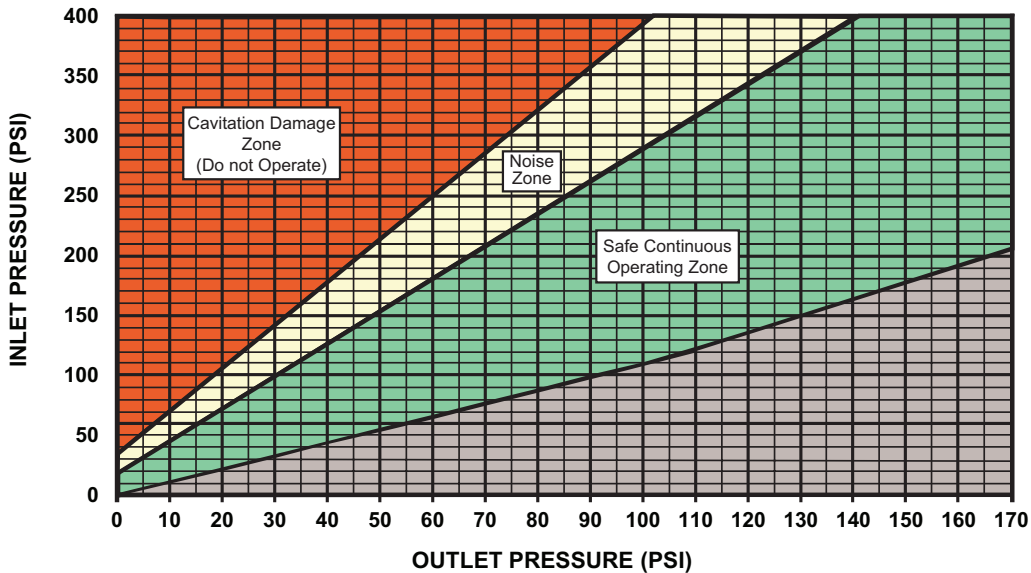

Notes for Pressure Reduction Limit Chart: Determine if the outlet reduced flowing pressure is within the safe operating zone for your Zurn Automatic Control Valve. First, find the system inlet pressure on the left axis and draw a horizontal line from that point across the chart. Then find the outlet reduced flowing pressure on the bottom axis and draw a vertical line up to where it meets the first line. The point where the lines intersect should be in the green "Safe Continuous Operating Zone" below and to the right of the yellow "Noise Zone". If the operating point is in the area labeled "Noise Zone" or "Cavitation Damage Zone", the valve seal ring, plunger, or body may be damaged. The lifespan of the valve will be reduced. Damage from cavitation to internal components may cause high pressure downstream and/or external leaks. To move out of the cavitation or noise zone you will need to place two valves in series in order to safely reduce pressure. Use the chart to pick an intermediate pressure in the green zone that you will set the first valve in series to. The intermediate pressure you pick will then become the inlet pressure for the 2nd valve and you can verify it will be in the green zone using the chart.