



## Model ZW4104

### Pressure-Tru™ Automatic Fire Control Valve

#### Application

The Pressure-Tru™ ZW4104 Series Pressure Reducing Valve is listed as a floor control valve, an indicating valve, and a check valve in automatic sprinkler systems as well as a standpipe valve for CLASSII systems. Regulates pressure under both flow and no-flow conditions.

#### Standards Compliance

- UL® Listed
- C-UL® Listed
- SS option - California State Fire Marshall Listed

#### Material

Castings/Internals Cast bronze ASTM B 584

Elastomers                      Buna Nitrile (FDA approved)  
   EPDM (FDA approved)

#### Features

Sizes: 1 1/2"

Maximum inlet pressure                      400 psi

End connections:

FNPT

ANSI B1.20.1

Grooved

AWWA C606

Factory Set




ZW4104


#### Options

(Suffixes can be combined)


- ☐ ZW4104 - angle type valve
- ☐ G - with grooved inlet and outlet connections
- ☐ SS - with integral supervisory switch, contact rating 3 amps @ 125 VAC and tamper resistant cover
- ☐ MSA - with monitor switch adapter
- ☐ CAP - with capped bonnet, no handwheel assembly
- ☐ CH - with rough chrome finish

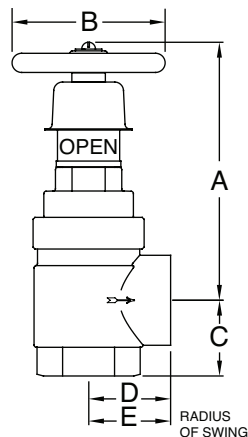


ZW4104

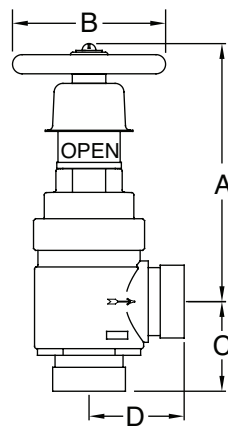

ZW4104G

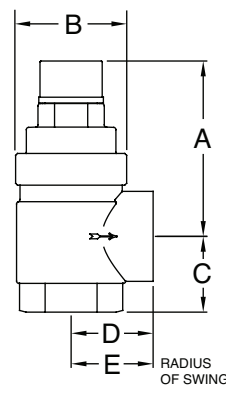

ZW4104CAP

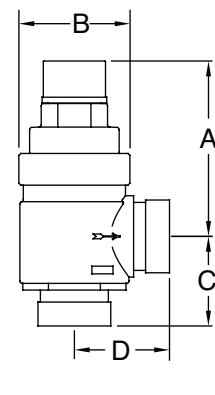

ZW4104GCAP


#### Dimensions & Weights (do not include pkg.)

MODEL	DIMENSIONS (approximate)													
	A OPEN		A CLOSED		B		C		D		E		WEIGHT	
											Radius of Swing			
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg
ZW4104	6 3/4	171	6 1/8	155	4	101	2	51	2 3/16	55	2 3/16	55	9	4
ZW4104G	6 3/4	171	6 1/8	155	4	101	2 3/8	60	2 1/2	63	n/a	n/a	9	4
ZW4104CAP	4 5/8	117	n/a	n/a	3 3/4	95	2	51	2 3/16	55	2 3/16	55	8	3.5
ZW4104GCAP	4 5/8	117	n/a	n/a	3 3/4	95	2 3/8	60	2 1/2	63	n/a	n/a	8	3.5


# Residual Pressure Charts

For Pressure-Tru® 1 1/2" Models: ZW4100, ZW4100G, ZW4104 & ZW4104G

**ZW4100 SERIES  
25-75 GPM**

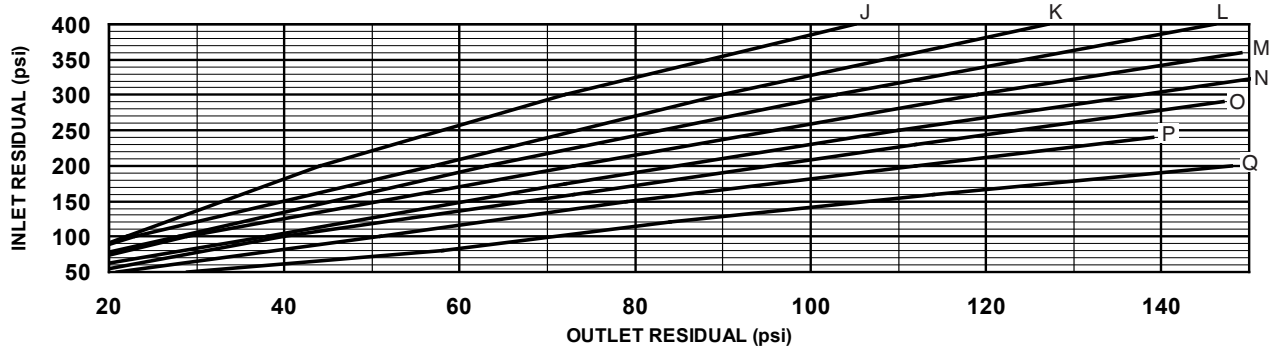

**ZW4100 SERIES  
76-125 GPM**

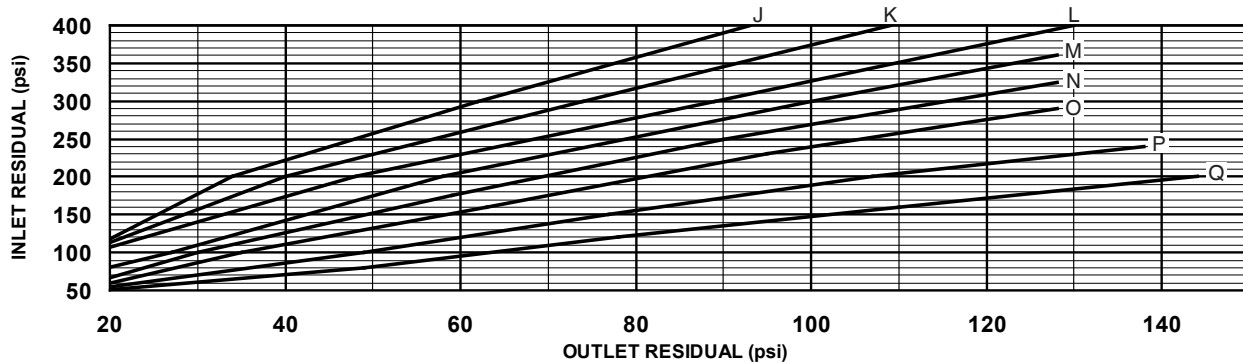

## Choosing The Correct Settings

In designing a sprinkler system, a minimum of 20 psi pressure differential (the difference between the inlet static pressure and the valve outlet set static pressure) is recommended to assure a well regulated and efficient system. In choosing the correct setting for the Pressure-Tru® valve, refer to the Residual Pressure Charts, Static Pressure Chart and the following procedures:

1. Determine the demand in gallons per minute required downstream of the valve.
2. Determine the standpipe residual or "flow pressure" at the valve inlet.
3. Locate the appropriate flow chart based on GPM required and body style.
4. Locate the inlet residual pressure on the vertical axis of the chart and draw a horizontal line from this pressure across the chart.
5. Locate the desired valve outlet residual pressure on the horizontal axis of the chart and draw a vertical line from this pressure.
6. The curve nearest the intersection of the two lines drawn is the appropriate type for the valve.
7. To determine the static outlet pressure, locate the static chart. Determine the valve inlet static pressure shown on the vertical axis and draw a horizontal line from that pressure to the appropriate curve determined above, then draw a vertical line down to the horizontal axis and read the static outlet pressure.

## Maximum Rated Inlet Pressure

Maximum inlet pressure, to assure a maximum outlet pressure of 175 psi. Inlet side of valves can be safely tested up to 400 PSI during system hydrostatic leak test.


Bonnet Type	Max Inlet Pressure psi (kpa)	
J	400	(2750)
K	400	(2750)
L	400	(2750)
M	360	(2475)
N	325	(2240)
O	290	(2000)
P	240	(1650)
Q	200	(1375)

Proper performance is dependent upon licensed, qualified personnel performing regular, periodic testing according to ZURN WILKINS' specifications and prevailing governmental & industry standards and codes and upon following these installation instructions. Failure to do so releases ZURN WILKINS of any liability that it might otherwise have with respect to that device. Such failure could also result in an improperly functioning device.


# Residual Pressure Charts

For Pressure-Tru® 1 1/2" Models: ZW4100, ZW4100G, ZW4104 & ZW4104G


**ZW4100 SERIES**  
126-150 GPM

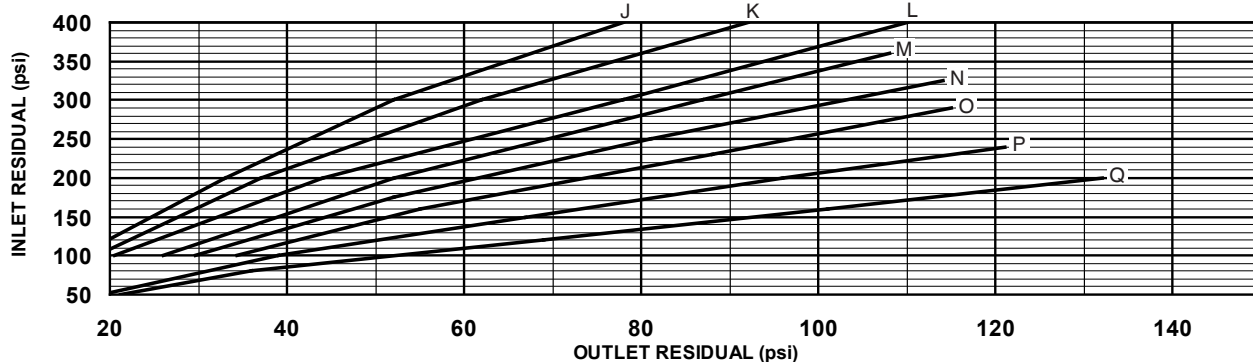

**ZW4100 SERIES**  
151-175 GPM

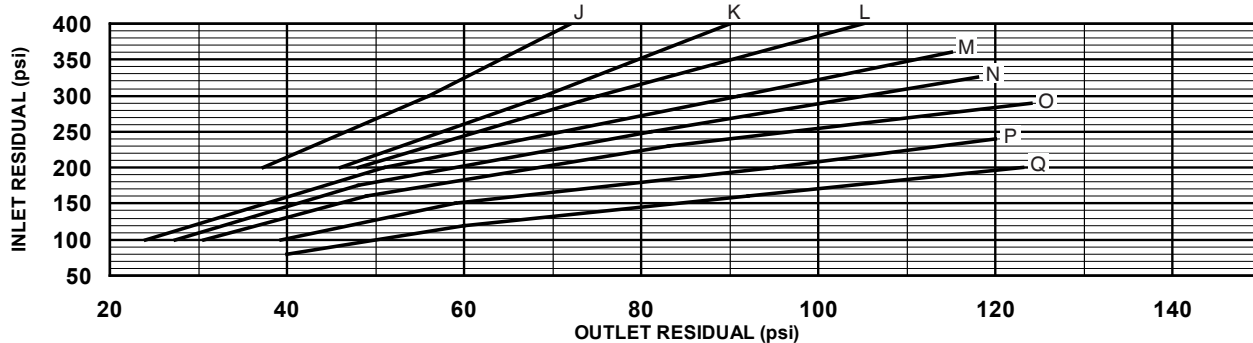

**ZW4100 SERIES**  
176-200 GPM

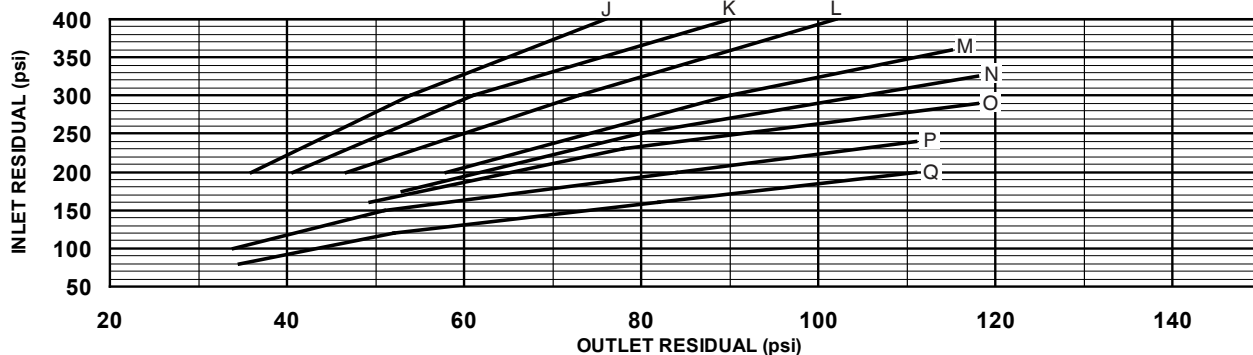

**ZW4100 STATIC CHART**

