




QEDE_BFGX

XL BRASS F1960 EXPANSION PEX x FPT DROP EAR ELBOW

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

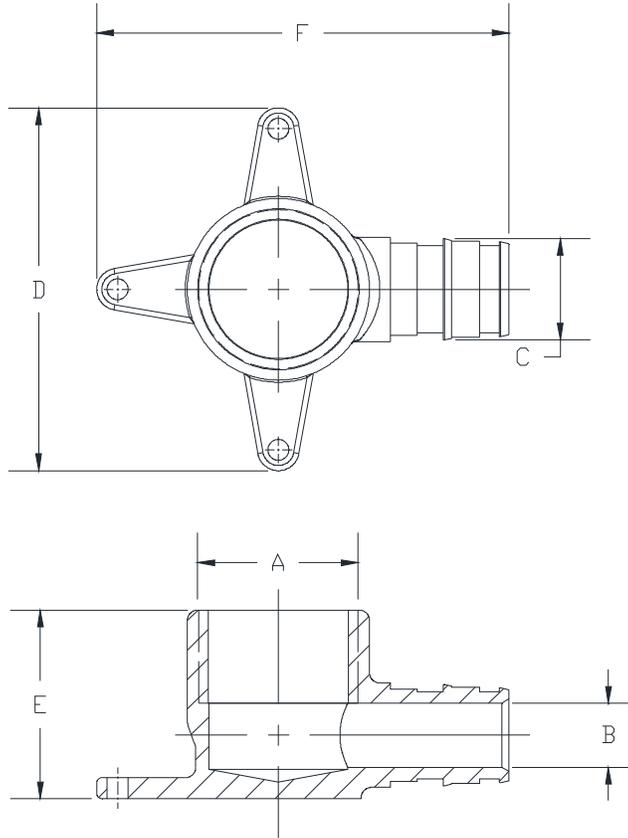

| Part Number | XL Brass F1960 Expansion PEX x FPT Drop Ear Elbow Size | Dimensions in In [mm] | | | | | |
|-------------|---|-----------------------|-----------|-----------|-----------|-----------|-----------|
| | | A | B | C | D | E | F |
| QEDE33BFGX | 1/2" EX PEX x 1/2" FPT | 1/2 NPT | 0.38 [10] | 0.61 [16] | 1.66 [42] | 1.65 [42] | 2.15 [55] |
| QEDE44BFGX | 3/4" EX PEX x 3/4" FPT | 3/4 NPT | 0.60 [15] | 0.87 [22] | 2.05 [52] | 1.69 [43] | 2.39 [61] |

Engineering Specification: Zurn PEX® XL-Low Lead Brass F1960 Expansion PEX x FPT Drop Ear Elbow

The QEDE__BFGX is used with Zurn Non-Barrier Pex tubing in potable water applications. Not for use in reverse osmosis systems or in areas with known localized aggressive water chemistries. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube and Zurn PEX reinforcing rings are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are 3rd Party certified as complying with the following standards: NSF/ANSI Standard 61, NSF/ANSI Standard 372 (Low Lead), ASTM F1960, CSA B137.5

Accessories

- ___ QER3X 1/2" PEX Expansion Reinforcing Ring w/Stop
- ___ QER4X 3/4" PEX Expansion Reinforcing Ring w/Stop
- ___ QEMT345 F1960 Manual Expansion Tool Kit - 1/2" to 1"