




Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

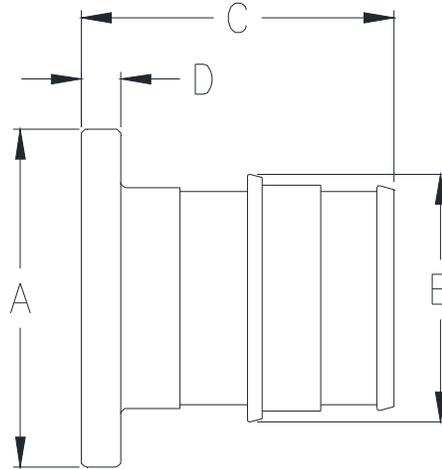

Part Number	XL Brass F1960 Expansion PEX Test Plug Size	Dimensions in In [mm]			
		A	B	C	D
QEP3GX	1/2" EX PEX	0.69 [18]	0.61 [16]	0.82 [21]	0.13 [3]
QEP4GX	3/4" EX PEX	0.95 [24]	0.87 [22]	1.06 [27]	0.13 [3]
QEP5GX	1" EX PEX	1.18 [30]	1.11 [28]	1.29 [33]	0.13 [3]
QEP6GX	1-1/4" EX PEX	1.46 [37]	1.36 [34]	1.56 [40]	0.13 [3]
QEP7GX	1-1/2" EX PEX	1.61 [41]	1.49 [38]	1.81 [46]	0.13 [3]
QEP8GX	2" EX PEX	2.28 [58]	2.08 [53]	2.26 [57]	0.13 [3]

Engineering Specification: Zurn PEX® XL-Low Lead Brass F1960 Expansion PEX Test Plug

The QEP__GX is used with Zurn Non-Barrier Pex tubing in potable water applications. Not for use in reverse osmosis systems or in areas with known localized aggressive water chemistries. Manufactured from EcoBrass®,C69300. These fittings, as a system with Zurn PEX® tube and Zurn PEX reinforcing rings are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are 3rd Party certified as complying with the following standards: NSF/ANSI Standard 61, NSF/ANSI Standard 372 (Low Lead), ASTM F1960, CSA B137.5

Accessories

- ___ QER3X 1/2" PEX Expansion Reinforcing Ring w/Stop
- ___ QER4X 3/4" PEX Expansion Reinforcing Ring w/Stop
- ___ QER5X 1" PEX Expansion Reinforcing Ring w/Stop
- ___ QER6X 1-1/4" PEX Expansion Reinforcing Ring w/Stop
- ___ QER7X 1-1/2" PEX Expansion Reinforcing Ring w/Stop
- ___ QER8X 2" PEX Expansion Reinforcing Ring w/Stop
- ___ QEMT345 F1960 Manual Expansion Tool Kit - 1/2" to 1"