




PEX-AI-PEX Brass Compression Elbow - QHPAPE__C

Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

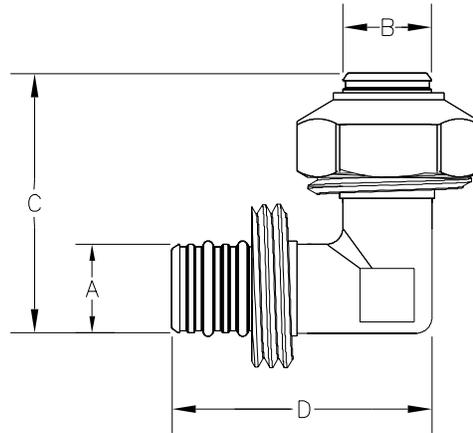

Part Number	Nominal Size	'A' in [mm]	'B' in [mm]	'C' in [mm]	'D' in [mm]
QHPAPE33C	1/2"	.47 [11.8]	.47 [11.8]	1.57 [39.9]	1.61 [41]
QHPAPEJJC	5/8"	.62 [15.8]	.62 [15.8]	1.73 [43.9]	1.75 [44.5]
QHPAPE44C	3/4"	.78 [19.8]	.78 [19.8]	1.95 [49.4]	1.95 [49.4]
QHPAPE55C	1"	1.02 [25.8]	1.02 [25.8]	2.24 [57]	2.24 [57]

Engineering Specification: ZurnPEX® PEX-AI-PEX brass compression elbow. The QHPAPE__C elbow is used to make sharp 90° bends. Tubing is sealed with the use of two **buna-N** O-rings per barb. For use with PEX-AI-PEX Alumicor® tubing made to ASTM F1281. For use in radiant heating and snow melting systems.

Accessories

___ Q3PAPX	1/2" Alumicor® PEX-AI-PEX
___ QJPAPX	5/8" Alumicor® PEX-AI-PEX
___ Q4PAPX	3/4" Alumicor® PEX-AI-PEX
___ Q5PAPX	1" Alumicor® PEX-AI-PEX

Rev.	Date: 02/14/08	C.N. No. 98154
Dwg. No. 83671		Prod. No. QHPAPE__C