




# QuickPort™ Manifold – QKIPSP Specification Sheet

Tag \_\_\_\_\_

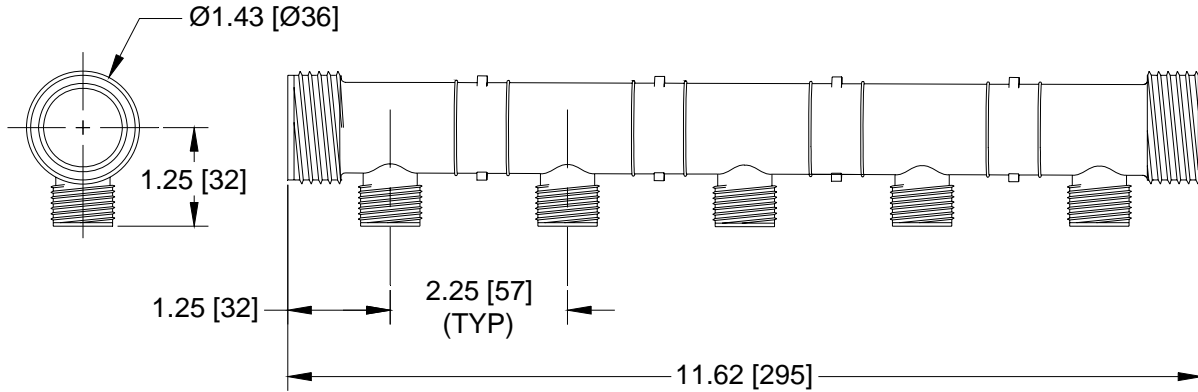

**Engineering Specification:** Zurn 1" diameter polysulfone QuickPort® Manifold comprised of five (5) 1/2" male straight pipe thread outlets and two (2) 1" male pipe thread inlets. Manifold is rated at a maximum pressure of 100 PSI at 73°F with valves, and a maximum pressure of 160 PSI at 73°F without valves. Each outlet

shall have the option of a stop valve allowing for individual on/off control. Potable water plumbing installations can use either a single manifold section or multiple manifold sections coupled together NSF listed. Meets performance requirements of ASTM F877 and CSA B137.5.

## Plumbing Accessories

___ QQFC55X	1" Swivel x 1" Barb Adapter	___ QPBV3XB	1/2" FPT x 1/2" Quick/Sert Crimp Brass Ball Valve
___ QQFC45X	1" Swivel x 3/4" Barb Adapter	___ QQSFC23XP	3/8" Barb x 1/2" FPT Swivel Cone Conn (Plastic Nut)
___ QQTFC45X	1" Swivel x 3/4" MIP Adapter	___ QQSFC33XP	1/2" Barb x 1/2" FPT Swivel Cone Conn (Plastic Nut)
___ QTC5FB	1" Cap	___ QQSFC23X	3/8" Barb x 1/2" FPT Swivel Cone Conn (Brass Nut)
___ QFNCR4QP	1" x 3/4" Nom Tube Nut-Ring-Cone	___ QQSFC33X	1/2" Barb x 1/2" FPT Swivel Cone Conn (Brass Nut)
___ QT555TQP	1" x 1" x 1" Tee	___ QFNCR2QP	1/2" FPT x 3/8" Nom Tube
___ QT553TQP	1" x 1" x 1/2" Tee	___ QAFA33FQP	1/2" FPT x 1/2" Nom Tube
___ QE55TQP	1" x 1" Elbow	___ QTC3FQP	1/2" Cap
___ QE53TQP	1" x 1/2" Elbow	___ QKLABELS	Indicator Labels
___ QE64TQP	1-1/4" x 1" Elbow	___ QKPANEL29	Access Panel 14" x 29"
___ QC55FQP	1" Female Coupling	___ QKPANEL38	Access Panel 14" x 38"
___ MANCOUPLING	1" Double Swivel Coupling	___ QKPANEL54	Access Panel 14" x 54"
___ QH5	1" Hanger	___ QMBP	Manifold Dual Mounting Bracket
___ QPBV2X	1/2" FPT x 3/8" Quick/Sert CR Crimp Plastic Ball Valve		
___ QPBV3X	1/2" FPT x 1/2" Quick/Sert CR Crimp Plastic Ball Valve		
___ QPBV2XB	1/2" FPT x 3/8" Quick/Sert Crimp Brass Ball Valve		

Rev. D	Date: 7/15/09	C.N. No. 109973
Dwg. No. 65925		Prod. No. QKIPSP