




QPM443

QuickSert CR™ POLYMER MULTI-PORT TEES 3/4" INLET X OUTLET W/ 1/2" OUTLET PORTS

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

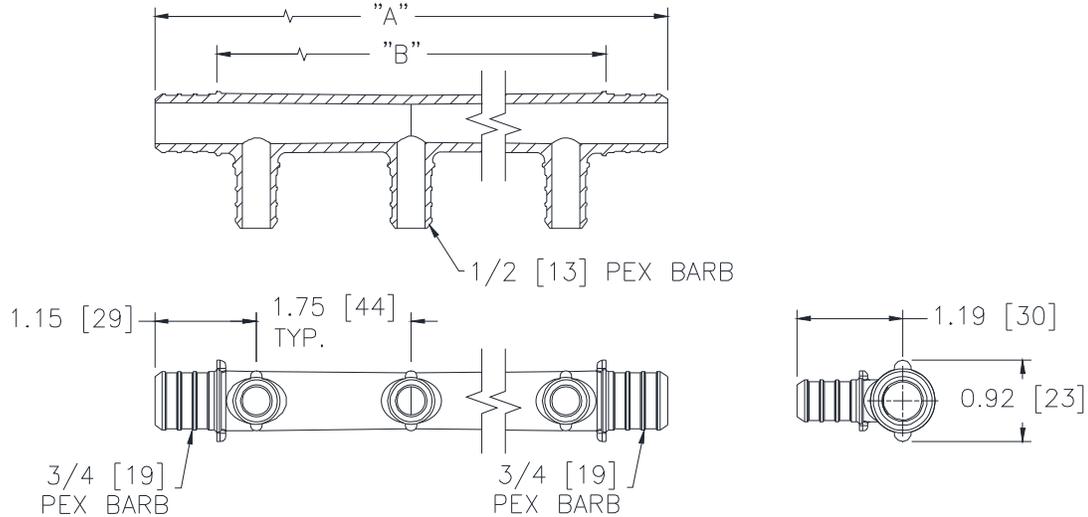

*SHOWN AS QPM443-3

QuickSert CR™ Polymer Multi-Port Tees			
Part Number	Description	"A" In [mm]	"B" In [mm]
QPM443-2	(1) 3/4" PEX Crimp Inlet and Outlet w/ (2) 1/2" PEX Crimp Outlet Ports	4.05 [103]	2.65 [67]
QPM443-3	(1) 3/4" PEX Crimp Inlet and Outlet w/ (3) 1/2" PEX Crimp Outlet Ports	5.80 [147]	4.40 [112]
QPM443-4	(1) 3/4" PEX Crimp Inlet and Outlet w/ (4) 1/2" PEX Crimp Outlet Ports	7.55 [192]	6.15 [156]

ENGINEERING SPECIFICATION: QPM443

ZurnPEX® QuickSert CR™ Multi-Port tees. The QPM443- Tee is used to supply different fixtures from the main line. Molded from Acudel®. Multi-Port Tees, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. Multi-Port Tees are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5, and ASTM F2159.

ACCESSORIES

- ____ QCLP3X 1/2" QICKCLAMP™ CRIMPRING
- ____ QCLP4X 3/4" QICKCLAMP™ CRIMPRING
- ____ QCR3X 1/2" COPPER CRIMP RING
- ____ QCR4X 3/4" COPPER CRIMP RING

* Regularly furnished unless otherwise specified.