




DZR Brass Elbow MPT x PEX Adapter QQE__BTDZX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

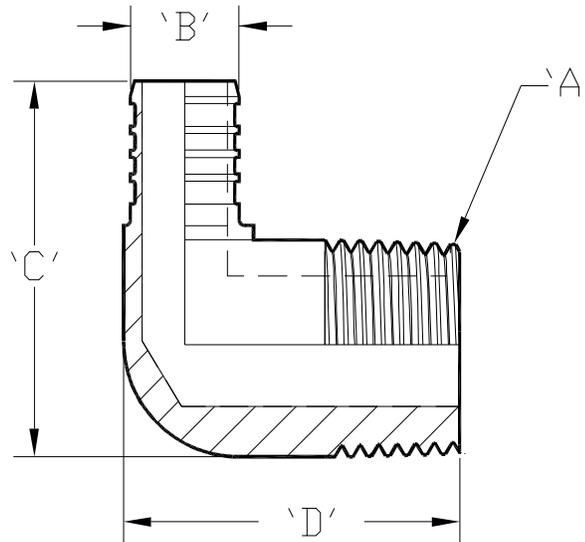

Part Number	Description	'A'	'B'	'C'	'D'
QQE46BTDZX	3/4" Barb x 1-1/4" MPT Elbow	1-1/4 NPT	0.667" [16.9]	2.37" [60.2]	2.85" [72.4]
QQE56BTDZX	1" Barb x 1-1/4" MPT Elbow	1-1/4 NPT	0.856" [21.7]	2.67" [67.8]	3.35" [85.1]
QQE66BTDZX	1-1/4" Barb x 1-1/4" MPT Elbow	1-1/4 NPT	1.045" [26.5]	2.90" [73.7]	3.35" [85.1]

Engineering Specification: ZurnPEX® DZR brass barb x MPT elbow. The QQE__BTDZX is used to make sharp 90° bends from PEX tubing to FPT. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with Zurn PEX® tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

Accessories

- ___ **QCLP4X** 3/4" QuickClamp™ Crimp Ring
- ___ **QCLP5X** 1" QuickClamp™ Crimp Ring
- ___ **QCR4X** 3/4" Copper Crimp Ring
- ___ **QCR5X** 1" Copper Crimp Ring
- ___ **QCR6X** 1-1/4" Copper Crimp Ring

Rev.	Date: 6/20/08	C.N. No.98661
Dwg. No. 83810	Prod. No. QQE__BTDZX	