




# Zurn PEX® XL-Low Lead Brass UL 1821 Listed Plug - QQP5GFX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

Note: Barb geometry will vary depending upon barb size.

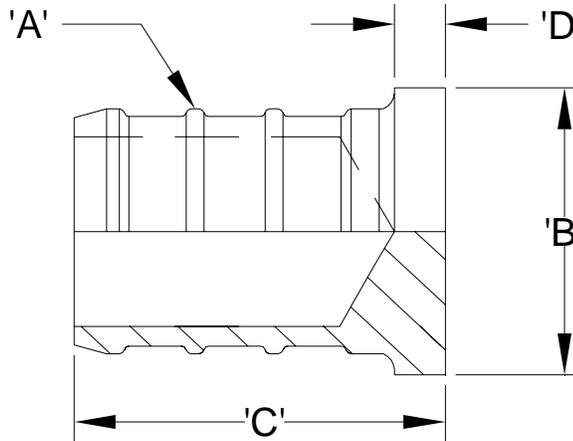

| Part Number | Description  | 'A'     | 'B'          | 'C'          | 'D'         |
|-------------|--------------|---------|--------------|--------------|-------------|
| QQP5GFX     | 1" Barb Plug | 1" Barb | 1.00" [25.4] | 0.92" [23.4] | 0.13" [3.2] |

**Engineering Specification:** Zurn PEX® XL-Low Lead Brass Plug. The QQP5GFX allows for pressure testing of the system or a permanent stop. Manufactured from EcoBrass®. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 130 PSI at 120°F (fire protection rating), 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, ASTM F1807, and UL 1821.

#### Accessories

- **QCLP5X** 1" QuickClamp® Crimp Ring
- **QCR5X** 1" Copper Crimp Ring

|                 |               |                   |
|-----------------|---------------|-------------------|
| Rev.            | Date: 10/8/10 | C.N. No. 111819   |
| Dwg. No. 302760 |               | Prod. No. QQP_GFX |