




# DZR Brass Plug QQP\_DZX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

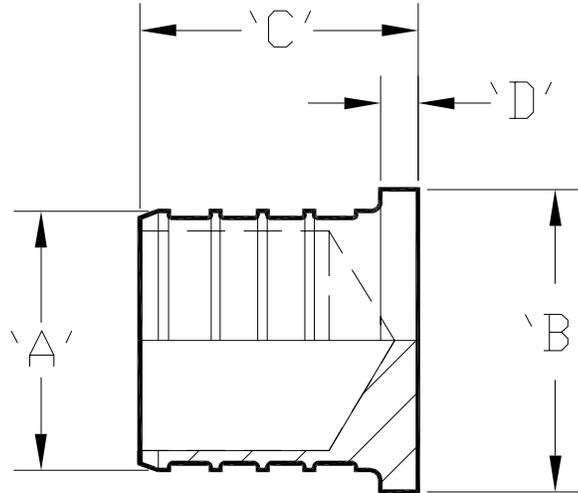

Part Number	Description	'A'	'B'	'C'	'D'
QQP6DZX	1-1/4" Barb Plug	1.045" [26.5]	1.38" [35.1]	1.40" [35.6]	0.25" [6.4]
QQP7DZX	1-1/2" Barb Plug	1.233" [31.3]	1.63" [41.4]	1.40" [35.6]	0.25" [6.4]

**Engineering Specification:** ZurnPEX<sup>®</sup> DZR brass plug. The QQP\_DZX allows for pressure testing of the system. Large diameter fittings are made with dezincification resistant brass. These fittings, as a system with Zurn PEX<sup>®</sup> tubing, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5.

### Accessories

- **QCR6X** 1-1/4" Copper Crimp Ring
- **QCR7X** 1-1/2" Copper Crimp Ring

Rev.	Date: 06/20/08	C.N. No. 98655
Dwg. No. 83806	Prod. No. QQP_DZX	