




Zurn PEX® XL-Low Lead Brass Barb x Female Thread Swivel Adapter - QQSFC_GX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

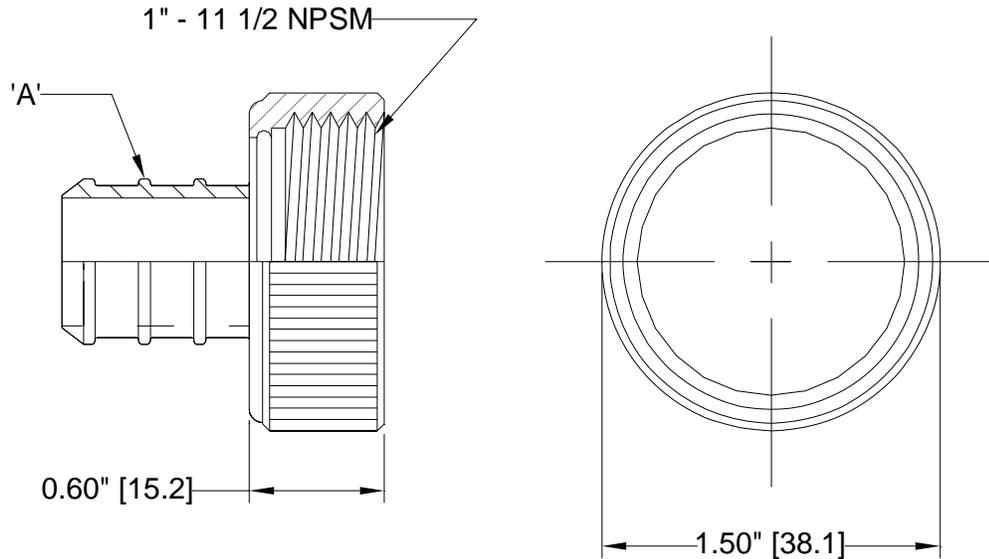

NOTE: Barb geometry will vary depending upon barb size.

Part Number	Description	'A'
QQSFC45GX	3/4" Barb x 1" Female Swivel Adapter	3/4" Barb
QQSFC55GX	1" Barb x 1" Female Swivel Adapter	1" Barb

Engineering Specification: Zurn PEX® XL-Low Lead Brass Barb x Female Thread Swivel Adapter. The QQSFC_GX adapter is used to transition from PEX to 1" male pipe threads, such as on QickPort® manifold inlets and outlets. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61 including Annex G, ASTM F877, CSA B137.5, and ASTM F1807.

Accessories

- ___ QCLP4X 3/4" QickClamp® Crimp Ring
- ___ QCLP5X 1" QickClamp® Crimp Ring
- ___ QCR4X 3/4" Copper Crimp Ring
- ___ QCR5X 1" Copper Crimp Ring
- ___ QSOET4X 3/4" Stainless Steel Crimp Ring
- ___ QSOET5X 1" Stainless Steel Crimp Ring

Rev. A	Date: 2/22/10	C.N. No.110739
Dwg. No. 83979	Prod. No. QQSFC_XG	