




QQZBC_G
Z-Bite™ COUPLING

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

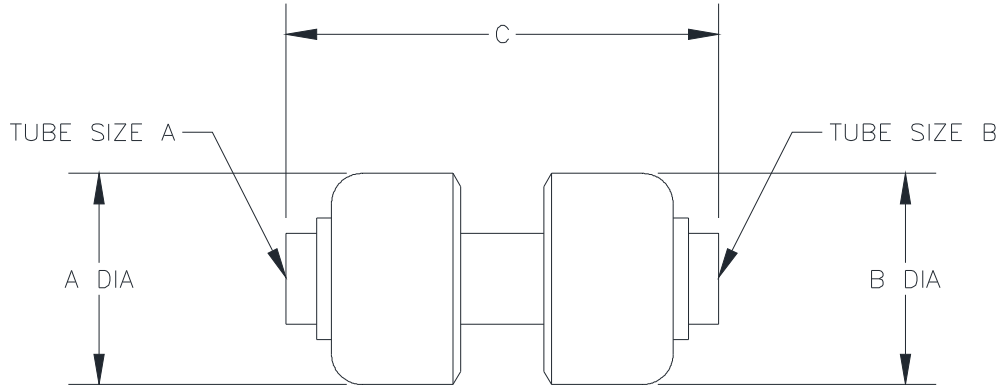

Part Number	Description	Dimensions in Inches [mm]					Bag Qty.	Carton Qty.
		A Dia	Tube A Size	B Dia	Tube B Size	C		
QQZBC22G	Coupling - 3/8 Z-Bite	0.87 [22]	3/8	0.87 [22]	3/8	1.78 [45]	6	150
QQZBC23G	Coupling - 3/8 Z-Bite x 1/2 Z-Bite	0.87 [22]	3/8	1.07 [27]	1/2	1.92 [49]	6	150
QQZBC33G	Coupling - 1/2 Z-Bite	1.07 [27]	1/2	1.07 [27]	1/2	1.94 [49]	12	120
QQZBC43G	Coupling - 3/4 Z-Bite x 1/2 Z-Bite	1.35 [34]	3/4	1.07 [27]	1/2	2.11 [54]	12	60
QQZBC44G	Coupling - 3/4 Z-Bite	1.35 [34]	3/4	1.35 [34]	3/4	2.28 [58]	12	60
QQZBC54G	Coupling - 1 Z-Bite x 3/4 Z-Bite	1.66 [42]	1	1.35 [34]	3/4	2.47 [63]	6	30
QQZBC55G	Coupling - 1 Z-Bite	1.66 [42]	1	1.66 [42]	1	2.55 [65]	6	30

ENGINEERING SPECIFICATION: QQZBC_G

Zurn Z-Bite™ Fittings are certified by IAPMO to meet the requirements of ASSE 1061 for Push Fittings, NSF Standard 61 for potable water applications and NSF Standard 372 for low lead. The fittings may be used with PEX, CPVC or copper tube sizes. The fittings comply with the requirements of the model plumbing codes for use in inaccessible locations. The grip ring is made from Type 304 stainless steel, the o-ring is a chloramine resistant EPDM and the integral tube stiffener for PEX is made from polysulfone. The brass body of the fitting is C46500 alloy.

ACCESSORIES

- ____ QQZBDC2 3/8 Disconnect Clip
- ____ QQZBDC3 1/2 Disconnect Clip
- ____ QQZBDC4 3/4 Disconnect Clip
- ____ QQZBDC5 1 Disconnect Clip
- ____ QQZBDBT Depth Gage & Deburring Tool, 3/8, 1/2, 3/4 & 1

* Regularly furnished unless otherwise specified.