


NOTES:

- UNDER-THE-SINK GREASE INTERCEPTOR.
- FOR GRAVITY FLOW APPLICATIONS ONLY.
- INSTALL IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS.
- Ø 3" NOMINAL POLY PIPE STUB INLET AND OUTLET.
- CONNECT INLET AND OUTLET TO DRAIN PIPING USING FLEXIBLE RUBBER COUPLINGS.
- NON REMOVEABLE BAFFLES.
- COVER NOT LOAD RATED.
- 20 YEAR WARRANTY.
- PATENT: ZURN.COM/PATENTS

Retroceptor Model No.: RC 35


Flow Rate: 2.2 l/s (35 gpm) Inlet Size: 80 mm (NPS-3)

Ext. Flow Control: NO

Containment Cap: 31.8 kg (70 lbs) 

Removal Efficiency: 94%


Access Cover Load: Do Not Step On Cover




Green Turtle Technologies Ltd. CA 877 746 9448

DETAIL "B"


STANDARD: PDI-G 101
 MANUFACTURER: GREEN TURTLE
 MODEL NO.: RC-35
 FLOW RATE: 35 GPM
 GREASE CAPACITY: 70 LBS
 INLET SIZE: 3.5 INCHES





DETAIL "A"

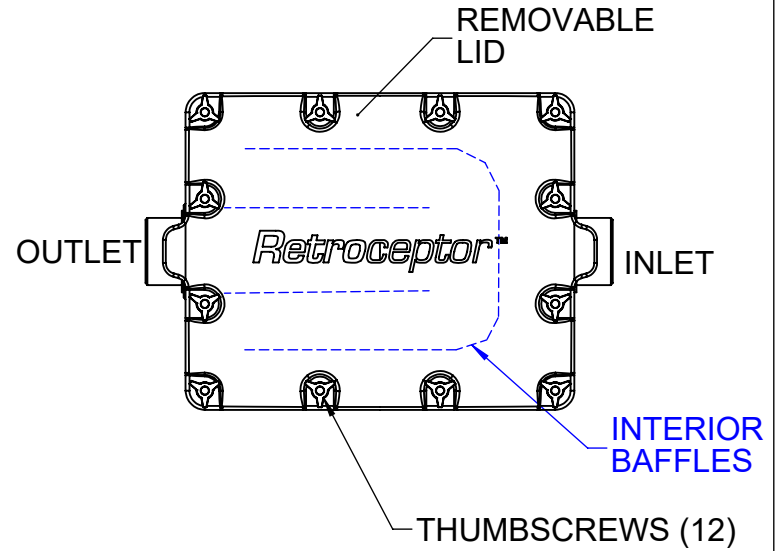

VENTED FLOW CONTROL FOR PDI CERTIFIED INTERCEPTOR MUST BE INSTALLED PRIOR TO THE GREASE INTERCEPTOR IN THE WASTE LINE BEYOND THE LAST CONNECTION FROM THE FIXTURE AND AS CLOSE AS POSSIBLE TO THE UNDERSIDE OF THE LOWEST FIXTURE

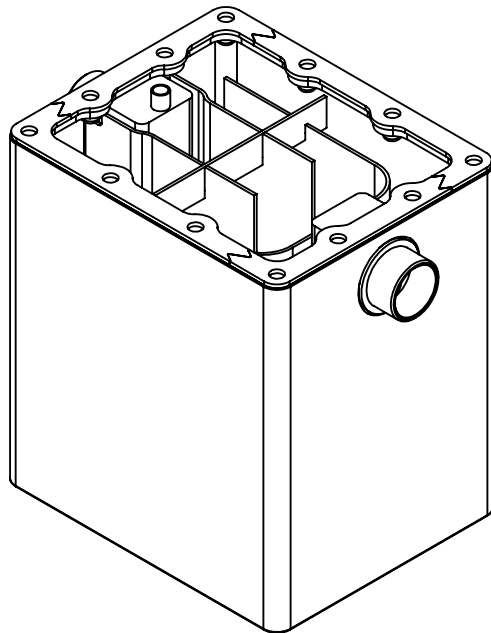

BOX WITH LID OFF

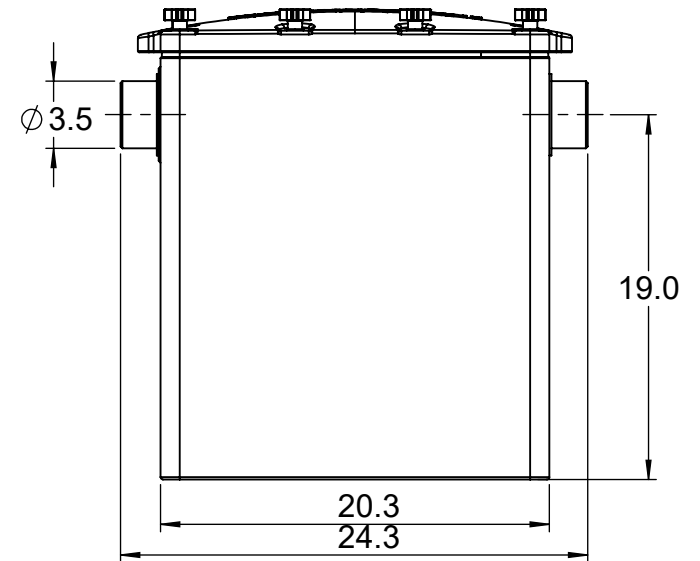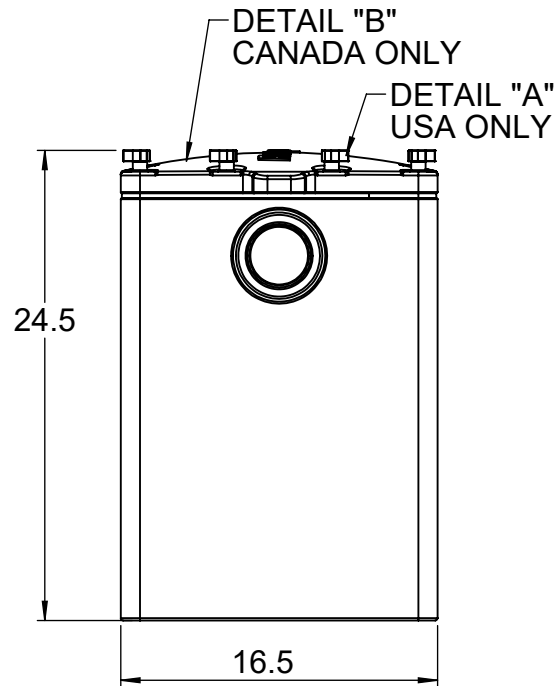

ALL DIMENSIONS IN INCHES

MATERIAL:	Proprietary Polymer
WEIGHT [lb]:	35
DO NOT SCALE DRAWING	

NAME	DATE	TITLE:
LS	8DEC10	RC 35 Retroceptor
CHECKED		

DWG. NO:	REV:
GT0181	4
SHEET 1 OF 1	SIZE:
SCALE: 1:150	A



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF GREEN TURTLE TECHNOLOGIES Ltd. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF GREEN TURTLE TECHNOLOGIES Ltd. IS PROHIBITED.