Architectural/Engineering Specification:

• Heavy-duty stainless steel construction of 16 and 18 gauge, type 304
• Hand-free sensor faucet and mixing valve
• Manual soap dispenser
• Manual towel dispenser
• Large capacity wash basin (ID: 16"W x 22"L x 5"D)
• Offset drain location rear corner to reduce aerosolization
• Heavy-duty handle for easy portability
• Lockable access door

Product Features:

• Hands-free faucet
• Hose bib economy unit
• Indoor/Outdoor use
• ADA Compliant - side reach
• Portable micro cart
• Optional CuVerro® antimicrobial copper-nickel surface sink

Note: Minor assembly of accessories required
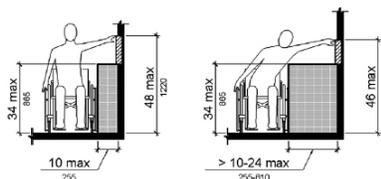
Compliance and Certification:

• Lead Free Compliant: Zurn Lead Free products (-XL) are manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

• ADA Compliant

• Unit components are NSF, CSA, UL, or equal approved

• Faucet meets ASME A112.18.1/CSA B125.1

Product Options:

CuVerro® antimicrobial copper-nickel surface sink

*This device is WaterSense labeled when used with the appropriate flow rate and certified for residential and private restrooms.

ADA: Unobstructed side reach
https://www.ada.gov/regs2010/2010ADA-Standards/2010ADAstandards.htm#c3

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541
In Canada: **ZURN INDUSTRIES LIMITED** 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292

Rev. A   Date: 01/11/21   C.N. No. 143340   Prod. | Dwg. No. SS HYG1ECO   **US** 1.855.ONE.ZURN **CANADA** 1.905.405.8272 ZURN.COM

Fittings Package:

Z6913 Faucet:
Architectural/Engineering Specification:
AquaSense® faucets are ideal for high-use applications where durability and hands-free operation are necessary. ADA compliant, battery powered, polished chrome-plated cast brass sensor faucet with infrared proximity sensor for retrofit and new construction. Unit is furnished with a standard .5 GPM aerator, and mounting hardware. Zurn® Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface. Product features include: an infrared convergence-type proximity sensor, 30 second time out feature, chrome-plated cast brass body, in-line filter, four "AA" batteries, and an inlet for a 1/2" ball riser.

JCF-200 Paper Towel Dispenser surface-mount:
Paper towel dispenser-surface mount. Cabinet and door of type 304,18-8 stainless steel. Full-length piano hinge secures door to cabinet. All spotwelded construction. Exposed surfaces to have a brush fi nish. Keyed tumbler lock to secure cabinet. Sides slotted to monitor supply without opening door. Capacity (200) C-fold or (275) multi-fold towels measuring 3-1/8" to 3-13/16". ADA compliant when properly mounted to meet ADA requirements. Paper towels not included.

JSD-40 Liquid Manual Soap Dispenser:
This soap dispenser is composed of two tone black and grey high-impact-resistant ABS material. The dispenser includes a push button spout to go along with a vandal resistant lid with keyless locking. Other features include: a translucent container providing a visible soap level, 40-fl-oz (1.2L) capacity, and concealed wall/mirror mounting

P6900-TMV-1-XL Thermostatic Mixing Valve:
Ideal for use where Lead Free* valves are required. The Zurn® Aqua-Gard® Thermostatic mixing valve is designed to be installed at the point of use under sinks and sensor faucets to assist in the prevention of scalding. The valves rapid response and precise temperature control meet the stringent standards of ASSE 1070 listed for fixtures, sinks, lavatories or bathtubs. The P6900-TMV-1-XL will mix hot and cold water from the distribution system to a final safer temperature outlet range of 95-115F (35-46C). The 3/8" compression fittings make this valve ideal for residential and commercial applications.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541
In Canada: **ZURN INDUSTRIES LIMITED** 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292

Rev. A   Date: 01/11/21   C.N. No. 143340   Prod. | Dwg. No. SS HYG1ECO   **US** 1.855.ONE.ZURN **CANADA** 1.905.405.8272 ZURN.COM

27
[685.8]

23
[584.2]

45 — 3/4
[1162.1]

PUSH/PULL
HANDLE

11 — 3/4
[298.5]

34
[863.6]

5
[127.0]

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541
In Canada: **ZURN INDUSTRIES LIMITED** 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292
Rev. A   Date: 01/11/21   C.N. No. 143340   Prod. | Dwg. No. SS HYG1ECO

US 1.855.ONE.ZURN **CANADA** 1.905.405.8272 ZURN.COM