Z.WC4.AS.TM

ARCHITECTURAL & ENGINEERING SPECIFICATION

Complete EcoVantage* high efficiency 1.28 gpf sensor actuated, battery powered, floor mounted commercial water closet system with ZER6000AV-HET-TM exposed, sensor activated with manual override button chrome-plated closet diaphragm flushometer for either left or right hand supply, Z5955SS-EL open front commercial toilet seat and Z5665- BWL1 floor mounted ADA height vitreous china water closet with Z5972-COMB closet flange outlet gasket assembly kit manufactured by Zurn.

PRODUCT FEATURES

- 1.28 gpf (gallons per flush)
- Floor mounted elongated front rim top spud toilet
- · High efficiency siphon jet flush action
- 2-1/8" fully glazed trapway
- · Shipping weight: 65 lbs
- · ADA height bowl
- · Vitreous china wall bowl construction
- Diaphragm- type flushometer complete with Zurn's Go Blue® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered by-pass
- · Manual override button
- High pressure vacuum breaker
- · Adjustable tailpiece
- Control stop with internal siphon guard protection, vandal resistant cap, sweat solder kit and cast wall flange with set screw
- Open front, elongated, white commercial toilet seat with SS check hinges
- 20% water savings over standard 1.6 gpf system

COMPLIANCE AND CERTIFICATION:

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

- Fixture Complies with ASME A112.19.2 / CSA B45.1
- Flush Valve Complies with ASSE 1037 / ASME A112.1037 / CSA B125.37



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.



ZURN ONE SYSTEM PACKOUT INCLUDES:

FIXTURE- Z5665-BWL1:

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency, ADA, floor mounted, bottom outlet toilet with siphon jet flushing action and elongated front rim with 1-1/2" [39mm] top spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush

FLUSH VALVE- ZER6000AV-HET-TM:

The ZER EZ gear-driven water closet flush valve is performance engineered with the dual action of the ceramic disc cartridge and motor gear-driven operation. Its polished chrome-plated finish, modern top-mount design, and quiet diaphragm operation are ideal for new and retrofit commercial restroom applications

Z5955SS-EL:

Elongated, open front white toilet seat with stainless steel check hinges

Z5972-COMB:

Closet bolt/wax ring kit

ARCHITECTURAL & ENGINEERING APPROVAL


The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.




Z.WC4.AS.TM

TAG _

Rough-in/Overview dimensions



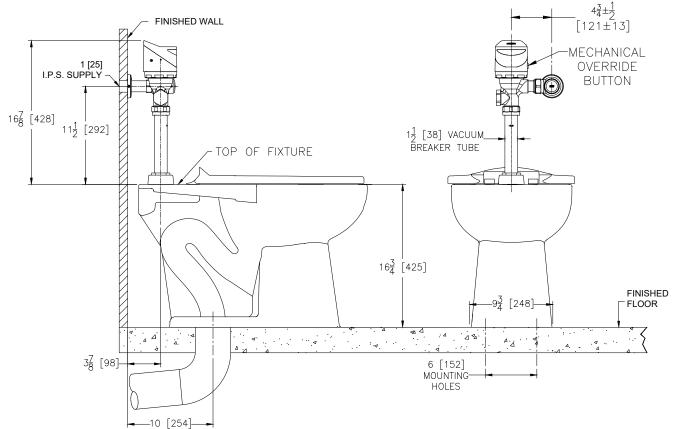

Rev. B | Date: 10/22/24 | C.N. No. 146387 | Prod./Dwg. No. SS Z.WC4.AS.TM