



ARCHITECTURAL & ENGINEERING SPECIFICATION

Z5615-BWL

EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action, elongated front rim with 1-1/2" [39mm] top spud. Universal high efficiency toilet is designed to exceed industry standards with flush volumes of 1.1 gallons per flush.

Z5615-BWL-AM

EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze and elongated front rim with 1-1/2" [39mm] top spud. Universal high efficiency toilet is designed to exceed industry standards with flush volumes of 1.1 gallons per flush.

Z5616-BWL

EcoVantage High Efficiency Toilet System

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze and elongated front rim with integral bedpan lugs 1-1/2" [39mm] top spud. Universal high efficiency toilet is designed to exceed industry standards with flush volumes of 1.1 gallons per flush.

PRODUCT FEATURES

Z5615 HET Series

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards, while using as little as 1.1 gallons of water per flush
  - Universal high efficiency toilet can be specified with 1.1 gpf [4.2 Lpf], 1.28 gpf [4.8 Lpf], 1.6 gpf [6.0 Lpf] or dual flush valves
  - Vitreous china
  - ZurnSHIELD™ ceramic glaze creates a permanent surface that protects the fixture by inhibiting the growth of stain and odor causing mold, mildew, and bacteria, thus reducing the amount of time, chemicals and water needed to clean the bowl
  - Elongated front rim
  - 2-1/8" [54mm] fully glazed trapway
  - High efficiency siphon jet flush action
  - Shipping Weight: 40 lbs
  - System MaP score of 1,000 grams at 1.28 gpf with Zurn Flush Valve
  - Static weight load of 1,000 lbs\*
- \*Not intended for bariatric use

COMPLIANCE AND CERTIFICATION:

- Complies with ASME A112.19.2 / CSA B45.1



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

NOTE: To ensure system performance:  
Minimum Running Water Pressure = 25 psi.



VARIANT OPTIONS

- Z5615-BWL Z5615 Series Top spud toilet
- Z5615-BWL-AM Z5615 Series top spud toilet with ZurnSHIELD™ glaze
- Z5616-BWL Z5615 Series top spud toilet with Top Spud Toilet with integral bed pan lugs and ZurnSHIELD™ glaze

Z5615-BWL SERIES ACCESSORIES

- Z5610-NUT-EXT-KIT Retrofit nut kit for extending carrier studs from existing wall

RECOMMENDED CARRIER

- Z1201 or Z1202 EZCarry™ 500 lbs load rated High Efficiency Carrier

Z5615-BWL ZURN ONE SYSTEMS


Complete fixture package with bowl, flush valve, seat and trim

ITEM NUMBER	DESCRIPTION	FLUSH VOLUME GPF
Z.WC1.M	Manual Z6000AV-ONE system	1.1
Z.WC1.S	EZ Flush ZER6000AV-ONE-SM system	1.1
Z.WC1.S.TM	Top Mount Sensor ZER6000AV-ONE system	1.1
Z.WC2.M	Manual Z6000AV-HET system	1.28
Z.WC2.S	EZ Flush ZER6000AV-HET-SM system	1.28
Z.WC2.S.TM	Top Mount Sensor ZER6000AV-HET system	1.28

ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in/Overview dimensions

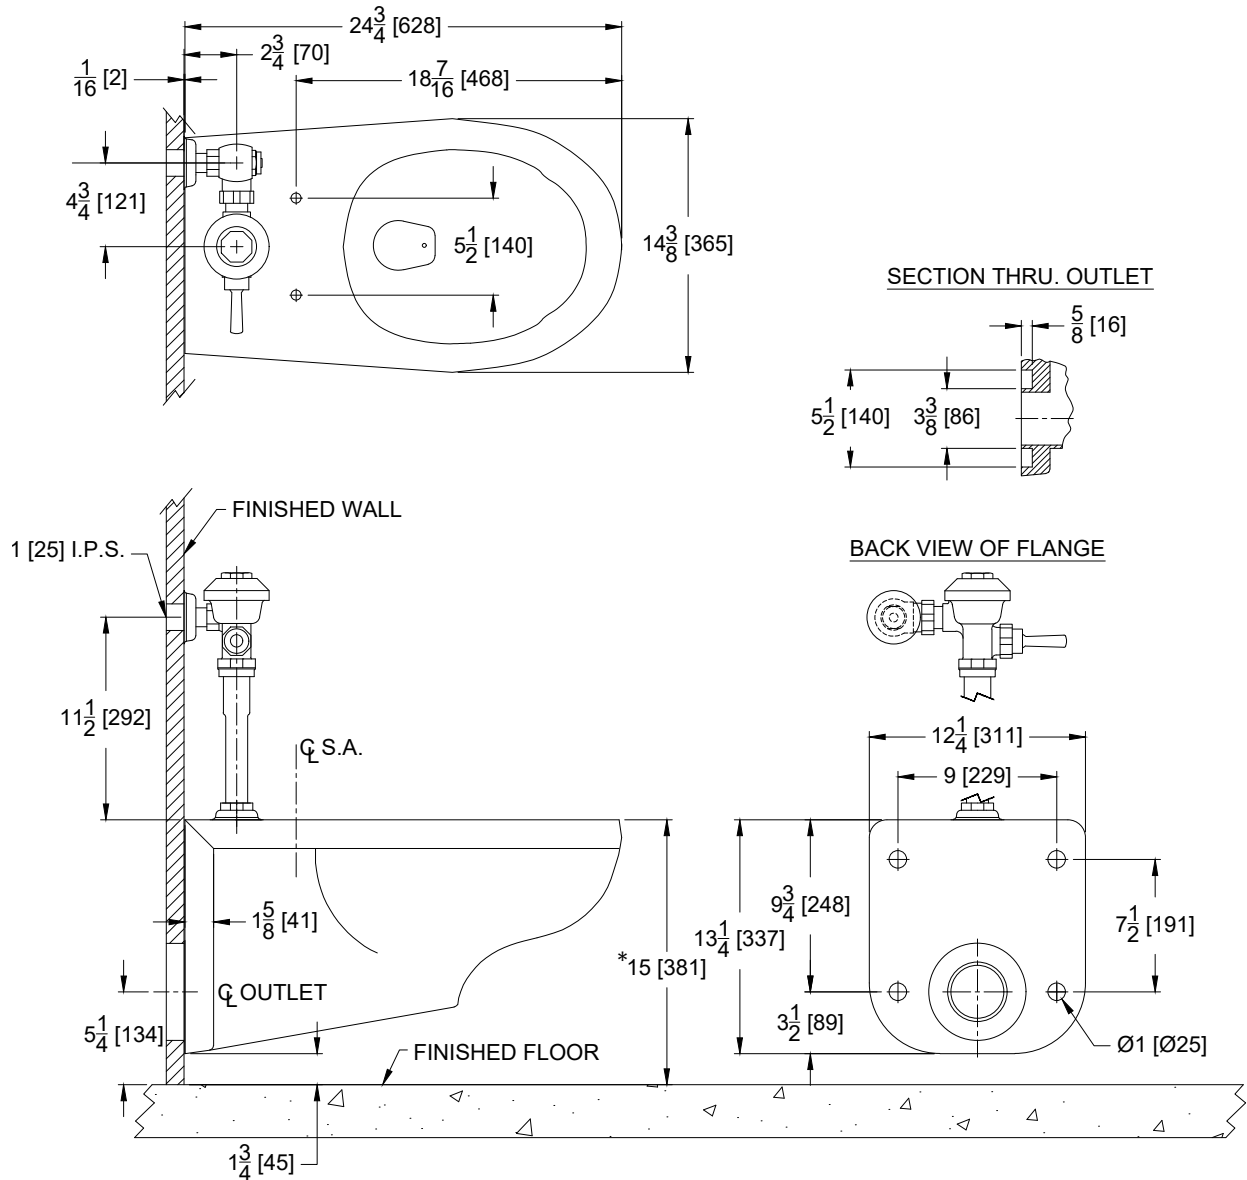

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

\*NOTE: For ADA compliance, top of seat height should be installed at 17" [431mm] - 19" [482mm] from finished floor.