



HET ELONGATED, ADA HEIGHT, FLOOR MOUNTED BACK OUTLET ECOVANTAGE®  
 FLUSH VALVE TOILET WITH ZURNSHIELD™ GLAZE  
**Z5645-BWL**

TAG \_\_\_\_\_

**ARCHITECTURAL & ENGINEERING SPECIFICATION**

Vitreous china, 1.1 gpf [4.16 Lpf] or greater, high efficiency, floor mounted back outlet toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze, elongated front rim, ADA compliant rim height, 1-1/2" [39mm] top spud inlet connection and 4-1/8" [105mm] back outlet rough-in height. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush, engineered to provide optimal performance.

**PRODUCT FEATURES**

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards while using as little as 1.1 gallons of water per flush
- Universal high efficiency toilet can be specified with 1.28gpf [4.8 lpf], 1.6 gpf [6.0 lpf] or dual flush valves
- Vitreous china
- ZurnSHIELD™ ceramic glaze creates a permanent surface that protects the fixture by inhibiting the growth of stain and odor causing mold, mildew, and bacteria, thus reducing the amount of time, chemicals and water needed to clean the bowl
- 4-1/8" [105mm] Back Outlet Rough-in
- Elongated front rim
- ADA Compliant rim height
- 2-1/8" [54mm] fully glazed trapway
- High efficiency siphon jet flush action
- Includes bolt caps
- Shipping Weight: 65 lbs

**COMPLIANCE AND CERTIFICATION:**

- Complies with ASME A112.19.2 / CSA B45.1
- ADA Compliant

NOTE: To ensure system performance:  
 Minimum Running Water Pressure = 25 psi.



**VARIANT OPTIONS**

- Z5645-BWL Z5645 Series top spud toilet
- Z5646-BWL Z5646 Series top spud toilet with integral bedpan lugs


**RECOMMENDED TRIM**

- Z5955SS-EL Elongated, standard white, open front toilet seat less cover with stainless steel check hinge

ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in/Overview dimensions

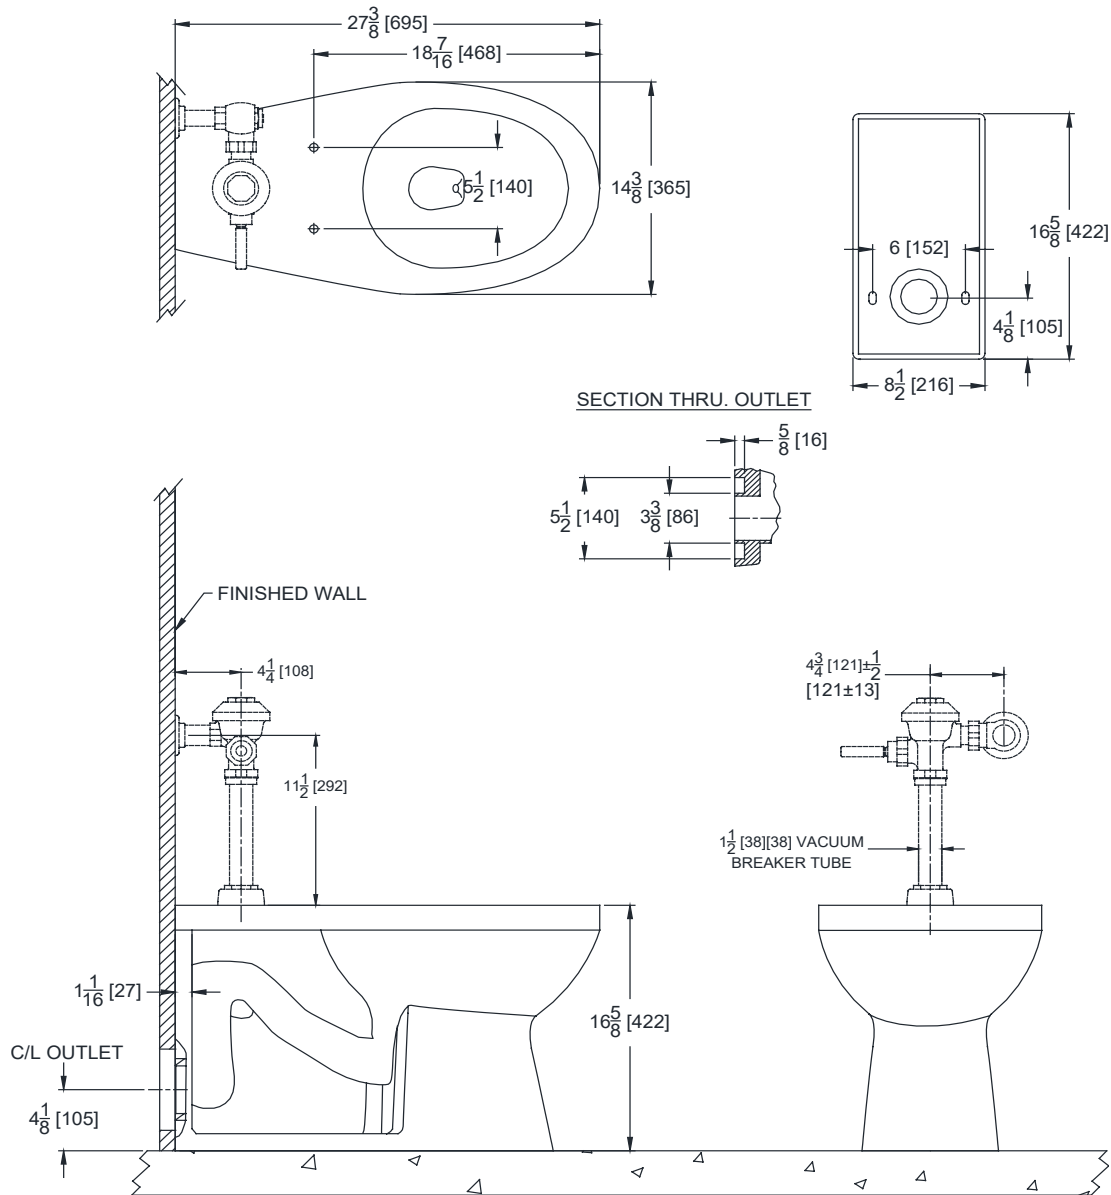

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.