



Z1202-1N_4

EZCARRY® ADJUSTABLE VERTICAL HIGH
PERFORMANCE SIPHON JET NO-HUB
WATER CLOSET CARRIER SYSTEM W/ SIDE INLET


SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Z1202-1NR4 Illustrated

Product Number	Approx. Wt. lbs [kg]
Z1202-1NL4	77 [35]
Z1202-1NR4	

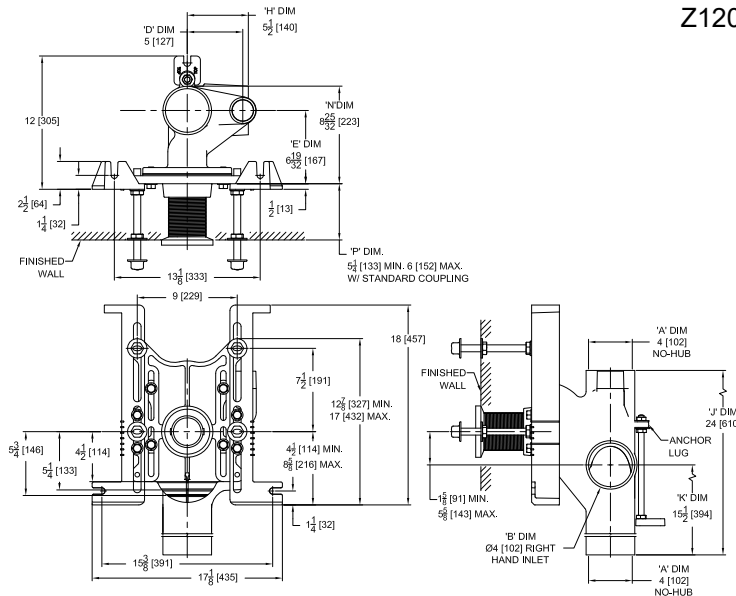

Note:

1. Z coupling, Min. 'P' Dim. Obtainable = 2 [51].
ZQ coupling, Min. 'P' Dim. Obtainable = 5 [127]
EZ-Set™ Coupling, Min. 'P' Dim. Obtainable = 4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT
2. Feet bolted to floor using min. 1/2 [13] dia. anchors
3. Rear anchor foot required for secure installation.
4. 2 [51] No-Hub Vent located on same side as 4 [102] side inlet.

ENGINEERING SPECIFICATION: ZURN Z1202-1N_4

EZCarry® vertical siphon jet water closet carrier system with high performance waterway and 4" [102mm] no-hub connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, 4" [102mm] side inlet, adjustable gasketed faceplate, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, heavy-duty 1/2" [13mm] rear anchor tie down, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

OPTIONS (Check/specify appropriate options)

- ____ Z1202-1NL4 4 [102] No-Hub Stack, Single Inlet, 4 [102] Left Hand Side Inlet, 2 [51] Left Hand Vent
____ Z1202-1NR4 4 [102] No-Hub Stack, Single Inlet, 4 [102] Right Hand Side Inlet, 2 [51] Right Hand Vent

PREFIXES

- ____ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*
____ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- | | | | |
|----------|--|-------------|---|
| ____ -A | Auxiliary Support Assembly
(For 'P' Dim. Greater than 18 [457]) | ____ -G | Galvanized Cast Iron |
| ____ -CC | Corrosion Resistant Cast Iron Coupling
(2-1/4 [57] to 12 [305]) | ____ -M | Auxiliary Foot Support
(for 'P' Dim. 7 thru 18 [178 thru 457]) |
| ____ -CE | EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom)
(NPT 12 [305] or custom) | ____ -RYK17 | One Piece Unistrut Pre-Fab Foot |
| ____ -CL | Custom Length Standard Coupling with Integral Test Cap
(Specify Length 4, 8, 10, 12 [102, 203, 254, 305]) | ____ -VL | Left Hand Vent Connection |
| ____ -CS | 2-1/4 [57] Polymer Coupling with Integral Test Cap | ____ -VP | Vandal-Proof Trim |
| ____ -F | Mounted, Back Outlet Fixture Support | ____ -X2 | 2 [51] Carrier Foot Extension Assembly |
| | | ____ -X3 | 3 [76] Carrier Foot Extension Assembly |
| | | ____ -45 | Finishing Frame for Siphon Jet System |
| | | ____ -50 | Flush Valve Supply Support for Water Closets |

* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. H
Date: 12/27/22
C.N. No. 144897
Patent zurn.com/patents
Prod. | Dwg. No. Z1202-1N_4