




Z150F-DR

FLOFORCE® HIGH PERFORMANCE PROMENADE DECK DRAIN WITH TOP-SET® DRAIN RISER, ROTATABLE FRAME, AND HEEL-PROOF GRATE

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

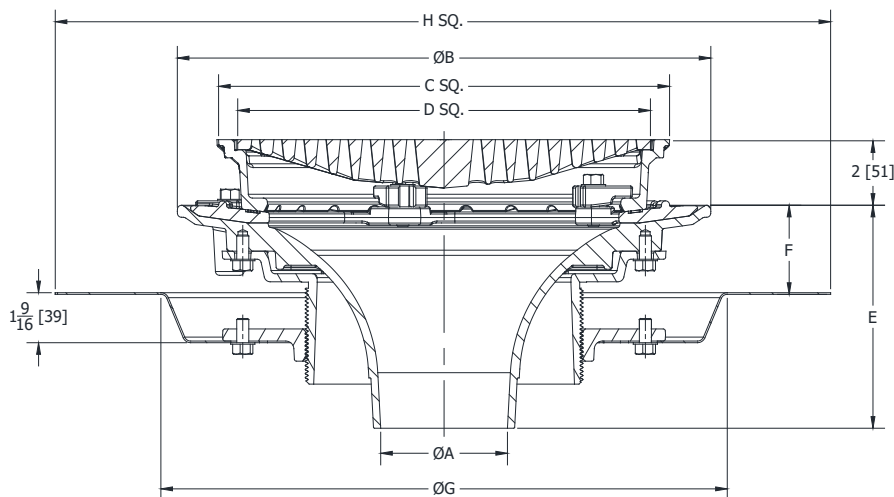

4 [102] No-Hub Illustrated

A Outlet Size In. [mm]	B Body Diameter In [mm]	C Frame Size In [mm]	D Grate Size In [mm]	F In [mm]		G In [mm]	H In [mm]	Weight lbs [kg]	Grate Open Area Sq. In. [cm2]
				Min	Max				
2,3,4 [51,76,102]	16-9/16 [421]	14 [356]	12-13/16 [325]	1-7/16 [37]	7-1/2 [191]	17 [432]	24 [610]	92 [42]	44 [284]
6,8 [152, 203]	20-3/32 [510]	18 [457]	16-13/16 [427]			21 [533]	30 [762]	144 [65]	70 [452]

ENGINEERING SPECIFICATION: ZURN Z150F-DR

FLOFORCE® High efficient flow performing roof drain for promenade deck roof drain applications. Drain incorporates a smooth funnel-shaped interior surface, providing a seamless transition to outlet connection and eliminating internal obstructions within the body. Complete with Dura-Coated cast iron body with Top-Set® drain riser, drain riser flange, Top-Set® deck plate, membrane flashing clamp, rotatable square promenade frame, seepage openings, securing clamps, and heavy-duty ductile iron heel-proof grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2, 3, 4 [51, 76, 102]
 6, 8 [152, 203]
 2, 3, 4 [51, 76, 102]
 6 [152]
 2, 3, 4 [51, 76, 102]
 6, 8 [152, 203]
 3, 4 [76, 102]
 6 [152]

(Specify size/type) OUTLET

____ NH No-Hub
 ____ NH No-Hub
 ____ NL Neo-Loc
 ____ NL Neo-Loc
 ____ IP Threaded
 ____ IP Threaded
 ____ IC Inside Caulk
 ____ IC Inside Caulk

E BODY HT. DIM.

6-15/16 [176]
 7-7/16 [189]
 7-3/8 [187]
 8-1/32 [204]
 5-15/16, 6-3/16, 6-5/16 [151, 157, 160]
 6-11/16, 6-3/4 [170, 171]
 5-13/16 [148]
 6-1/16 [154]

PREFIXES

____ Z D.C.C.I. Body and Frame with Ductile Iron Grate*
 ____ ZN D.C.C.I. Body and Frame with Ductile Iron Grate and Polished Nickel Bronze Veneer Finish

SUFFIXES

____ -AR Acid Resistant Epoxy Coated	____ -SC Secondary Clamp Collar
____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)	____ -TC Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
____ -EA Adjustable Extension Assembly 2-1/8 [54] thru 3-1/2 [89]	____ -VP Vandal-Proof Secured Top
____ -G Galvanized Cast Iron	____ -Y Type 304 [CF8] SS Sediment Bucket
____ -PD Low-Profile Pedestal Paver Dome	____ -85 Type 304 [CF8] Stainless Steel Perforated Extension
	____ -89 2 [51] High Overflow Dam and Low-Profile Pedestal Paver Dome

* Regularly furnished unless otherwise specified

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. A
 Date: 09/21/2023
 C.N. No. 145522
 Patent zurn.com/patents
 Prod. | Dwg. No. Z150F-DR FLOFORCE® Page 1 of 1