

Z1830-8B

8 [203] DIAMETER ROUND INDUSTRIAL FLOOR **DRAIN WITH DEEP BODY**

SF	PECI	FIC	ATIO	N S	HEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Engineering Specification: ZURN Z1830-8B

8 [203] Diameter x 8 [203] deep, 18 gage, all type 304 (CF8) stainless steel round industrial floor drain with loose set anti-tilt heavy-duty perimeter drainage cover, reinforced top frame, perforated removable sediment bucket with lift handle, pre-sloped bottom sump, and pre-pour stabilizing anchor tabs.

Approx.	Grate Open	
Wt.	Area	
Lbs. [kg]	Sq. In. [cm ²]	
8 [4]	6.1 [39]	

Options (Check/specify appropriate options)

Pipe Size (ØA)	(Specify size/type) Outlet
2-3-4[51-76-102]	BW Butt-Weld (Sch. 10)
2-3-4[51-76-102]	NH No-Hub

Prefixes


Z	Type 304 (CF8) Stainless Steel Body*
ZM	Type 316 (CF8M) Stainless Steel Body

Suffixes

B	Bell Trap/Solid Sediment Bucket
KC	Anchor Flange w/Seepage Holes
	and Clamp Collar
P	ø1/2 [13] Trap Primer Connection
SA	Stabilizer Assembly (Z1035)
SQ	Stabilizer Q-Deck (Z1035-Q)
TS	Top Secured Grate
VH	Vacuum Handle (-GCH Cover Only)
2PT	2 [51] Stainless Steel P-Trap
3PT	3 [76] Stainless Steel P-Trap
-4PT	4 [102] Stainless Steel P-Trap

Grate Options

GCH	Heavy-Duty Gas Tight Solid Cover
PCX	Extra-Heavy-Duty Perimeter Drainage Co
	(6.1 Sq. In. [39 cm ²] Open Area)
PGM	Medium-Duty Perforated Grate
	(9.9 Sq. In. [64 cm ²] Open Area)
SGH	Heavy-Duty Slotted Grate
	(11.2 Sq. In. [72 cm ²] Open Area)
SGM	Medium-Duty Slotted Grate
	(11.2 Sq. In. [72 cm ²] Open Area)

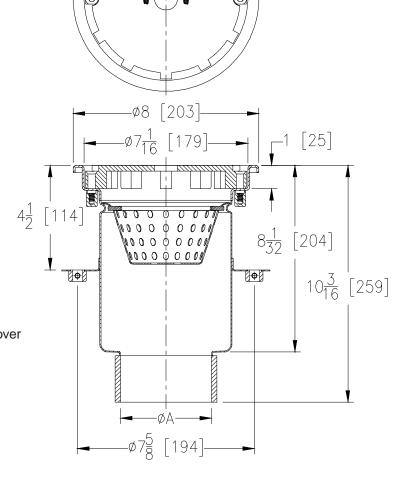

^{*} Regularly furnished unless otherwise specified.