




1.0 GPM LAMINAR FLOW OUTLETS

G67816 (21F)


G67814 (21M)

TAG _____

Engineering Specifications: Zurn AquaSpec® G67816 (21F), G67814 (21M)
1.0 GPM (3.8 L) Laminar Flow Outlet (Complying with ASME A112.18.1/CSA B125.1).



**G67816
(21F)**
3/4-27 Female



**G67814
(21M)**
13/16-27 Male

Technical Data:

Material: Housing- Chrome Plated Brass


Body- Acetal Copolymer

Washer- EPDM

Max Working Temperature: 150°F (66°C)

Max Working Pressure: 125 psi (860 kPa)

FLOW RATE CURVE

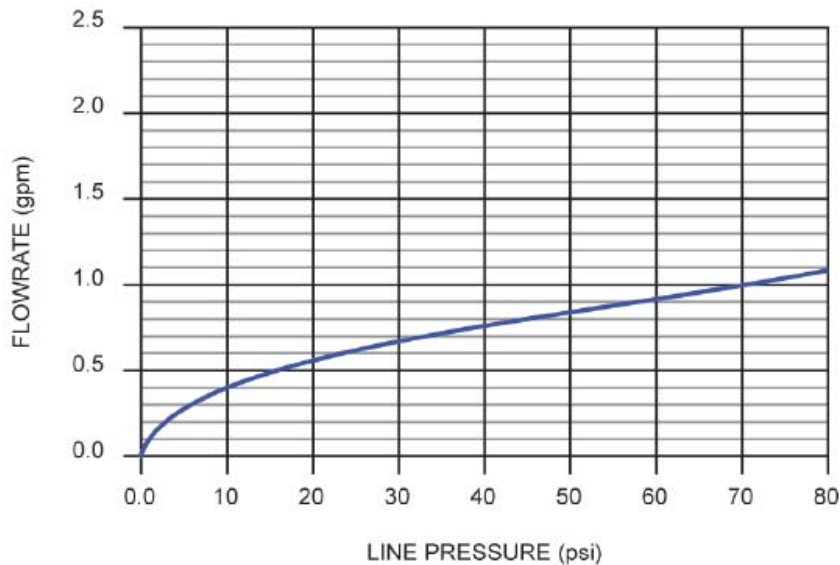

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292