



Model FP53 Tees

Application

Zurn tees provide branch connections for 1" through 10" grooved pipe. Short patterned options and reducing branches are available.

Materials

Casting ASTM A536 65-45-12 Ductile Iron

Standards Compliance

UL® Listed

C-UL® Listed

FM® Approved

Features


Maximum Pressure:

1 1/4" – 4" Tees 400 PSI

6" – 10" Tees 300 PSI

Options

- S - Short Pattern Radius
- GALV - With Hot Dipped Galvanized Coating

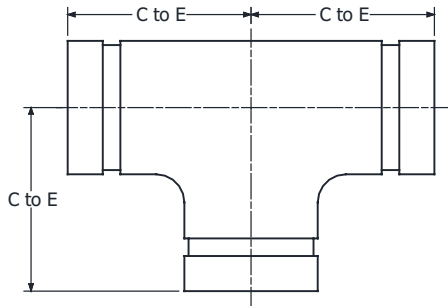

4-FP53



4-FP53S

Dimensions & Weights (do not include pkg.)

SIZE in.	MODEL	DIMENSIONS (approximate)			
		FP53		FP53S	
		C to E in.	Weight lb.	C to E in.	Weight lb.
1 1/4	114-FP53(S)	2.76	1.6	2.36	1.1
1 1/2	112-FP53(S)	2.76	1.8	2.36	1.4
2	2-FP53(S)	3.27	2.6	2.76	2.0
2 1/2	212-FP53(S)	3.74	3.8	2.99	2.9
3	3-FP53(S)	4.25	6.4	3.39	4.0
4	4-FP53(S)	5.00	8.9	4.00	5.8
6	6-FP53(S)	6.50	18.6	5.51	14.4
8	8-FP53(S)	7.76	35.5	6.89	27.6
10	10-FP53	9.02	47.6	N/A	N/A




Model FP53

Reducing Tees (UL/FM Model No. FP53R)



212X1-FP53

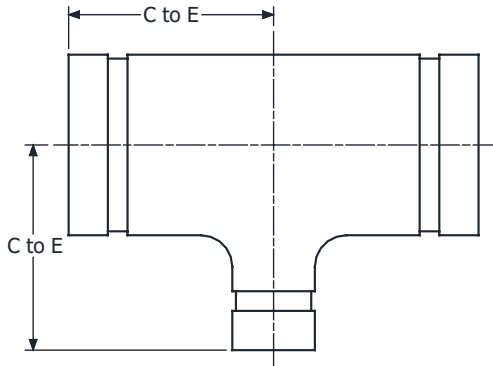

Dimensions & Weights (do not include pkg.)

SIZE in.	MODEL	DIMENSIONS (approximate)	
		C to E in.	Weight lb.
2 1/2 X 2	212X2-FP53	3.00	2.5
3 X 1	3X1-FP53	3.38	3.9
3 X 2	3X2-FP53	3.38	3.7
3 X 2 1/2	3X212-FP53	3.38	3.9
4 X 2	4X2-FP53	4.00	5.4
4 X 2 1/2	4X212-FP53	4.00	6.2
4 X 3	4X3-FP53	4.00	5.6
6 X 2	6X2-FP53	5.60	13.9
6 X 2 1/2	6X212-FP53	5.60	13.7
6 X 3	6X3-FP53	5.60	13.0
6 X 4	6X4-FP53	5.60	12.9
8 X 4	8X4-FP53	7.05	24.5
8 X 6	8X6-FP53	7.05	25.7