




Model FP8 Grooved Flanges



6-FP8

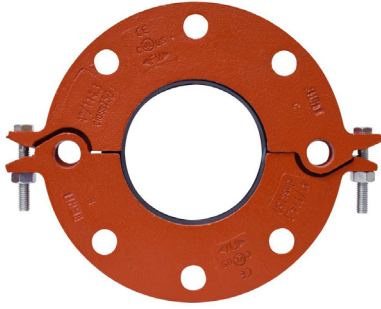

Application

FP8 Zurn Grooved Flanges convert flanged piping connections to standard grooved.

Material

Casting ASTM A536 65-45-12 Ductile Iron
Gasket EPDM

Standards Compliance


- UL® Listed
- C-UL® Listed
- FM® Approved

Features

Sizes: 2", 2-1/2", 3", 4", 6", 8", 10"
Maximum Pressure:
2" - 8" 300 PSI
10" 175 PSI
Class 150 Bolt Pattern

Options:

- GALV - With Hot Dipped Galvanized Coating

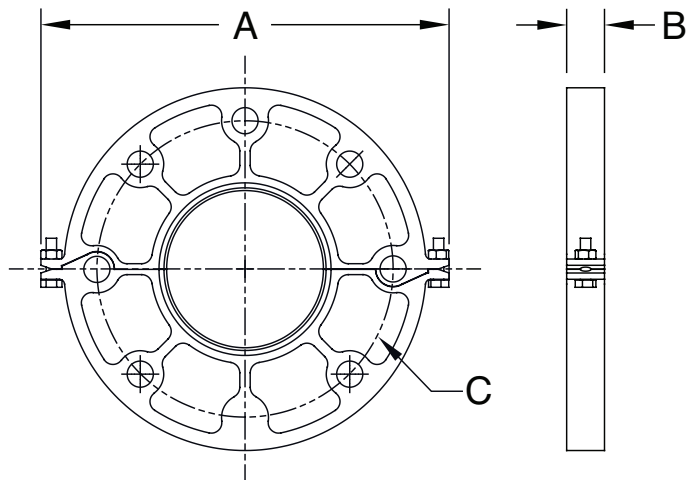

Dimensions & Weights (do not include pkg.)

SIZE in.	MODEL	DIMENSIONS (approximate)			
		A in.	B in.	C in.	Weight lbs.
2	2-FP8	8.74	0.91	6.50	3.8
2 1/2	212-FP8	9.45	0.91	7.28	4.2
3	3-FP8	9.92	0.91	7.56	5.5
4	4-FP8	9.76	0.91	8.66	6.2
6	6-FP8	13.62	0.94	11.22	8.7
8	8-FP8	16.46	1.10	13.38	14.3
10	10-FP8	20.00	1.20	16.02	24.0