




# Z1201-H\_4

EZCARRY<sup>®</sup> ADJUSTABLE HORIZONTAL HIGH PERFORMANCE SIPHON JET HUB AND SPIGOT WATER CLOSET CARRIER SYSTEM

Design and Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

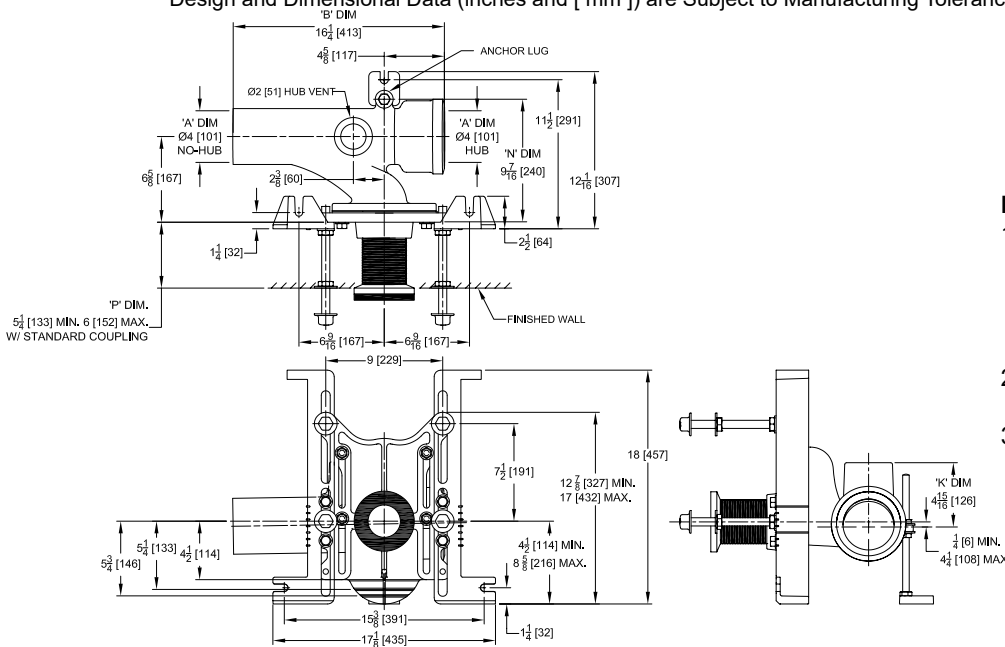

Product Number	Approx. Wt. lbs [kg]
Z1201-HL4	64 [29]
Z1201-HR4	

**Note:**

- Z coupling, Min. 'P' Dim. Obtainable=2 [51]. EZ-Set<sup>™</sup> Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
- Feet bolted to floor using min. 1/2 [13] dia. anchors.
- Rear anchor foot required for secure installation.

**Z1201-HR4 Illustrated****ENGINEERING SPECIFICATION: ZURN Z1201-H\_4**

EZCarry<sup>®</sup> horizontal siphon jet water closet carrier system with high performance waterway and 4" [102mm] hub and spigot connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, adjustable faceplate, QuickFit<sup>™</sup> faceplate gasket, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, heavy-duty 1/2" [13mm] rear anchor tie down, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry<sup>®</sup> system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

**OPTIONS** (Check/specify appropriate options)

_____ Z1201-HL4	4 [102] Hub and spigot Left Hand Inlet with Flow to Right
_____ Z1201-HR4	4 [102] Hub and spigot Right Hand Inlet with Flow to Left

**PREFIXES**

_____ Z	D.C.C.I. System with Zurn ZZ Adjustable Coupling*
_____ ZQ	D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

**SUFFIXES**

_____ -A	Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])	_____ -F	Floor Mounted, Back Outlet Fixture Support
_____ -CC	Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])	_____ -G	Galvanized Cast Iron
_____ -CE	EZ-Set <sup>™</sup> Coupling (NPSM 6 [152] , 12 [305] or custom) (NPT 12 [305] or custom)	_____ -M	Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457])
_____ -CL	Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])	_____ -RYK17	One Piece Unistrut Pre-Fab Foot
_____ -CS	2-1/4 [57] Polymer Coupling with Integral Test Cap	_____ -VP	Vandal-Proof Trim
		_____ -X2	2 [51] Carrier Foot Extension Assembly.
		_____ -X3	3 [76] Carrier Foot Extension Assembly
		_____ -45	Finishing Frame for Siphon Jet System
		_____ -50	Flush Valve Supply Support for Water Closets

\* Regularly furnished unless otherwise specified.

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

**⚠ ADVERTENCIA: Cáncer y daño reproductivo - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

**⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited  
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

[www.zurn.com](http://www.zurn.com)

Rev. M Page 1 of 1  
Date: 06/12/24  
C.N. No. 146025  
Patent [zurn.com/patents](http://zurn.com/patents)  
Prod. | Dwg. No. Z1201-H\_4