



Z6957-XL

Wall-Mounted Battery-Powered Sensor Faucet

TAG _____

Architectural/Engineering Specification:

The Nachi faucet maintains a sleek and simple design that can be paired with a matching Nachi soap dispenser for an automatic and user-friendly handwashing solution. ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

Product Features:

- Infrared convergence-type proximity sensor
- 30 second time out feature
- Standard Chrome-plated Cast Brass Body
- Three Alternate Finishes
- In-line filter
- 4 "AA" batteries

Suffix Options:

- MV Temperature Mixing Valve
- SH Supply Hoses for Mixing Valve
- TMV-1 Thermostatic Mixing Valve for Single Faucets

Finish Options:

- BN Brushed Nickel
- PN Polished Nickel
- PB Polished Brass

Compatibility

Soap Dispenser:



Z6957-SD

Compliance and Certification:

- ADA Compliant
- ASME A112.18.1/CSA B125.1
- cUPC
- Lead Free Compliant
- Texas Accessibility Standard (TAS)



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. In Canada - Consult local codes and standards.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 - Ph. 1-855-ONE-ZURN, Fax 919-775-3541

In Canada: ZURN INDUSTRIES LIMITED 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292

Rev. A

Date: 10/17/19

C.N. No. SAN008590

Prod. | Dwg. No. SS Z6957-XL



Aerator Options:

	Flowrate GPM [LpM]	Vandal Resistant	*WaterSense Labeled	Outlet Type
-E	1.5[5.7]	✓	✓	Aerator
-F	0.5[1.9]	✓		Spray
-J	1.5[5.7]	✓	✓	Laminar
-K	1.0[3.8]	✓	✓	Laminar
-L	1.0[3.8]	✓	✓	Aerator
-N	0.5[1.9]	✓		Laminar

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

*This device is WaterSense labeled when used with the appropriate flow rate and certified for residential and private restrooms.



US 1.855.ONE.ZURN CANADA 1.905.405.8272 ZURN.COM




Z6957-XL

Wall-Mounted Battery-Powered Sensor Faucet

TAG _____


TYPICAL Z6957-XL

AquaSense Battery
Powered Faucet

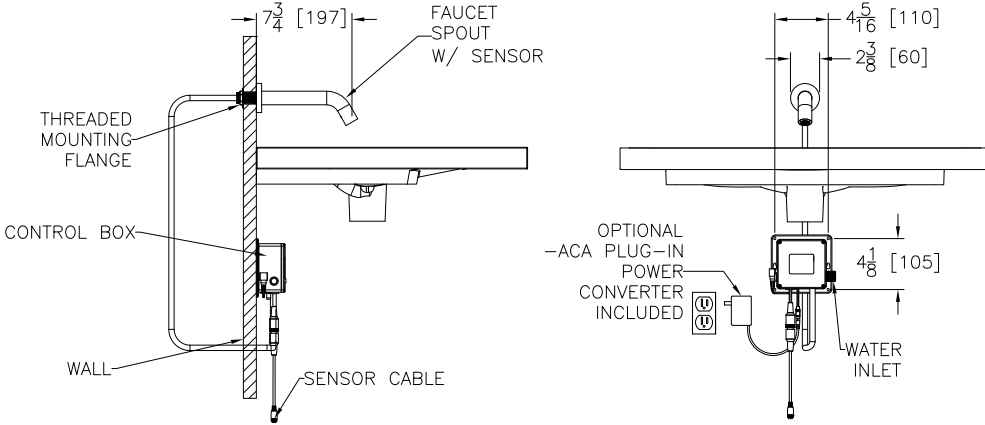


NOTE: Recommended through hole diameter to properly mount the spout/shank is 1-1/8" to 1-1/4".

Optional Mixing Valves



P6900-MT
Mixing Tee



P6900-MV
Temperature Mixing Valve

