




Z9A-PHIX

PHIX® CARTRIDGE ACID NEUTRALIZATION SYSTEM


SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

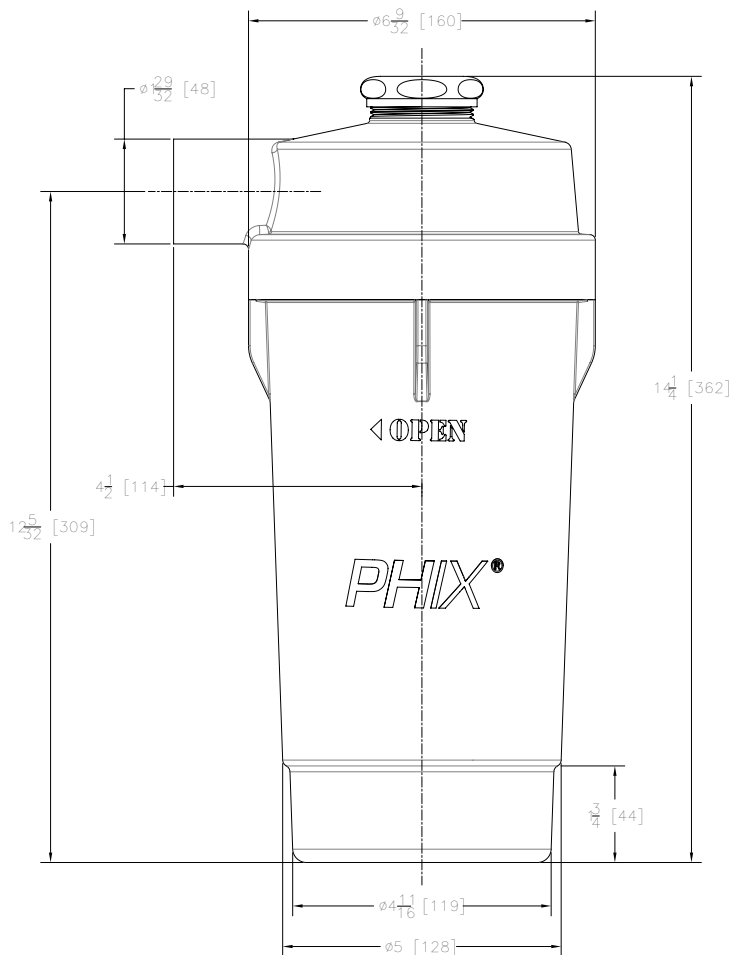

CONNECTION FOR
1 1/2" [38] DIA
TAIL PIPE

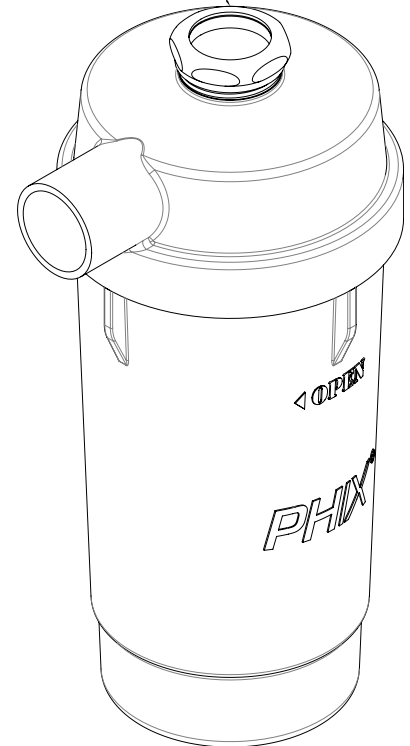

ENGINEERING SPECIFICATION: ZURN Z9A-PHIX

Point of use application, replacing standard P-trap and the need for down stream acid waste piping. PHIX® Cartridge Acid Neutralization System includes industrial strength glass-filled polypropylene body with a 1-1/2" [38mm] compression fitting inlet and 1-1/2" [38mm] No-Hub outlet, removable upper neutralization chamber, and lower sediment collection chamber. PHIX® Cartridge has a maximum flow of 8 GPM [36 LPM]. System uses PHIX® Media, a mix of non-hazardous solid alkali non-resin materials to neutralize acids in a self-contained system.

SUFFIX OPTIONS

- _____ -MEDIA Z9-PHIX-MEDIA-44 lbs (5 gal pail) Media Granules for Z9A-PHIX Tank (Approx. 20 Refills)
- _____ -FILTER Z9-PHIX Dust Stop Washable Air Filter Disc

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. H
Date: 11/30/23
C.N. No. 145691
Patent zurn.com/patents
Prod. | Dwg. No. Z9A-PHIX